SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 1012G-MTF
(H8SGL-F, AMD Opteron 6272)

SPECint®_rate2006 = 237

SPECint_rate_base2006 = 208

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2012
Hardware Availability: Nov-2011
Software Availability: Dec-2011

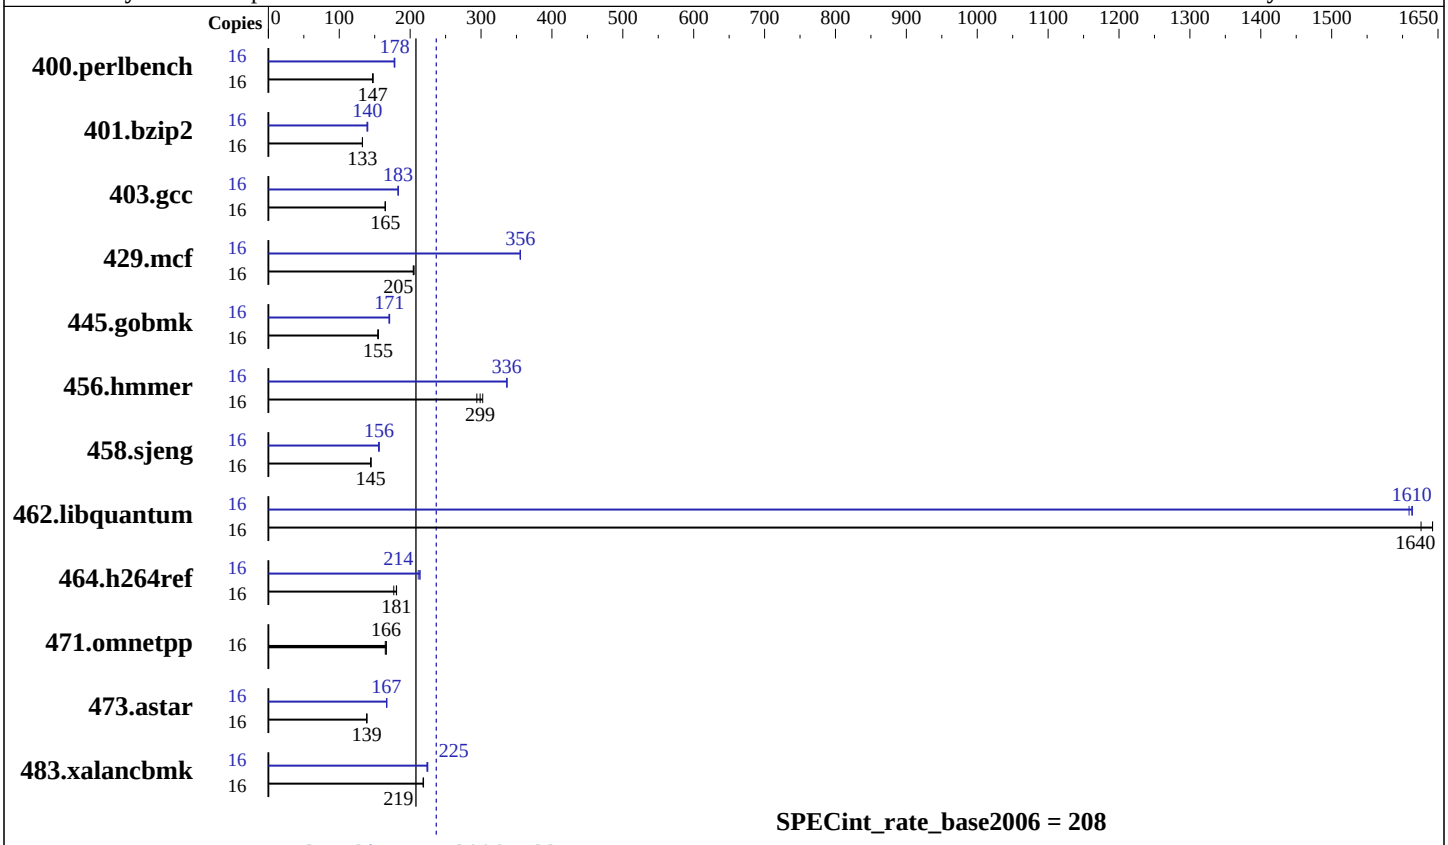

Hardware

CPU Name:	AMD Opteron 6272
CPU Characteristics:	AMD Turbo CORE technology up to 3.00 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	16 cores, 1 chip, 16 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	512 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	16 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	16 MB I+D on chip per chip, 8 MB shared / 8 cores
Other Cache:	None
Memory:	64 GB (8 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 300 GB SATA, 10000 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 4.5.1 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 10.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro A+ Server 1012G-MTF
(H8SGL-F, AMD Opteron 6272)

SPECint_rate2006 = 237

SPECint_rate_base2006 = 208

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2012
Hardware Availability: Nov-2011
Software Availability: Dec-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	1058	148	1064	147	**1061**	**147**	16	877	178	881	177	**877**	**178**
401.bzip2	16	1164	133	**1164**	**133**	1163	133	16	**1106**	**140**	1109	139	1101	140
403.gcc	16	**780**	**165**	782	165	780	165	16	**704**	**183**	704	183	703	183
429.mcf	16	710	205	714	204	**712**	**205**	16	410	356	411	355	**410**	**356**
445.gobmk	16	1087	154	**1084**	**155**	1082	155	16	987	170	981	171	**983**	**171**
456.hmmer	16	494	302	508	294	**500**	**299**	16	444	337	**444**	**336**	444	336
458.sjeng	16	**1339**	**145**	1340	144	1337	145	16	**1239**	**156**	1246	155	1239	156
462.libquantum	16	204	1630	202	1640	**202**	**1640**	16	206	1610	205	1610	**206**	**1610**
464.h264ref	16	**1961**	**181**	2002	177	1958	181	16	1656	214	1675	211	**1657**	**214**
471.omnetpp	16	601	166	**602**	**166**	606	165	16	601	166	**602**	**166**	606	165
473.astar	16	**809**	**139**	808	139	810	139	16	672	167	673	167	**673**	**167**
483.xalancbmk	16	**505**	**219**	504	219	506	218	16	**491**	**225**	494	224	491	225

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/usr/cpu2006/amd1104-rate-libs-revC/32:/usr/cpu2006/amd1104-rate-libs-revC/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6274 chips + 64GB Memory using RHEL 6.1
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-march=bdver1 -Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON
-IPA:plimit=8000 -IPA:small_pu=100 -HP:bd=2m:heap=2m -mso
-LNO:prefetch=2

C++ benchmarks:
-march=bdver1 -Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on
-D__OPEN64_FAST_SET -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2 -LNO:opt=0
-IPA:plimit=20000 -OPT:unroll_times_max=8
-OPT:unroll_size=256 -OPT:unroll_level=2 -OPT:keep_ext=on
-WOPT:if_conv=0 -WOPT:sib=on -CG:local_sched_alg=1
-CG:unroll_fb_req=on -CG:movext_icmp=off -HP:bd=2m:heap=2m

401.bzip2: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O3 -LNO:prefetch=2 -LNO:pf2=0
-OPT:alias=disjoint -OPT:goto=off -CG:local_sched_alg=1
-HP:bdt=2m:heap=2m

403.gcc: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:trip_count=256
-CG:cmp_peep=on -CG:pre_minreg_level=2 -m32
-HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on

429.mcf: -march=bdver1 -O3 -OPT:unroll_times_max=5 -ipa
-INLINE:aggressive=on -CG:gcm=off -CG:dsched=on
-GRA:prioritize_by_density=on -m32 -HP:bdt=2m:heap=2m -mso

445.gobmk: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -OPT:unroll_size=256
-OPT:unroll_times_max=8 -OPT:keep_ext=on -IPA:plimit=750
-IPA:min_hotness=300 -IPA:pu_reorder=1
-LNO:ignore_feedback=off -WOPT:if_conv=2 -HP:bd=2m:heap=2m

456.hmmer: -march=bdver1 -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:prefetch=2
-OPT:alias=disjoint -OPT:unroll_times_max=16
-OPT:unroll_size=512 -OPT:unroll_level=2 -OPT:keep_ext=on
-CG:cflow=0 -CG:cmp_peep=on -CG:pre_local_sched=off
-HP:bdt=2m:heap=2m

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-march=bdver1 -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-Ofast -CG:ptr_load_use=0`
`-CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on`
`-LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:heap=2m:bd=2m`
`-WOPT:sib=on`

462.libquantum: `-march=bdver1 -Ofast -mso -OPT:unroll_size=512`
`-OPT:unroll_times_max=16 -LNO:prefetch=2`
`-LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1`
`-CG:p2align=0 -INLINE:aggressive=ON -IPA:plimit=15000`
`-IPA:small_pu=100 -HP:bdt=2m:heap=2m,limit=300`

464.h264ref: `-march=bdver1 -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-O3 -OPT:unroll_size=256`
`-OPT:unroll_times_max=2 -IPA:plimit=20000`
`-OPT:alias=disjoint -CG:ptr_load_use=0`
`-CG:local_sched_alg=1 -HP:bdt=2m:heap=2m`

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-march=bdver1 -fb_create fbdata`(pass 1)
`-fb_opt fbdata`(pass 2) `-Ofast -TENV:frame_pointer=off`
`-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on`
`-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on`
`-OPT:alias=disjoint -INLINE:aggressive=on`
`-IPA:small_pu=3000 -IPA:plimit=3000 -m32`
`-HP:bdt=2m:heap=2m`

483.xalancbmk: `-march=bdver1 -Ofast -LNO:prefetch=2 -OPT:unroll_size=512`
`-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET`
`-INLINE:aggressive=on -m32 -CG:cmp_peep=on`
`-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on`
`-TENV:frame_pointer=off -fno-emit-exceptions`
`-L/root/work/libraries/SmartHeap-10/lib -lsmartheap`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/x86-open64-451-flags-rate-revC-I.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 09:34:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 July 2012.