



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp®2006 = 68.7**

Acer AT310 F2 (Xeon E3-1280 v2)

**SPECfp\_base2006 = 66.4**

CPU2006 license: 97


Test date: May-2012

Test sponsor: Acer Incorporated

Hardware Availability: Jan-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

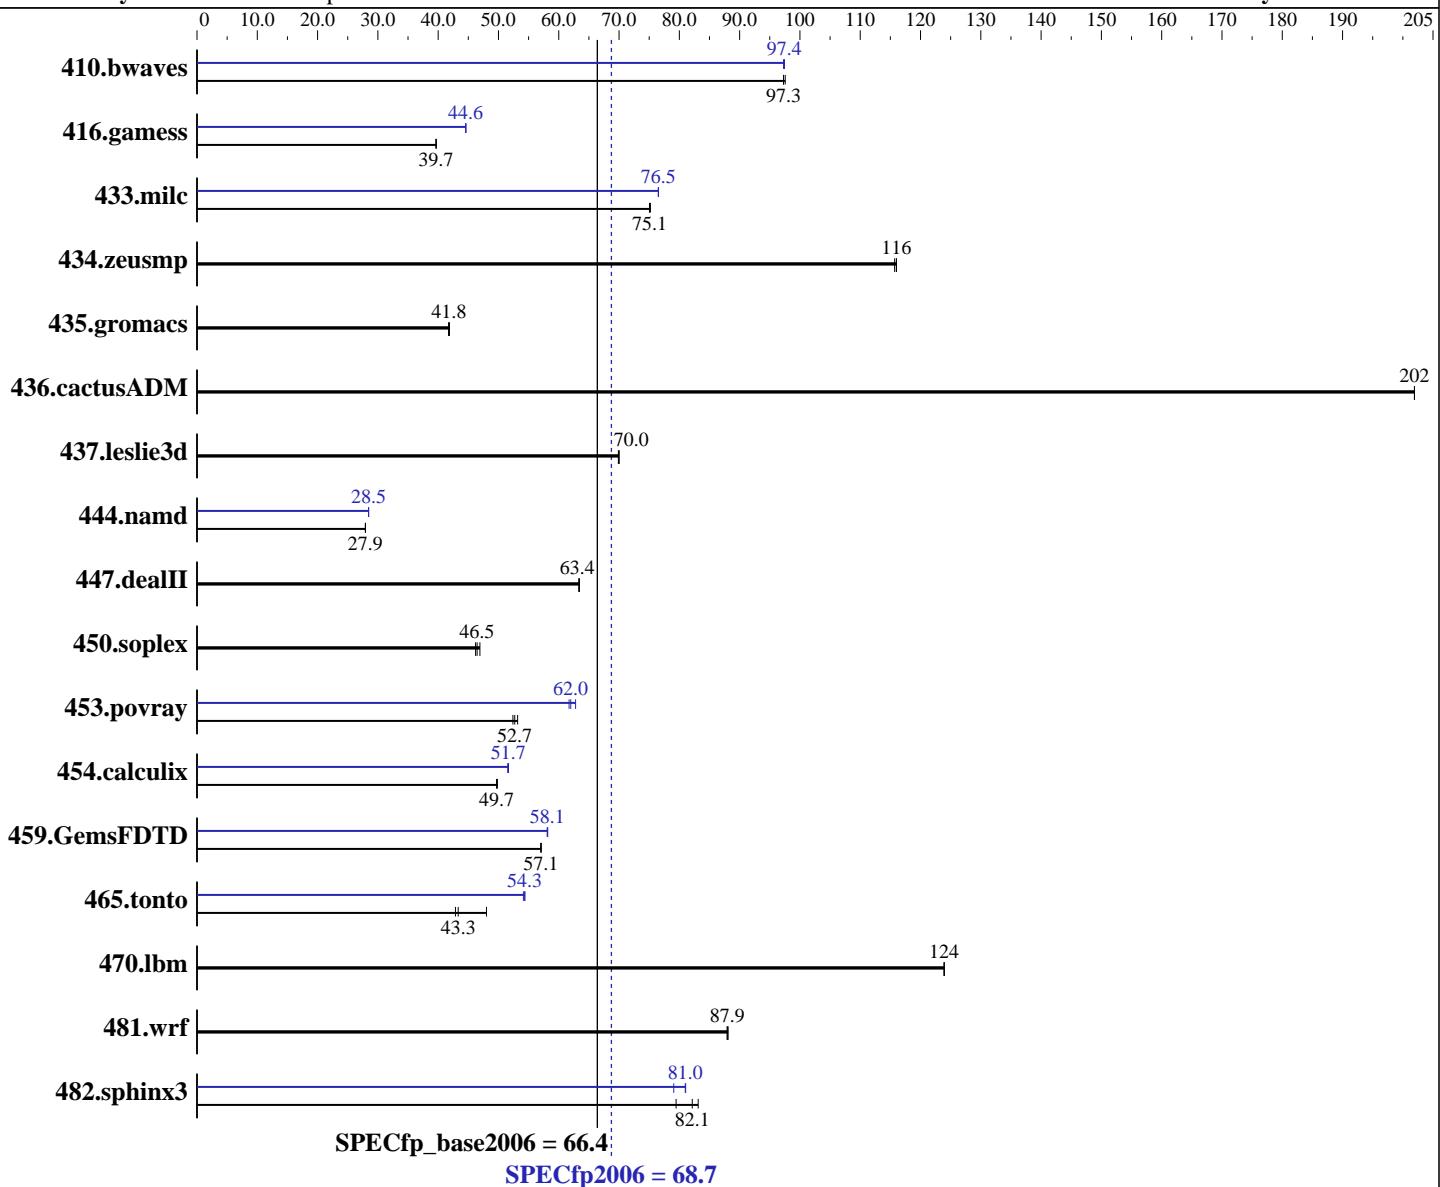

## Hardware

CPU Name: Intel Xeon E3-1280 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 4.00 GHz  
 CPU MHz: 3600  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

## Software

Operating System: Red Hat Enterprise Linux Server release 6.1 (Santiago)  
 Compiler: 2.6.32-131.0.15.el6.x86\_64  
 Auto Parallel: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 File System: Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Software Availability: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

**SPECfp2006 = 68.7**

Acer AT310 F2 (Xeon E3-1280 v2)

**SPECfp\_base2006 = 66.4**

CPU2006 license: 97

Test date: May-2012

Test sponsor: Acer Incorporated

Hardware Availability: Jan-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (2 x 8 GB 2Rx8 PC3-10600E-9,ECC)  
 Disk Subsystem: 1 x 640 GB SATA, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>140</b>	<b>97.3</b>	139	97.6	140	97.3	<b>140</b>	<b>97.3</b>	139	97.4	<b>139</b>	<b>97.4</b>
416.gamess	494	39.7	<b>494</b>	<b>39.7</b>	494	39.6	<b>439</b>	<b>44.6</b>	<b>439</b>	<b>44.6</b>	439	44.6
433.milc	122	75.0	122	75.2	<b>122</b>	<b>75.1</b>	120	76.5	<b>120</b>	<b>76.5</b>	120	76.5
434.zeusmp	78.6	116	<b>78.4</b>	<b>116</b>	78.4	116	78.6	116	<b>78.4</b>	<b>116</b>	78.4	116
435.gromacs	<b>171</b>	<b>41.8</b>	171	41.9	171	41.7	<b>171</b>	<b>41.8</b>	171	41.9	171	41.7
436.cactusADM	59.2	202	<b>59.2</b>	<b>202</b>	59.2	202	59.2	202	<b>59.2</b>	<b>202</b>	59.2	202
437.leslie3d	<b>134</b>	<b>70.0</b>	134	70.0	135	69.9	<b>134</b>	<b>70.0</b>	134	70.0	135	69.9
444.namd	<b>287</b>	<b>27.9</b>	287	27.9	287	27.9	282	28.5	282	28.4	<b>282</b>	<b>28.5</b>
447.dealII	180	63.4	<b>181</b>	<b>63.4</b>	181	63.4	180	63.4	<b>181</b>	<b>63.4</b>	181	63.4
450.soplex	180	46.2	178	46.9	<b>180</b>	<b>46.5</b>	180	46.2	178	46.9	<b>180</b>	<b>46.5</b>
453.povray	102	52.4	<b>101</b>	<b>52.7</b>	100	53.2	<b>85.8</b>	<b>62.0</b>	84.7	62.8	86.2	61.7
454.calculix	166	49.8	166	49.7	<b>166</b>	<b>49.7</b>	<b>160</b>	<b>51.7</b>	160	51.7	160	51.5
459.GemsFDTD	186	57.1	186	57.0	<b>186</b>	<b>57.1</b>	183	58.1	182	58.2	<b>183</b>	<b>58.1</b>
465.tonto	<b>227</b>	<b>43.3</b>	230	42.9	205	48.0	181	54.4	<b>181</b>	<b>54.3</b>	182	54.1
470.lbm	111	124	<b>111</b>	<b>124</b>	111	124	111	124	<b>111</b>	<b>124</b>	111	124
481.wrf	127	88.1	127	87.9	<b>127</b>	<b>87.9</b>	127	88.1	127	87.9	<b>127</b>	<b>87.9</b>
482.sphinx3	245	79.5	234	83.1	<b>237</b>	<b>82.1</b>	240	81.0	<b>241</b>	<b>81.0</b>	246	79.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

```
Sysinfo program /usr/cpu2006/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$
running on localhost.localdomain Tue May 15 04:25:34 2012
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E3-1280 V2 @ 3.60GHz
Continued on next page
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = 68.7

Acer AT310 F2 (Xeon E3-1280 v2)

SPECfp\_base2006 = 66.4

CPU2006 license: 97

Test date: May-2012

Test sponsor: Acer Incorporated

Hardware Availability: Jan-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

## Platform Notes (Continued)

```
1 "physical id"s (chips)
8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings   : 8
    physical 0: cores 0 1 2 3
    cache size : 8192 KB

From /proc/meminfo
MemTotal:      16307528 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.1 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux localhost.localdomain 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10
15:42:40 EDT 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 15 04:22 last=5

SPEC is set to: /usr/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
                ext4   50G   13G   35G  27%  /


Additional information from dmidecode:
Memory:
2x Hynix/Hyundai HMT41GU7MFR8A-H9 8 GB 1333 MHz 2 rank

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"  
OMP\_NUM\_THREADS = "4"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL6.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated	<b>SPECfp2006 =</b>	<b>68.7</b>
Acer AT310 F2 (Xeon E3-1280 v2)	<b>SPECfp_base2006 =</b>	<b>66.4</b>

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2012

Hardware Availability: Jan-2012

Software Availability: Dec-2011

## General Notes (Continued)

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

Fortran benchmarks:

    ifort -m64

Benchmarks using both Fortran and C:

    icc -m64 ifort -m64

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

    -xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
    -ansi-alias

C++ benchmarks:

    -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated	<b>SPECfp2006 =</b>	<b>68.7</b>
Acer AT310 F2 (Xeon E3-1280 v2)	<b>SPECfp_base2006 =</b>	<b>66.4</b>

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2012

Hardware Availability: Jan-2012

Software Availability: Dec-2011

## Base Optimization Flags (Continued)

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel
```

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated	<b>SPECfp2006 =</b>	<b>68.7</b>
Acer AT310 F2 (Xeon E3-1280 v2)	<b>SPECfp_base2006 =</b>	<b>66.4</b>

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: May-2012

Hardware Availability: Jan-2012

Software Availability: Dec-2011

## Peak Optimization Flags (Continued)

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = 68.7

Acer AT310 F2 (Xeon E3-1280 v2)

SPECfp\_base2006 = 66.4

CPU2006 license: 97

Test date: May-2012

Test sponsor: Acer Incorporated

Hardware Availability: Jan-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 09:41:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 July 2012.