



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp<sup>®</sup>\_rate2006 = 503

PRIMERGY CX270 S1, Intel Xeon E5-2690, 2.90 GHz

SPECfp\_rate\_base2006 = 488

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Mar-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

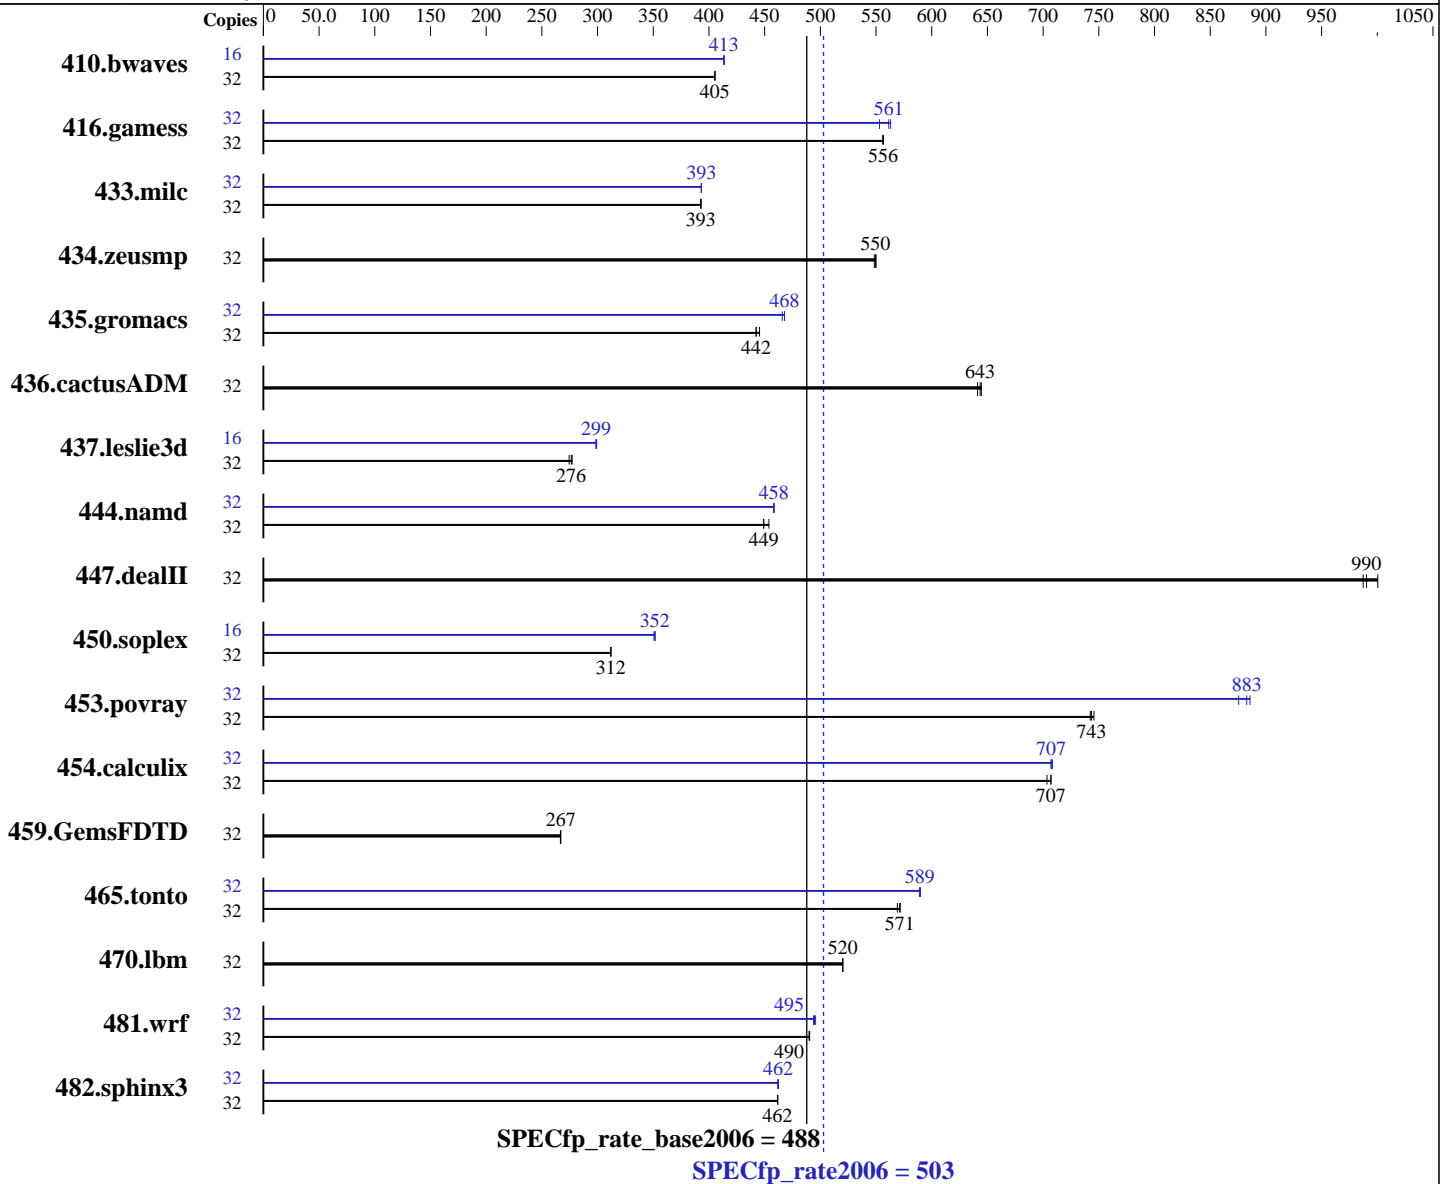

### Hardware

CPU Name: Intel Xeon E5-2690  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz  
 CPU MHz: 2900  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.293 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.293 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Fujitsu

SPECfp\_rate2006 = **503**

PRIMERGY CX270 S1, Intel Xeon E5-2690, 2.90 GHz

SPECfp\_rate\_base2006 = **488**

CPU2006 license: 19

Test date: Mar-2012

Test sponsor: Fujitsu

Hardware Availability: Jun-2012

Tested by: Fujitsu

Software Availability: Feb-2012

L3 Cache: 20 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	32	<b>1073</b>	<b>405</b>	1072	406	1073	405	16	526	413	<b>526</b>	<b>413</b>	526	414		
416.gamess	32	1127	556	1126	557	<b>1126</b>	<b>556</b>	32	1133	553	<b>1116</b>	<b>561</b>	1113	563		
433.milc	32	748	393	<b>748</b>	<b>393</b>	748	393	32	<b>747</b>	<b>393</b>	747	393	747	393		
434.zeusmp	32	<b>530</b>	<b>550</b>	531	548	529	550	32	<b>530</b>	<b>550</b>	531	548	529	550		
435.gromacs	32	<b>516</b>	<b>442</b>	517	442	513	445	32	490	466	<b>488</b>	<b>468</b>	488	468		
436.cactusADM	32	<b>594</b>	<b>643</b>	593	645	596	641	32	<b>594</b>	<b>643</b>	593	645	596	641		
437.leslie3d	32	<b>1088</b>	<b>276</b>	1096	274	1085	277	16	<b>503</b>	<b>299</b>	503	299	504	298		
444.namd	32	<b>571</b>	<b>449</b>	565	454	572	449	32	560	459	<b>560</b>	<b>458</b>	560	458		
447.dealII	32	366	1000	<b>370</b>	<b>990</b>	371	987	32	366	1000	<b>370</b>	<b>990</b>	371	987		
450.soplex	32	<b>855</b>	<b>312</b>	856	312	855	312	16	<b>380</b>	<b>352</b>	379	352	381	351		
453.povray	32	<b>229</b>	<b>743</b>	228	746	229	742	32	194	876	<b>193</b>	<b>883</b>	192	886		
454.calculix	32	<b>373</b>	<b>707</b>	373	707	375	703	32	373	707	373	708	<b>373</b>	<b>707</b>		
459.GemsFDTD	32	1272	267	1273	267	<b>1272</b>	<b>267</b>	32	1272	267	1273	267	<b>1272</b>	<b>267</b>		
465.tonto	32	551	572	553	569	<b>551</b>	<b>571</b>	32	535	589	534	590	<b>534</b>	<b>589</b>		
470.lbm	32	<b>845</b>	<b>520</b>	845	520	846	520	32	<b>845</b>	<b>520</b>	845	520	846	520		
481.wrf	32	<b>729</b>	<b>490</b>	729	490	730	490	32	724	494	721	496	<b>722</b>	<b>495</b>		
482.sphinx3	32	1350	462	1351	462	<b>1351</b>	<b>462</b>	32	1350	462	<b>1350</b>	<b>462</b>	1349	462		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
 Transparent Huge Pages enabled with:  
 echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
 runspec command invoked through numactl i.e.:  
 numactl --interleave=all runspec <etc>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 503**

PRIMERGY CX270 S1, Intel Xeon E5-2690, 2.90 GHz

**SPECfp\_rate\_base2006 = 488**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Mar-2012  
**Hardware Availability:** Jun-2012  
**Software Availability:** Feb-2012

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

Binaries compiled on a system with 2x E5-2650 CPU + 96 GB memory using RHEL6.2  
This result was measured on the PRIMERGY CX250 S1. The PRIMERGY CX250 S1 and the PRIMERGY CX270 S1 are electronically equivalent.  
For information about Fujitsu please visit: <http://www.fujitsu.com>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 503**

PRIMERGY CX270 S1, Intel Xeon E5-2690, 2.90 GHz

**SPECfp\_rate\_base2006 = 488**

**CPU2006 license:** 19  
**Test sponsor:** Fujitsu  
**Tested by:** Fujitsu

**Test date:** Mar-2012  
**Hardware Availability:** Jun-2012  
**Software Availability:** Feb-2012

## Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3`

## Peak Compiler Invocation

C benchmarks (except as noted below):

`icc -m64`

`482.sphinx3: icc -m32`

C++ benchmarks (except as noted below):

`icpc -m64`

`450.soplex: icpc -m32`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

`410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.deallI: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 503**

PRIMERGY CX270 S1, Intel Xeon E5-2690, 2.90 GHz

**SPECfp\_rate\_base2006 = 488**

**CPU2006 license:** 19

**Test date:** Mar-2012

**Test sponsor:** Fujitsu

**Hardware Availability:** Jun-2012

**Tested by:** Fujitsu

**Software Availability:** Feb-2012

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
 -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
 -no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Fujitsu**

**SPECfp\_rate2006 = 503**

PRIMERGY CX270 S1, Intel Xeon E5-2690, 2.90 GHz

**SPECfp\_rate\_base2006 = 488**

**CPU2006 license:** 19

**Test sponsor:** Fujitsu

**Tested by:** Fujitsu

**Test date:** Mar-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-auto-p32 -ansi-alias -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.01.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120313.01.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 12:27:55 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 17 July 2012.