



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp®2006 = **68.9**

NovaScale T820 F3 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp\_base2006 = **66.0**

CPU2006 license: 20


Test date: Apr-2012

Test sponsor: Bull SAS

Hardware Availability: Jun-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

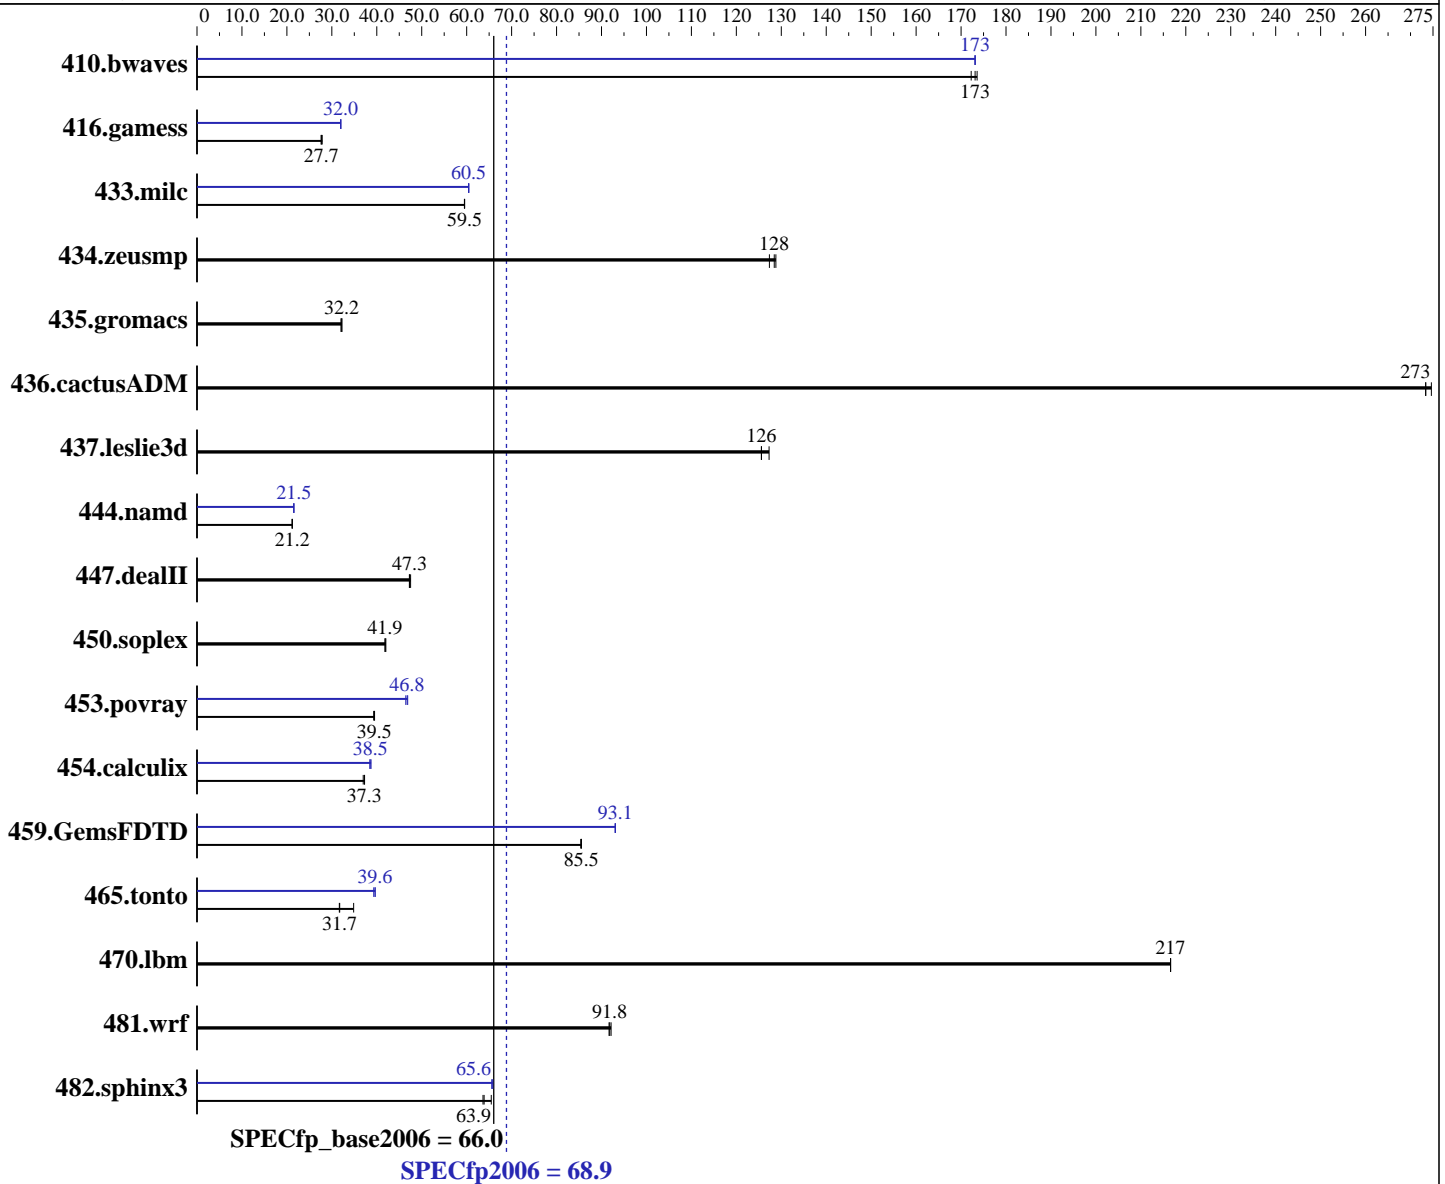

### Hardware

CPU Name: Intel Xeon E5-2470  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 1 chip, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 SP2(x86\_64)  
 3.0.13-0.27-default  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp2006 = **68.9**

NovaScale T820 F3 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp\_base2006 = **66.0**

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Apr-2012

Hardware Availability: Jun-2012

Software Availability: Feb-2012

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (6 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 300 GB 15000 RPM SAS  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	78.9	172	78.3	174	<b>78.5</b>	<b>173</b>	<b>78.5</b>	<b>173</b>	78.5	173	78.5	173
416.gamess	703	27.9	<b>707</b>	<b>27.7</b>	709	27.6	<b>612</b>	<b>32.0</b>	612	32.0	612	32.0
433.milc	<b>154</b>	<b>59.5</b>	154	59.6	154	59.5	152	60.5	152	60.4	<b>152</b>	<b>60.5</b>
434.zeusmp	<b>70.9</b>	<b>128</b>	70.7	129	71.5	127	<b>70.9</b>	<b>128</b>	70.7	129	71.5	127
435.gromacs	222	32.2	223	32.0	<b>222</b>	<b>32.2</b>	222	32.2	223	32.0	<b>222</b>	<b>32.2</b>
436.cactusADM	<b>43.7</b>	<b>273</b>	43.5	275	43.7	273	<b>43.7</b>	<b>273</b>	43.5	275	43.7	273
437.leslie3d	74.9	126	<b>74.9</b>	<b>126</b>	73.9	127	74.9	126	<b>74.9</b>	<b>126</b>	73.9	127
444.namd	379	21.2	<b>378</b>	<b>21.2</b>	378	21.2	372	21.6	<b>372</b>	<b>21.5</b>	372	21.5
447.dealII	<b>242</b>	<b>47.3</b>	241	47.5	242	47.3	<b>242</b>	<b>47.3</b>	241	47.5	242	47.3
450.soplex	198	42.0	199	41.8	<b>199</b>	<b>41.9</b>	198	42.0	199	41.8	<b>199</b>	<b>41.9</b>
453.povray	135	39.3	135	39.5	<b>135</b>	<b>39.5</b>	115	46.4	113	46.9	<b>114</b>	<b>46.8</b>
454.calculix	223	37.0	221	37.3	<b>221</b>	<b>37.3</b>	215	38.5	<b>214</b>	<b>38.5</b>	213	38.7
459.GemsFDTD	<b>124</b>	<b>85.5</b>	124	85.4	124	85.5	<b>114</b>	<b>93.1</b>	114	93.1	114	93.1
465.tonto	<b>310</b>	<b>31.7</b>	311	31.7	282	34.9	248	39.7	250	39.3	<b>248</b>	<b>39.6</b>
470.lbm	63.4	217	63.4	217	<b>63.4</b>	<b>217</b>	63.4	217	63.4	217	<b>63.4</b>	<b>217</b>
481.wrf	121	92.1	<b>122</b>	<b>91.8</b>	122	91.7	121	92.1	<b>122</b>	<b>91.8</b>	122	91.7
482.sphinx3	298	65.5	306	63.6	<b>305</b>	<b>63.9</b>	296	65.8	<b>297</b>	<b>65.6</b>	297	65.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost set to Enabled  
C States/C1E set to Enabled  
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on T320 Mon Apr 23 02:19:25 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp2006 = 68.9

NovaScale T820 F3 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp\_base2006 = 66.0

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Apr-2012  
Hardware Availability: Jun-2012  
Software Availability: Feb-2012

### Platform Notes (Continued)

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2470 0 @ 2.30GHz
    1 "physical id"s (chips)
    16 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 8
    siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  cache size : 20480 KB

From /proc/meminfo
  MemTotal:      49381732 kB
  HugePages_Total:      0
  Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*
  SuSE-release:
    SUSE Linux Enterprise Server 11 (x86_64)
    VERSION = 11
    PATCHLEVEL = 2

uname -a:
  Linux T320 3.0.13-0.27-default #1 SMP Wed Feb 15 13:33:49 UTC 2012 (d73692b)
  x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Apr 22 19:55 last=S

SPEC is set to: /root/CPU2006-1.2
  Filesystem      Type  Size  Used Avail Use% Mounted on
  /dev/sda2       ext3  226G  12G  203G   6% /

Additional information from dmidecode:

(End of data from sysinfo program)

```

### General Notes

Environment variables set by runspec before the start of the run:  
KMP\_AFFINITY = "granularity=fine,scatter"  
LD\_LIBRARY\_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64"  
OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECfp2006 = 68.9

NovaScale T820 F3 (Intel Xeon E5-2470, 2.30 GHz)

SPECfp\_base2006 = 66.0

CPU2006 license: 20

Test date: Apr-2012

Test sponsor: Bull SAS

Hardware Availability: Jun-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## General Notes (Continued)

Transparent Huge Pages disabled with:  
 echo never > /sys/kernel/mm/transparent\_hugepage/enabled  
 Filesystem page cache cleared with:  
 echo 1> /proc/sys/vm/drop\_caches  
 The Dell PowerEdge T320 and  
 the Bull NovaScale T820 F3 models are electronically equivalent.  
 The results have been measured on a Dell PowerEdge T320 model

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp2006 = 68.9**

NovaScale T820 F3 (Intel Xeon E5-2470, 2.30 GHz)

**SPECfp\_base2006 = 66.0**

CPU2006 license: 20

Test date: Apr-2012

Test sponsor: Bull SAS

Hardware Availability: Jun-2012

Tested by: Dell Inc.

Software Availability: Feb-2012

## Base Optimization Flags (Continued)

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias`

## Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel`

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECfp2006 = 68.9**

NovaScale T820 F3 (Intel Xeon E5-2470, 2.30 GHz)

**SPECfp\_base2006 = 66.0**

**CPU2006 license:** 20

**Test date:** Apr-2012

**Test sponsor:** Bull SAS

**Hardware Availability:** Jun-2012

**Tested by:** Dell Inc.

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

**SPECfp2006 = 68.9**

NovaScale T820 F3 (Intel Xeon E5-2470, 2.30 GHz)

**SPECfp\_base2006 = 66.0**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Apr-2012

**Hardware Availability:** Jun-2012

**Software Availability:** Feb-2012

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revA.20120410.00.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 09:30:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 July 2012.