SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Server X3-2L (Intel Xeon E5-2690 2.9GHz)

SPECint®_rate2006 = 705

SPECint_rate_base2006 = 630

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Apr-2012
Hardware Availability: Apr-2012
Software Availability: Jun-2012

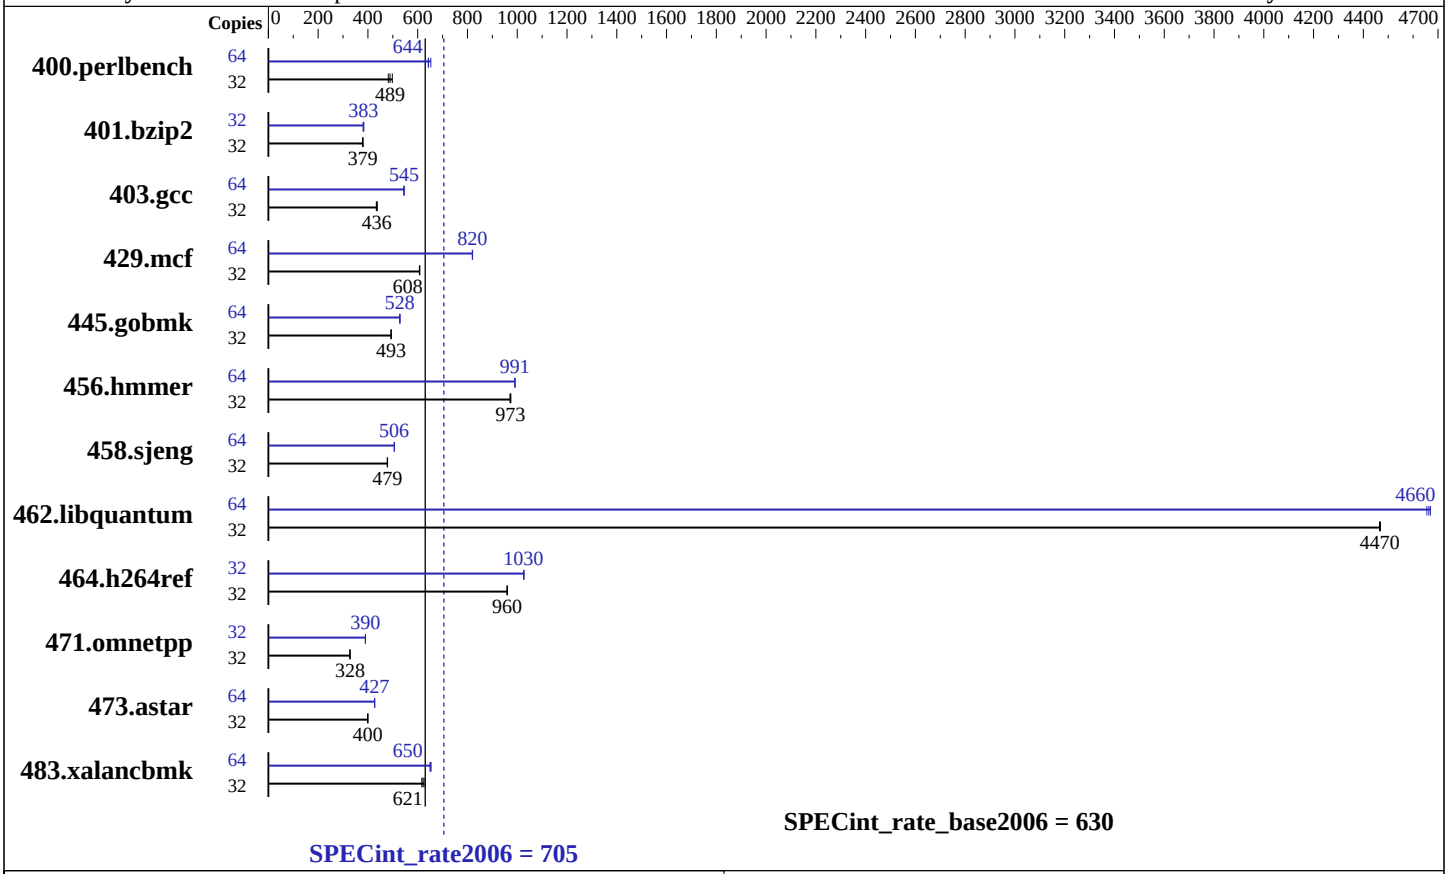

Hardware

CPU Name:	Intel Xeon E5-2690
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	2900
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1 or 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 600 GB 10K RPM SAS
Other Hardware:	None

Software

Operating System:	Oracle Solaris 11 11/11 (SRU 03)
Compiler:	C/C++: Version 12.3 of Oracle Solaris Studio (patch update 1, tested with nightly build 20120313)
Auto Parallel:	No
File System:	zfs
System State:	Default
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Oracle Corporation

Sun Server X3-2L (Intel Xeon E5-2690 2.9GHz)

SPECint_rate2006 = 705

SPECint_rate_base2006 = 630

CPU2006 license: 6
Test sponsor: Oracle Corporation
Tested by: Oracle Corporation

Test date: Apr-2012
Hardware Availability: Apr-2012
Software Availability: Jun-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	649	482	628	498	**640**	**489**	64	973	642	958	653	**972**	**644**
401.bzip2	32	**815**	**379**	812	380	816	379	32	**807**	**383**	805	383	812	380
403.gcc	32	594	434	589	437	**591**	**436**	64	**945**	**545**	944	546	946	544
429.mcf	32	480	609	**480**	**608**	481	607	64	**711**	**820**	712	819	711	821
445.gobmk	32	**680**	**493**	680	493	681	493	64	**1271**	**528**	1272	528	1270	529
456.hmmer	32	306	974	308	971	**307**	**973**	64	602	991	**603**	**991**	603	990
458.sjeng	32	808	479	**809**	**479**	811	478	64	1531	506	**1530**	**506**	1530	506
462.libquantum	32	**148**	**4470**	148	4460	148	4470	64	285	4660	284	4670	**284**	**4660**
464.h264ref	32	738	960	**738**	**960**	738	959	32	689	1030	**690**	**1030**	691	1030
471.omnetpp	32	610	328	610	328	**610**	**328**	32	**513**	**390**	512	390	513	390
473.astar	32	563	399	562	400	**562**	**400**	64	1053	427	1051	427	**1052**	**427**
483.xalancbmk	32	358	616	353	626	**355**	**621**	64	675	654	679	650	**679**	**650**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used to bind processes to CPU threads with pbind(1)
```

Operating System Notes

```
ulimit -s 10000  (shell): increases stack

/etc/system parameters
   autoup=1000
   zfs:zfs_arc_max=0x400000000
   zfs:zfs_arc_min=0x400000000
   ncsize=0x10000
   lpg_alloc_prefer=1

gzip compression set using "zfs set compression=gzip <zfs-filesystem>"
```

Platform Notes

```
Default BIOS Settings were used, except:
  Energy Performance set to Performance

Oracle's Sun Server X3-2L was formerly known as the Sun Fire X4270 M3

Single processor configuration of this system is available as of Sep-2012

Sysinfo program /export/home/gnana/cpu2006v1.2/Docs/sysinfo
: 6775  2011-08-16 #f7622badcf24e01c368b1db4377c
running on bur398-107 Thu Apr  5 13:43:53 2012
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo


From /usr/sbin/psrinfo -pv
 Intel(r) Xeon(r) CPU E5-2690 0 @ 2.90GHz
 x86 (GenuineIntel 206D7 family 6 model 45 step 7 clock 2900 MHz)

/usr/sbin/psrinfo -p:   2 chips
/usr/sbin/psrinfo -pv | grep "core has" | wc -l:  16 cores
/usr/sbin/psrinfo | wc -l: 32 threads

/usr/sbin/prtconf | grep "Memory size:": 131062 Megabytes

/etc/release:
                            Oracle Solaris 11 11/11 X86
uname -a:
SunOS bur398-107 5.11 11.0 i86pc i386 i86pc

disk: df -h
Filesystem             Size   Used  Available Capacity  Mounted on
rpool/export/home      547G   3.4G        94G     4%    /export/home

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
OMP_NUM_THREADS = "1"
```

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_X64 -DSPEC_CPU_LP64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_SOLARIS -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_SOLARIS -DSPEC_CPU_LP64
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_SOLARIS

Base Optimization Flags

C benchmarks:
-g -fast -xipo=2 -m64 -xaddr32 -xpagesize=2M -xalias_level=std

C++ benchmarks:
-fast -xipo=2 -m32 -xpagesize=2M -xalias_level=compatible
-library=stlport4 -lfast

Peak Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_X64 -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_SOLARIS
462.libquantum: -DSPEC_CPU_SOLARIS
483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

400.perlbench: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xprefetch=no%auto
-xtarget=nehalem -xipo=1 -m64 -xpagesize=2M
-xalias_level=std -lbsdmalloc

Continued on next page

Peak Optimization Flags (Continued)

401.bzip2: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M -xalias_level=strong

403.gcc: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m32
-xpagesize=2M -xalias_level=std
-W2,-Abuiltin_opt:calloc_no_support=on

429.mcf: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m32
-xpagesize_heap=2M -xpagesize_stack=4k -xalias_level=std

445.gobmk: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -m64 -xpagesize=2M
-xrestrict -xalias_level=strong

456.hmmer: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=4k -xalias_level=strong

458.sjeng: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xtarget=nehalem
-xipo=2 -m64 -xpagesize=2M -xalias_level=std

462.libquantum: -g -fast -xtarget=nehalem -xipo=2 -m64 -xpagesize=2M
-xalias_level=std -xunroll=8

464.h264ref: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m32
-xpagesize=2M -xalias_level=strong

C++ benchmarks:

471.omnetpp: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=2M -xalias_level=compatible -library=stlport4
-L/export/home/gnana/cpu2006v1.2/SmartHeap_9/lib/ -R/export/home/gnana/cpu2006v1.2/SmartHeap_9/lib/ -lsma

473.astar: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2 -m64
-xpagesize=2M -xalias_level=compatible -xrestrict
-library=stlport4 -lfast

483.xalancbmk: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xipo=2
-xpagesize=2M -xunroll=8 -library=stlport4 -lfast

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86_64.html
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.20120425.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Oracle-Solaris-Studio12.3-x86_64.xml
http://www.spec.org/cpu2006/flags/Oracle-platform-x86_64.CPUv1.2-RevA.20120425.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 11:51:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 July 2012.