



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4617, 2.90 GHz)

**SPECfp®2006 = 74.0**

**SPECfp\_base2006 = 69.2**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jun-2012

Hardware Availability: Jul-2012

Software Availability: Dec-2011

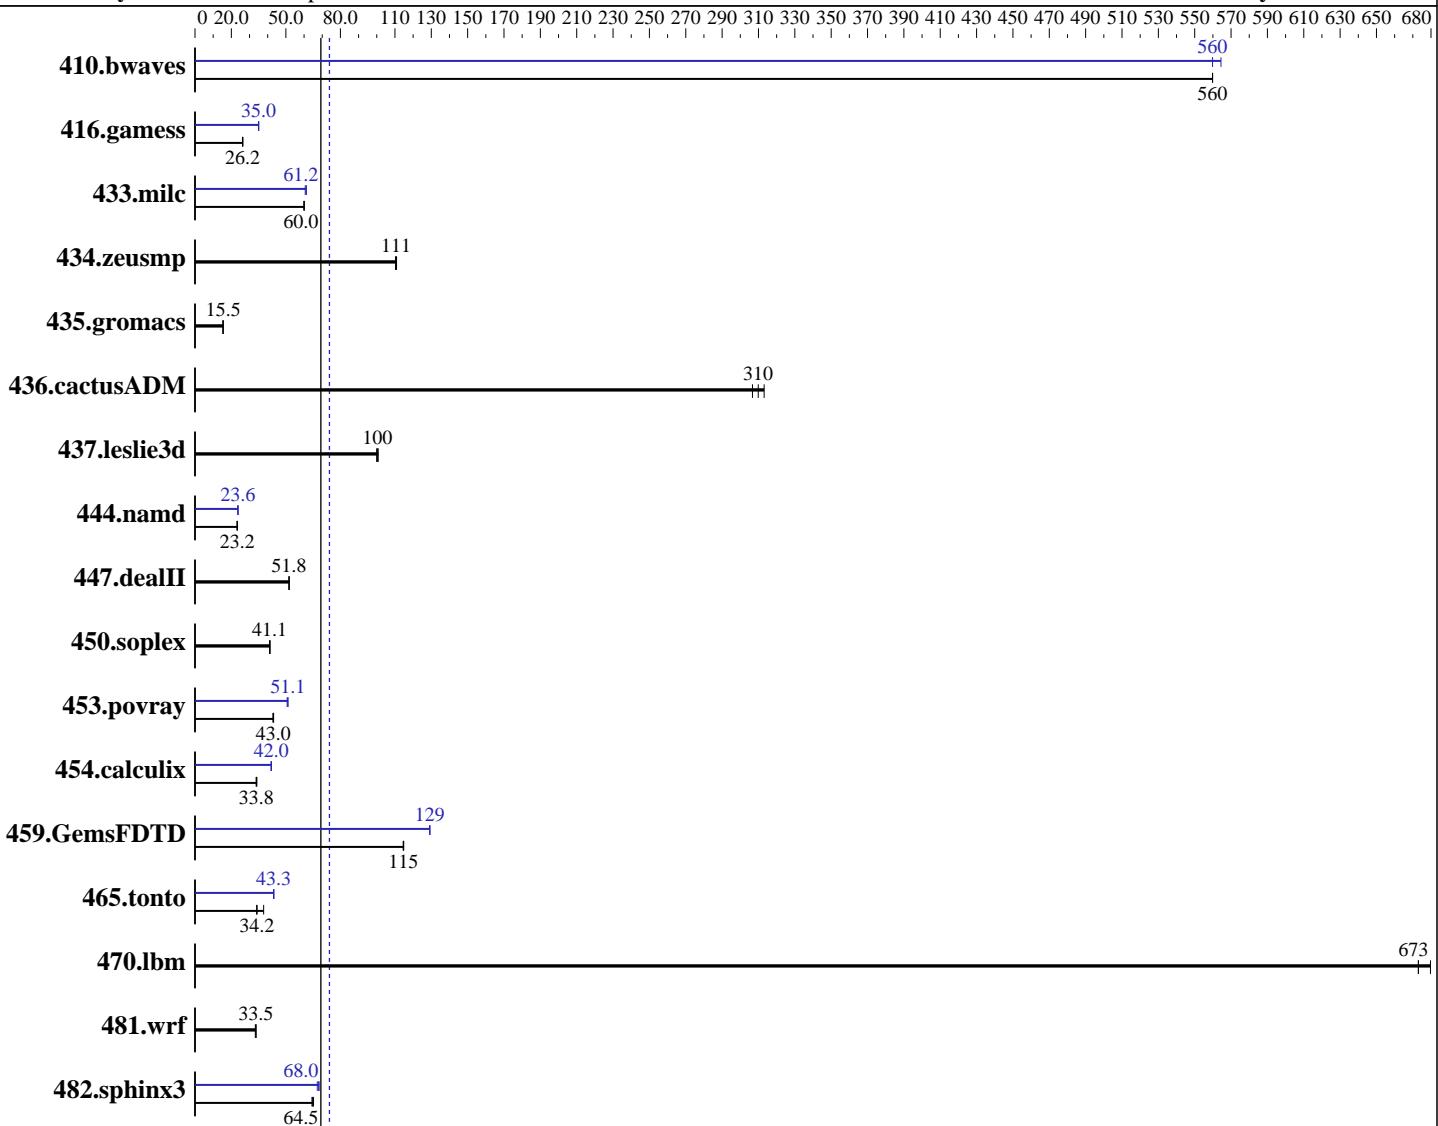

### Hardware

CPU Name: Intel Xeon E5-4617  
CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
CPU MHz: 2900  
FPU: Integrated  
CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip  
CPU(s) orderable: 1,2,3,4 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
Compiler: 2.6.32-220.el6.x86\_64  
C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
Auto Parallel: Yes  
File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4617, 2.90 GHz)

**SPECfp2006 = 74.0**

**SPECfp\_base2006 = 69.2**

CPU2006 license: 11

Test date: Jun-2012

Test sponsor: IBM Corporation

Hardware Availability: Jul-2012

Tested by: IBM Corporation

Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip  
Other Cache: None  
Memory: 256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 1 x 300 GB SAS, 10000 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio								
410.bwaves	24.3	560	24.3	560	<b>24.3</b>	<b>560</b>	<b>24.3</b>	<b>560</b>	24.3	560	24.1	564
416.gamess	743	26.3	749	26.1	<b>746</b>	<b>26.2</b>	558	35.1	561	34.9	<b>559</b>	<b>35.0</b>
433.milc	<b>153</b>	<b>60.0</b>	153	60.1	153	59.9	<b>151</b>	60.6	<b>150</b>	<b>61.2</b>	150	61.2
434.zeusmp	82.1	111	<b>82.3</b>	<b>111</b>	82.5	110	82.1	111	<b>82.3</b>	<b>111</b>	82.5	110
435.gromacs	460	15.5	<b>461</b>	<b>15.5</b>	465	15.4	460	15.5	<b>461</b>	<b>15.5</b>	465	15.4
436.cactusADM	<b>38.6</b>	<b>310</b>	39.0	307	38.2	313	<b>38.6</b>	<b>310</b>	39.0	307	38.2	313
437.leslie3d	<b>93.7</b>	<b>100</b>	93.3	101	94.1	99.9	<b>93.7</b>	<b>100</b>	93.3	101	94.1	99.9
444.namd	345	23.2	<b>345</b>	<b>23.2</b>	345	23.2	<b>340</b>	<b>23.6</b>	340	23.6	339	23.6
447.dealII	221	51.7	<b>221</b>	<b>51.8</b>	221	51.8	221	51.7	<b>221</b>	<b>51.8</b>	221	51.8
450.soplex	202	41.3	<b>203</b>	<b>41.1</b>	203	41.0	<b>202</b>	41.3	<b>203</b>	<b>41.1</b>	203	41.0
453.povray	123	43.3	124	42.9	<b>124</b>	<b>43.0</b>	<b>104</b>	<b>51.1</b>	105	50.7	104	51.1
454.calculix	242	34.0	245	33.6	<b>244</b>	<b>33.8</b>	<b>196</b>	<b>42.0</b>	197	41.8	196	42.0
459.GemsFDTD	92.4	115	92.6	115	<b>92.4</b>	<b>115</b>	<b>82.1</b>	<b>129</b>	82.1	129	82.1	129
465.tonto	<b>288</b>	<b>34.2</b>	261	37.8	290	33.9	<b>227</b>	<b>43.3</b>	227	43.4	227	43.3
470.lbm	20.2	680	<b>20.4</b>	<b>673</b>	20.4	673	20.2	680	<b>20.4</b>	<b>673</b>	20.4	673
481.wrf	333	33.6	<b>333</b>	<b>33.5</b>	337	33.2	<b>333</b>	33.6	<b>333</b>	<b>33.5</b>	337	33.2
482.sphinx3	299	65.2	<b>302</b>	<b>64.5</b>	302	64.4	<b>290</b>	<b>67.3</b>	<b>285</b>	<b>68.3</b>	<b>286</b>	<b>68.0</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Operating Mode set to Maximum Performance in BIOS  
Sysinfo program /cpu2006.1.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date::: 2011-10-11 #\\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on kong-pete Fri Jun 1 15:14:18 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4617, 2.90 GHz)

**SPECfp2006 = 74.0**

**SPECfp\_base2006 = 69.2**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jun-2012

**Hardware Availability:** Jul-2012

**Software Availability:** Dec-2011

## Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) CPU E5-4617 0 @ 2.90GHz
        4 "physical id"s (chips)
        24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 6
siblings   : 6
physical 0: cores 0 1 2 3 4 5
physical 1: cores 0 1 2 3 4 5
physical 2: cores 0 1 2 3 4 5
physical 3: cores 0 1 2 3 4 5
cache size : 15360 KB

From /proc/meminfo
MemTotal:      264510108 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux kong-pete 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jun 1 13:49

SPEC is set to: /cpu2006.1.2
Filesystem      Type    Size  Used Avail Use% Mounted on
/dev/mapper/vg_kongpete-lv_root
                  ext4    264G   6.0G  245G   3%  /


Additional information from dmidecode:
Memory:
11x Hynix HMT31GR7CFR4C-PB 8 GB 1600 MHz 2 rank
15x Micron 36JSF1G72PZ-1G6M1 8 GB 1600 MHz 2 rank
6x Samsung M393B1K70DH0-CK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

KMP\_AFFINITY = "granularity=fine,compact,1,0"

LD\_LIBRARY\_PATH = "/cpu2006.1.2/libs/32:/cpu2006.1.2/libs/64"

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4617, 2.90 GHz)

**SPECfp2006 = 74.0**

**SPECfp\_base2006 = 69.2**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jun-2012

**Hardware Availability:** Jul-2012

**Software Availability:** Dec-2011

## General Notes (Continued)

OMP\_NUM\_THREADS = "24"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages disabled with:  
echo never > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4617, 2.90 GHz)

**SPECfp2006 = 74.0**

**SPECfp\_base2006 = 69.2**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jun-2012

**Hardware Availability:** Jul-2012

**Software Availability:** Dec-2011

## Base Optimization Flags (Continued)

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias
```

## Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel
```

C++ benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4617, 2.90 GHz)

**SPECfp2006 = 74.0**

**SPECfp\_base2006 = 69.2**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jun-2012

**Hardware Availability:** Jul-2012

**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -scalar-rep -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll14

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-SNB-C.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3750 M4  
(Intel Xeon E5-4617, 2.90 GHz)

**SPECfp2006 =** 74.0

**SPECfp\_base2006 =** 69.2

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Jun-2012

**Hardware Availability:** Jul-2012

**Software Availability:** Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Mon Sep 15 15:47:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 14 August 2012.