



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp®_rate2006 = 101

PRIMERGY TX150 S8, Intel Xeon E5-2407, 2.20 GHz

SPECfp_rate_base2006 = 98.9

CPU2006 license: 19


Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

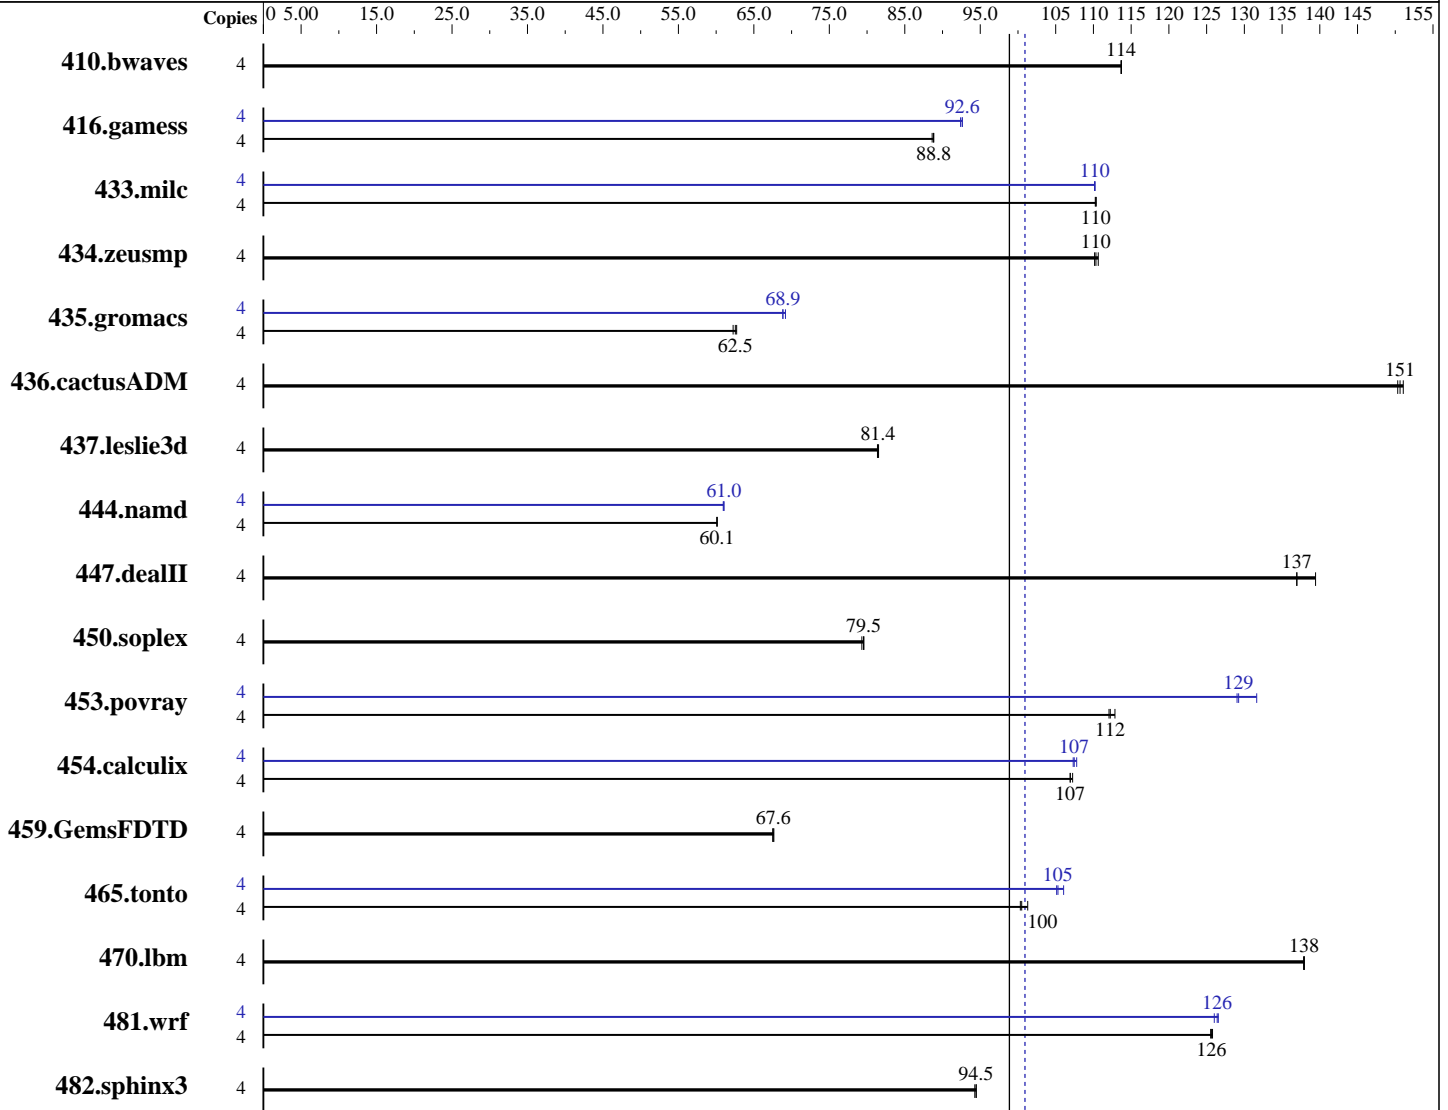

SPECfp_rate_base2006 = 98.9

SPECfp_rate2006 = 101

Hardware

CPU Name: Intel Xeon E5-2407
 CPU Characteristics:
 CPU MHz: 2200
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.293 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.293 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 101

PRIMERGY TX150 S8, Intel Xeon E5-2407, 2.20 GHz

SPECfp_rate_base2006 = 98.9

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 48 GB (6 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1067 MHz and CL7)
 Disk Subsystem: 1 x SATA, 500 GB, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	4	478	114	478	114	478	114	4	478	114	478	114	478	114		
416.gamess	4	884	88.6	882	88.8	882	88.8	4	846	92.6	848	92.4	846	92.6		
433.milc	4	333	110	333	110	333	110	4	333	110	333	110	333	110		
434.zeusmp	4	329	111	330	110	330	110	4	329	111	330	110	330	110		
435.gromacs	4	459	62.3	455	62.7	457	62.5	4	413	69.2	415	68.8	415	68.9		
436.cactusADM	4	318	150	316	151	317	151	4	318	150	316	151	317	151		
437.leslie3d	4	462	81.4	461	81.5	462	81.4	4	462	81.4	461	81.5	462	81.4		
444.namd	4	533	60.1	534	60.1	534	60.1	4	526	60.9	526	61.0	526	61.0		
447.dealII	4	328	139	334	137	334	137	4	328	139	334	137	334	137		
450.soplex	4	421	79.3	419	79.6	419	79.5	4	421	79.3	419	79.6	419	79.5		
453.povray	4	190	112	190	112	189	113	4	162	132	165	129	165	129		
454.calculix	4	309	107	308	107	309	107	4	307	107	306	108	307	107		
459.GemsFDTD	4	628	67.6	627	67.6	629	67.5	4	628	67.6	627	67.6	629	67.5		
465.tonto	4	392	100	389	101	392	100	4	371	106	374	105	374	105		
470.lbm	4	399	138	398	138	398	138	4	399	138	398	138	398	138		
481.wrf	4	355	126	356	126	356	126	4	355	126	353	127	353	126		
482.sphinx3	4	825	94.5	825	94.5	827	94.3	4	825	94.5	825	94.5	827	94.3		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 101

PRIMERGY TX150 S8, Intel Xeon E5-2407, 2.20 GHz

SPECfp_rate_base2006 = 98.9

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

General Notes

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

Binaries compiled on a system with 2x E5-2650 CPU + 96 GB
memory using RHEL6.2
For information about Fujitsu please visit: <http://www.fujitsu.com>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 101

PRIMERGY TX150 S8, Intel Xeon E5-2407, 2.20 GHz

SPECfp_rate_base2006 = 98.9

CPU2006 license: 19

Test date: Jun-2012

Test sponsor: Fujitsu

Hardware Availability: Jul-2012

Tested by: Fujitsu

Software Availability: Feb-2012

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-opt-mem-layout-trans=3
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: basepeak = yes
```

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 101

PRIMERGY TX150 S8, Intel Xeon E5-2407, 2.20 GHz

SPECfp_rate_base2006 = 98.9

CPU2006 license: 19

Test date: Jun-2012

Test sponsor: Fujitsu

Hardware Availability: Jul-2012

Tested by: Fujitsu

Software Availability: Feb-2012

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch
-auto-p32 -ansi-alias -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

SPECfp_rate2006 = 101

PRIMERGY TX150 S8, Intel Xeon E5-2407, 2.20 GHz

SPECfp_rate_base2006 = 98.9

CPU2006 license: 19

Test sponsor: Fujitsu

Tested by: Fujitsu

Test date: Jun-2012

Hardware Availability: Jul-2012

Software Availability: Feb-2012

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 11:06:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 August 2012.