SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX150 S8, Intel Xeon E5-2430L, 2.0 GHz

SPECint®_rate2006 = 198

SPECint_rate_base2006 = 189

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: May-2012
Hardware Availability: Jul-2012
Software Availability: Feb-2012

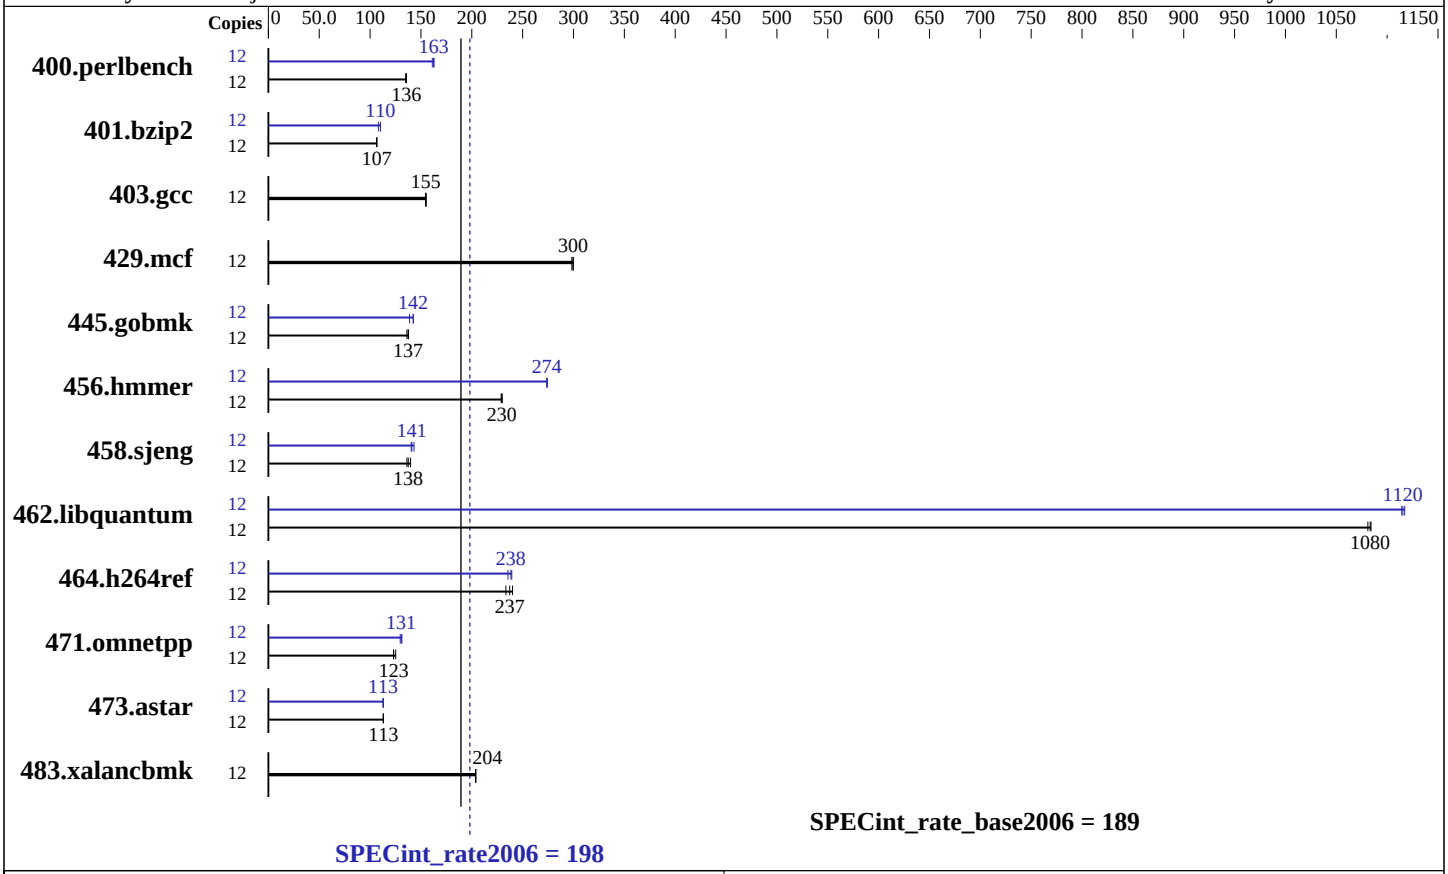

Hardware

CPU Name:	Intel Xeon E5-2430L
CPU Characteristics:	Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	6 cores, 1 chip, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	48 GB (6 x 8 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz and CL9)
Disk Subsystem:	1 x SATA, 500 GB, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.293 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu

PRIMERGY TX150 S8, Intel Xeon E5-2430L, 2.0 GHz

SPECint_rate2006 = 198

SPECint_rate_base2006 = 189

CPU2006 license: 19
Test sponsor: Fujitsu
Tested by: Fujitsu

Test date: May-2012
Hardware Availability: Jul-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	864	136	**864**	**136**	869	135	12	727	161	**721**	**163**	720	163
401.bzip2	12	**1087**	**107**	1088	106	1086	107	12	1071	108	1051	110	**1051**	**110**
403.gcc	12	625	155	**624**	**155**	623	155	12	625	155	**624**	**155**	623	155
429.mcf	12	367	298	365	300	**365**	**300**	12	367	298	365	300	**365**	**300**
445.gobmk	12	913	138	**916**	**137**	924	136	12	**884**	**142**	907	139	884	142
456.hmmer	12	487	230	489	229	**488**	**230**	12	**409**	**274**	408	274	409	274
458.sjeng	12	1066	136	**1056**	**138**	1038	140	12	**1029**	**141**	1014	143	1034	140
462.libquantum	12	230	1080	**230**	**1080**	229	1080	12	223	1120	**223**	**1120**	223	1110
464.h264ref	12	1106	240	**1119**	**237**	1137	234	12	1110	239	**1114**	**238**	1127	236
471.omnetpp	12	610	123	599	125	**609**	**123**	12	571	131	579	130	**574**	**131**
473.astar	12	744	113	**745**	**113**	746	113	12	**746**	**113**	745	113	747	113
483.xalancbmk	12	406	204	406	204	**406**	**204**	12	406	204	406	204	**406**	**204**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/SPECcpu2006/libs/32:/SPECcpu2006/libs/64"

 Binaries compiled on a system with 2x E5-2650 CPU + 96 GB
 memory using RHEL6.2
 For information about Fujitsu please visit: http://www.fujitsu.com
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3 -Wl,-z,muldefs -L/opt/SmartHeap/lib -lsmartheap

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html`
`http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml`
`http://www.spec.org/cpu2006/flags/Fujitsu-Platform.20120320.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 11:04:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 August 2012.