SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017B-URF(X9DBU-IF, Intel Xeon E5-2470)

SPECfp®_rate2006 = 405

SPECfp_rate_base2006 = 391

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2012
Hardware Availability: May-2012
Software Availability: Dec-2011

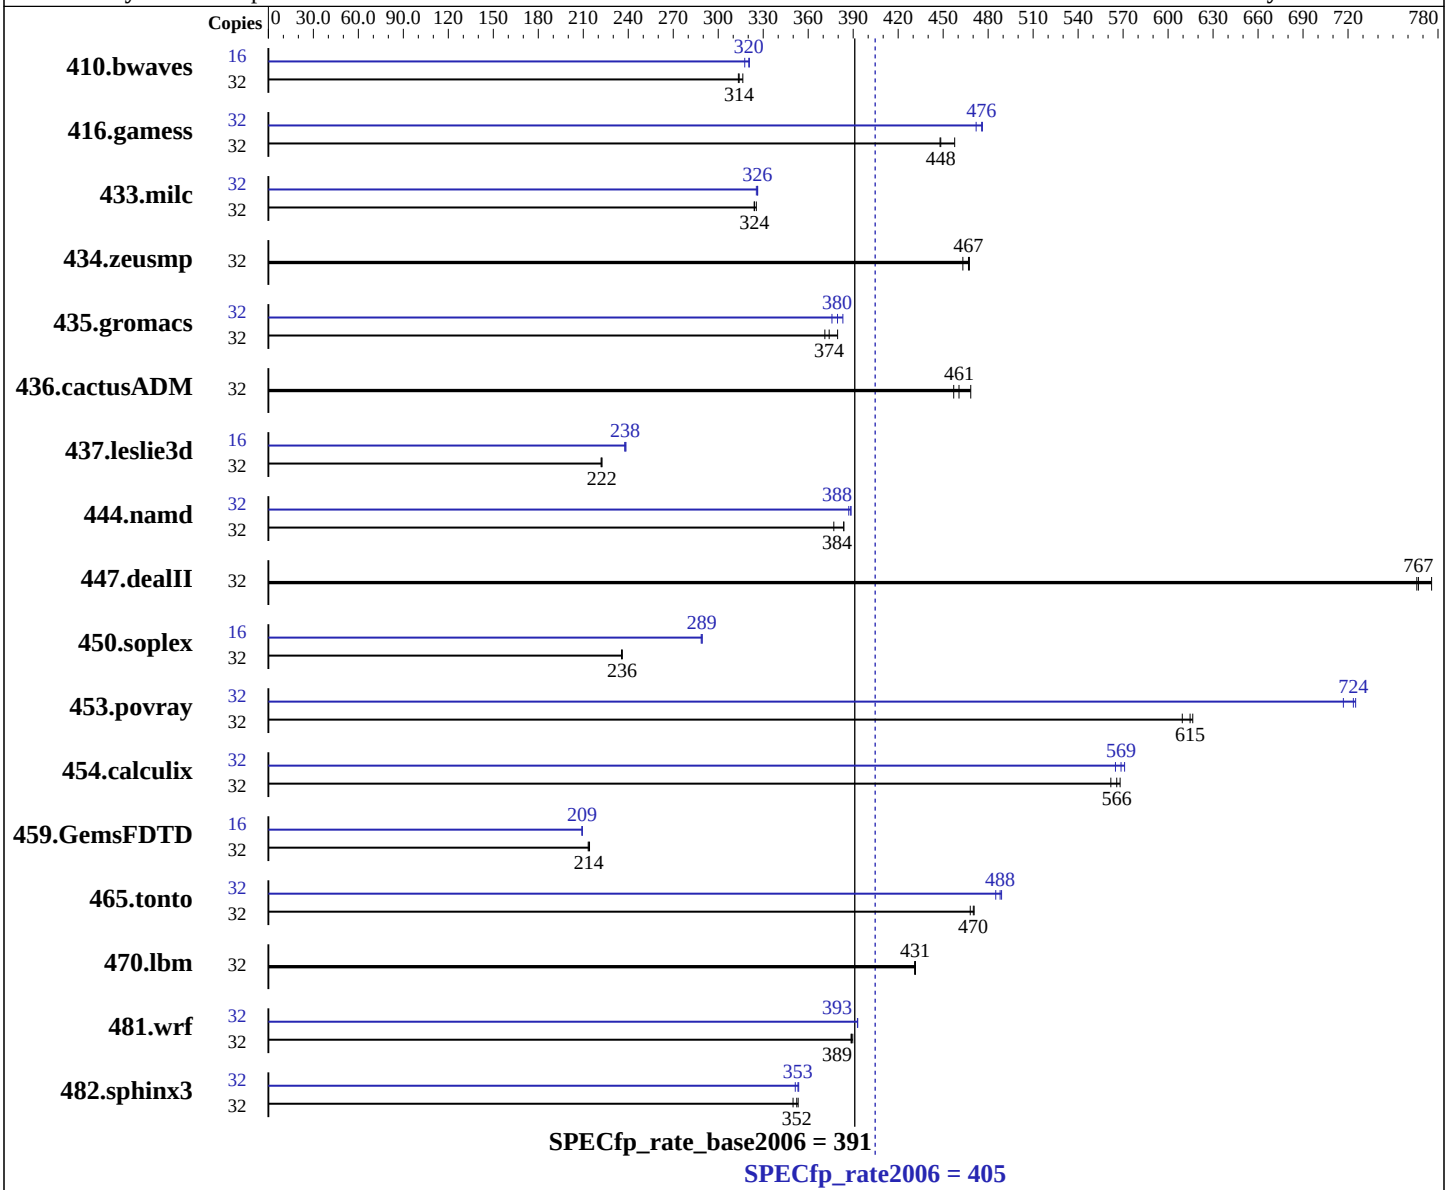

Hardware

CPU Name:	Intel Xeon E5-2470
CPU Characteristics:	Intel Turbo Boost Technology up to 3.10 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server Release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

SuperServer 6017B-URF(X9DBU-IF, Intel Xeon E5-2470)

SPECfp_rate2006 = 405

SPECfp_rate_base2006 = 391

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: May-2012
Hardware Availability: May-2012
Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 1 TB SATA II, 7200 RPM
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	**1385**	**314**	1387	313	1374	316	16	**679**	**320**	678	321	684	318
416.gamess	32	**1397**	**448**	1399	448	1369	458	32	**1317**	**476**	1316	476	1327	472
433.milc	32	**906**	**324**	907	324	903	325	32	**900**	**326**	900	326	903	325
434.zeusmp	32	629	463	**624**	**467**	623	468	32	629	463	**624**	**467**	623	468
435.gromacs	32	**611**	**374**	616	371	602	380	32	**602**	**380**	596	383	608	376
436.cactusADM	32	**830**	**461**	837	457	816	468	32	**830**	**461**	837	457	816	468
437.leslie3d	32	1356	222	**1353**	**222**	1352	222	16	631	238	**632**	**238**	633	238
444.namd	32	681	377	**669**	**384**	669	384	32	**661**	**388**	661	388	663	387
447.dealII	32	478	766	**477**	**767**	472	776	32	478	766	**477**	**767**	472	776
450.soplex	32	1133	236	1131	236	**1131**	**236**	16	462	289	**462**	**289**	461	289
453.povray	32	279	609	**277**	**615**	276	616	32	235	725	**235**	**724**	237	717
454.calculix	32	470	562	465	568	**467**	**566**	32	462	571	**464**	**569**	467	565
459.GemsFDTD	32	1592	213	**1589**	**214**	1585	214	16	**811**	**209**	811	209	811	209
465.tonto	32	673	468	669	471	**670**	**470**	32	644	489	**645**	**488**	649	485
470.lbm	32	1020	431	**1019**	**431**	1019	432	32	1020	431	**1019**	**431**	1019	432
481.wrf	32	920	389	**919**	**389**	917	390	32	910	393	**910**	**393**	910	393
482.sphinx3	32	1782	350	**1770**	**352**	1765	353	32	1763	354	**1766**	**353**	1775	351

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"
```

Continued on next page

General Notes (Continued)

```
Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
memory using RHEL5.5
Transparent Huge Pages disabled with:
echo never  > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4 -auto -inline-calloc -opt-malloc-options=3`

Benchmarks using both Fortran and C:

435.gromacs: `-xAVX`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -static -auto-ilp32 -opt-mem-layout-trans=3`

436.cactusADM: `basepeak = yes`

454.calculix: `-xAVX -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-mem-layout-trans=3`

481.wrf: `Same as 454.calculix`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml
http://www.spec.org/cpu2006/flags/Supermicro-Platform-Settings-revA.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 10:32:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 September 2012.