SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B22 M3 (Intel Xeon E5-2450, 2.10 GHz)

SPECfp®_rate2006 = 401

SPECfp_rate_base2006 = 391

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Jul-2012
Hardware Availability: Aug-2012
Software Availability: Feb-2012

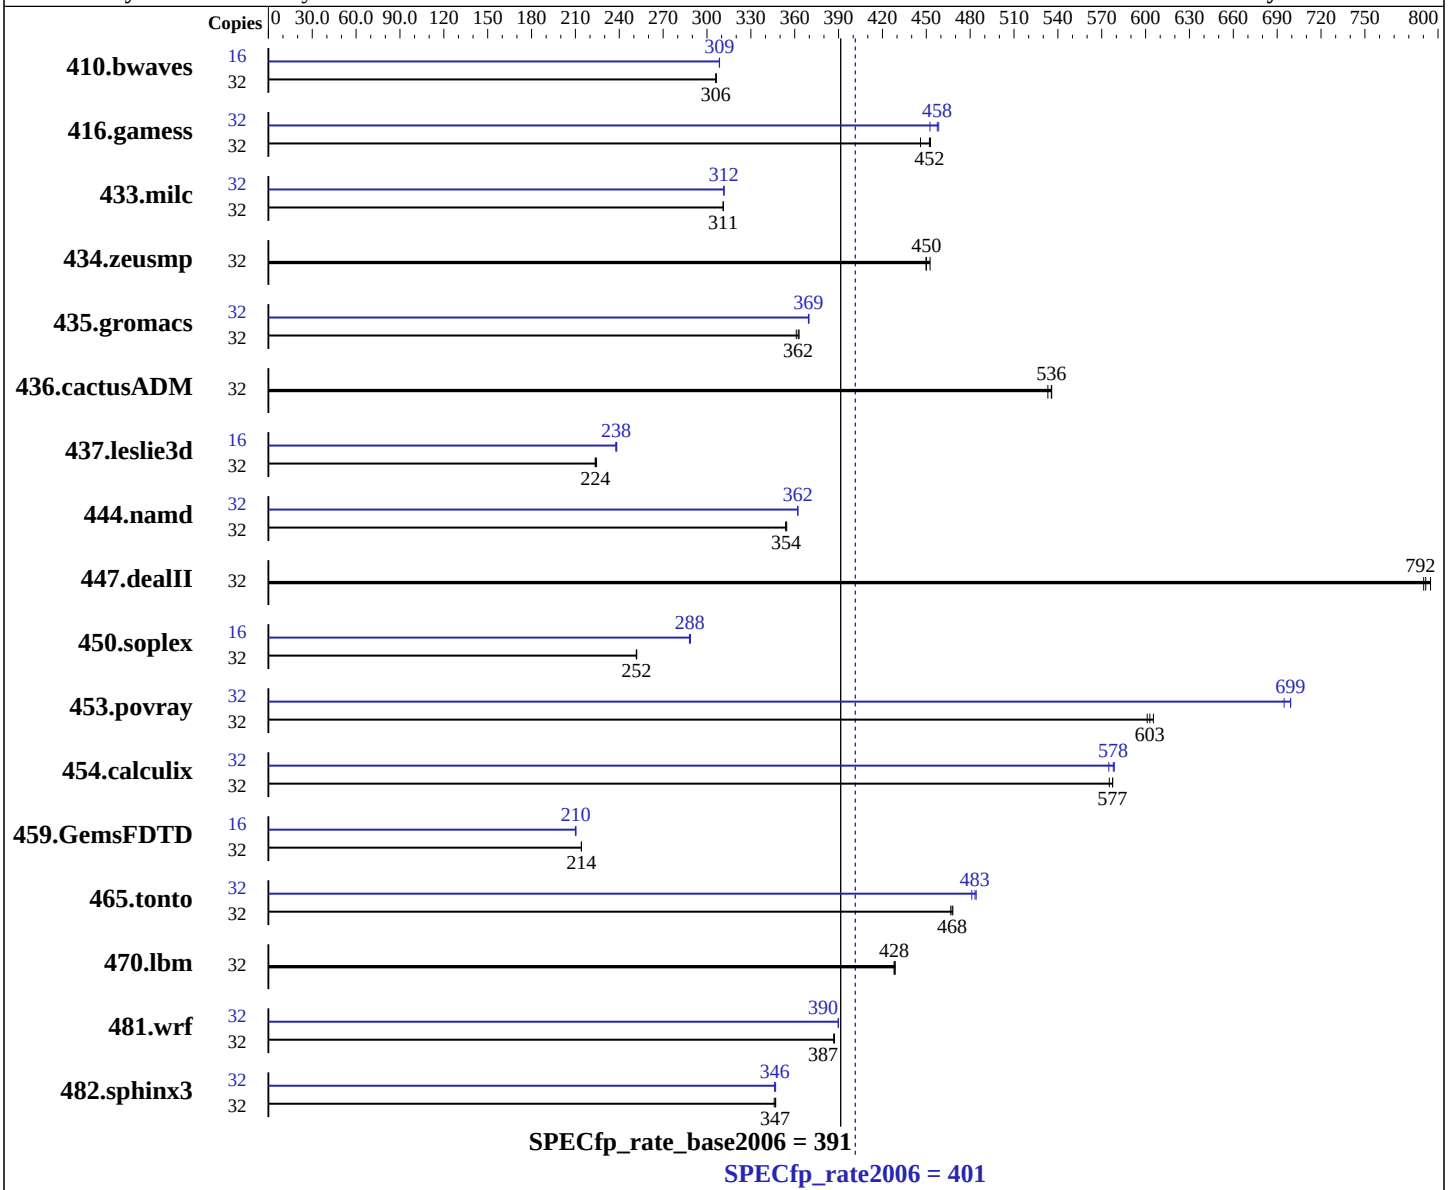

Hardware

CPU Name:	Intel Xeon E5-2450
CPU Characteristics:	Intel Turbo Boost Technology up to 2.90 GHz
CPU MHz:	2100
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.3.293 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B22 M3 (Intel Xeon E5-2450, 2.10 GHz)

SPECfp_rate2006 = 401

SPECfp_rate_base2006 = 391

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Jul-2012
Hardware Availability: Aug-2012
Software Availability: Feb-2012

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 X 146 GB 15000 RPM SAS
Other Hardware: None

System State: Run level 3 (multi-user)
Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1421	306	**1421**	**306**	1419	306	16	705	309	705	308	**705**	**309**
416.gamess	32	1405	446	**1386**	**452**	1384	453	32	**1369**	**458**	1385	453	1367	458
433.milc	32	**944**	**311**	944	311	944	311	32	943	312	943	312	**943**	**312**
434.zeusmp	32	643	453	647	450	**647**	**450**	32	643	453	647	450	**647**	**450**
435.gromacs	32	633	361	**630**	**362**	629	363	32	619	369	**618**	**369**	618	370
436.cactusADM	32	717	533	714	536	**714**	**536**	32	717	533	714	536	**714**	**536**
437.leslie3d	32	**1345**	**224**	1345	224	1340	224	16	633	238	**632**	**238**	631	238
444.namd	32	725	354	**725**	**354**	724	355	32	**709**	**362**	709	362	709	362
447.dealII	32	461	795	463	790	**462**	**792**	32	461	795	463	790	**462**	**792**
450.soplex	32	1061	252	**1060**	**252**	1059	252	16	**463**	**288**	462	289	463	288
453.povray	32	**282**	**603**	281	605	283	601	32	**244**	**699**	245	695	243	699
454.calculix	32	**457**	**577**	457	577	459	575	32	456	579	**457**	**578**	459	575
459.GemsFDTD	32	**1586**	**214**	1585	214	1586	214	16	808	210	807	210	**807**	**210**
465.tonto	32	675	467	673	468	**673**	**468**	32	**652**	**483**	650	484	654	481
470.lbm	32	**1027**	**428**	1027	428	1025	429	32	**1027**	**428**	1027	428	1025	429
481.wrf	32	923	387	**924**	**387**	924	387	32	917	390	917	390	**917**	**390**
482.sphinx3	32	1803	346	**1799**	**347**	1797	347	32	1798	347	**1801**	**346**	1801	346

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on localhost.localdomain Sun Jul 15 23:08:41 2012
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2450 0 @ 2.10GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 16
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7
   cache size : 20480 KB

From /proc/meminfo
   MemTotal:       99006352 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
   EST 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jul 15 23:02

SPEC is set to: /opt/cpu2006-1.2
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/sda1      ext4    134G  9.9G  118G   8% /

Additional information from dmidecode:
  Memory:
   12x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank

(End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"
Intel HT Technology=enable
 Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches

Submitted_by: "Sheshgiri I (shei)" <shei@cisco.com>
Submitted: Mon Sep 17 04:19:23 EDT 2012
Submission: cpu2006-20120917-24473.sub
```

Base Compiler Invocation

C benchmarks:
```
icc   -m64
```

C++ benchmarks:
```
icpc  -m64
```

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Base Portability Flags

```
    410.bwaves: -DSPEC_CPU_LP64
    416.gamess: -DSPEC_CPU_LP64
      433.milc: -DSPEC_CPU_LP64
    434.zeusmp: -DSPEC_CPU_LP64
    435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    437.leslie3d: -DSPEC_CPU_LP64
     444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
      465.tonto: -DSPEC_CPU_LP64
      470.lbm: -DSPEC_CPU_LP64
      481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
    482.sphinx3: -DSPEC_CPU_LP64
```

Base Optimization Flags

C benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:
```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:
```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc   -m64
```

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
```
icpc  -m64
```

450.soplex: `icpc -m32`

Fortran benchmarks:
```
ifort -m64
```

Benchmarks using both Fortran and C:
```
icc   -m64 ifort -m64
```

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -static -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32 -opt-mem-layout-trans=3

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo -O3 -no-prec-div -prof-use(pass 2) -xSSE4.2 -opt-prefetch -static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 12:46:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 October 2012.