



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp®2006 = 89.4

Acer AW2000h-AW170h F2 (Intel Xeon E5-2690)

SPECfp_base2006 = 84.4

CPU2006 license: 97


Test date: Sep-2012

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

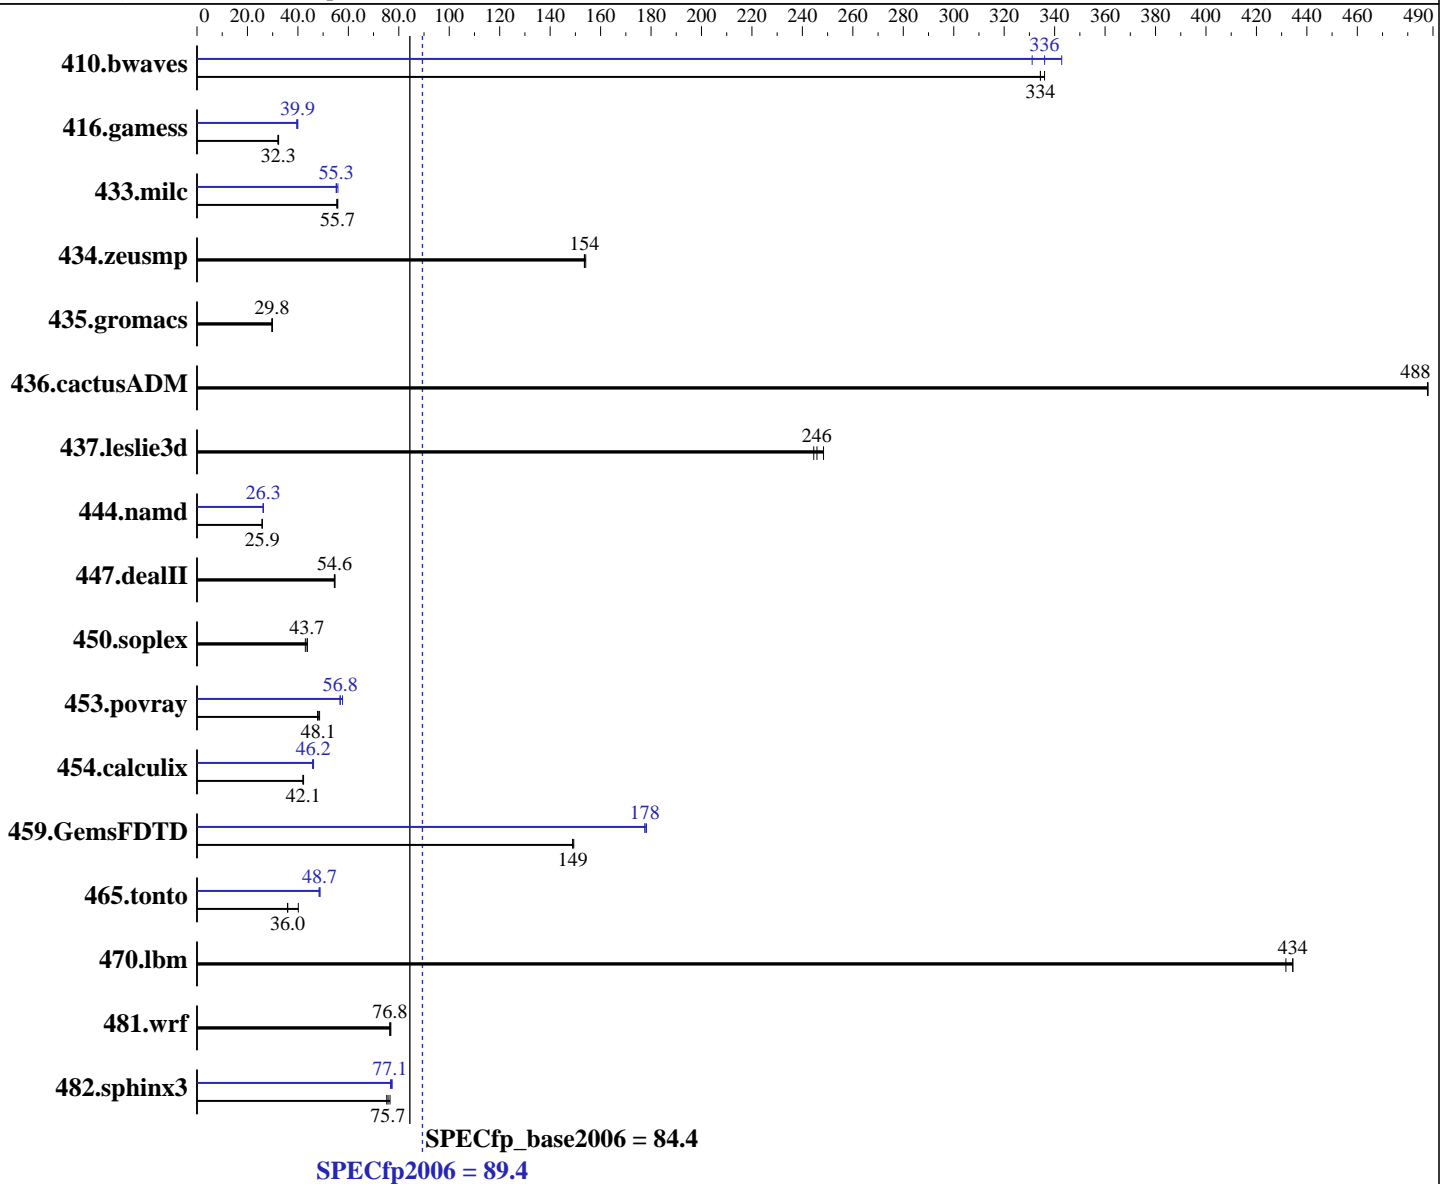

Hardware

CPU Name: Intel Xeon E5-2690
 CPU Characteristics: Intel Turbo Boost Technology up to 3.80 GHz
 CPU MHz: 2900
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 2.6.32-220.el6.x86_64
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = **89.4**

Acer AW2000h-AW170h F2 (Intel Xeon E5-2690)

SPECfp_base2006 = **84.4**

CPU2006 license: 97

Test date: Sep-2012

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-12800R-11, ECC)
 Disk Subsystem: 1 x 500 GB SATA, 7200 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	40.6	334	40.6	334	40.4	336	39.6	343	40.4	336	41.0	331
416.gamess	606	32.3	605	32.4	611	32.1	491	39.9	495	39.5	490	39.9
433.milc	165	55.7	165	55.8	166	55.4	166	55.3	166	55.2	164	55.9
434.zeusmp	59.0	154	59.2	154	59.2	154	59.0	154	59.2	154	59.2	154
435.gromacs	240	29.7	239	29.9	240	29.8	240	29.7	239	29.9	240	29.8
436.cactusADM	24.5	488	24.5	488	24.5	488	24.5	488	24.5	488	24.5	488
437.leslie3d	38.2	246	37.8	248	38.4	244	38.2	246	37.8	248	38.4	244
444.namd	310	25.9	310	25.9	310	25.8	305	26.3	305	26.3	305	26.3
447.dealII	210	54.6	209	54.7	210	54.4	210	54.6	209	54.7	210	54.4
450.soplex	191	43.7	191	43.7	194	43.0	191	43.7	191	43.7	194	43.0
453.povray	111	48.1	111	47.8	109	48.6	92.2	57.7	93.7	56.8	93.8	56.7
454.calculix	196	42.0	196	42.1	195	42.3	179	46.2	179	46.2	180	45.8
459.GemsFDTD	71.2	149	71.0	149	71.2	149	59.7	178	59.7	178	59.5	178
465.tonto	273	36.0	245	40.2	274	35.9	203	48.4	202	48.7	202	48.8
470.lbm	31.8	432	31.6	434	31.6	434	31.8	432	31.6	434	31.6	434
481.wrf	145	76.8	146	76.4	145	76.8	145	76.8	146	76.4	145	76.8
482.sphinx3	259	75.2	257	75.7	255	76.5	252	77.4	254	76.7	253	77.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS Settings:
 CPU Power and Performance Policy set to Performance
 Sysinfo program /usr/cpu2006/config/sysinfo.rev6800
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on localhost.localdomain Thu Sep 20 17:47:53 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = 89.4

Acer AW2000h-AW170h F2 (Intel Xeon E5-2690)

SPECfp_base2006 = 84.4

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Sep-2012

Hardware Availability: Sep-2012

Software Availability: Dec-2011

Platform Notes (Continued)

```

From /proc/cpuinfo
  model name : Intel(R) Xeon(R) CPU E5-2690 0 @ 2.90GHz
    2 "physical id"s (chips)
    32 "processors"
  cores, siblings (Caution: counting these is hw and system dependent. The
  following excerpts from /proc/cpuinfo might not be reliable. Use with
  caution.)
    cpu cores : 8
    siblings  : 16
    physical 0: cores 0 1 2 3 4 5 6 7
    physical 1: cores 0 1 2 3 4 5 6 7
  cache size : 20480 KB

From /proc/meminfo
MemTotal:      132105376 kB
HugePages_Total:      0
Hugepagesize:    2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
  Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
  EST 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Sep 20 17:45

SPEC is set to: /usr/cpu2006
  Filesystem      Type      Size  Used Avail Use% Mounted on
  /dev/mapper/VolGroup-lv_root
                  ext4      394G   71G  304G  19% /

Additional information from dmidecode:
Memory:
  8x Hynix HMT42GR7MFR4C-PB 16 GB 1600 MHz 2 rank

(End of data from sysinfo program)

```

General Notes

Environment variables set by runspec before the start of the run:

```

KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64"
OMP_NUM_THREADS = "16"

```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = 89.4

Acer AW2000h-AW170h F2 (Intel Xeon E5-2690)

SPECfp_base2006 = 84.4

CPU2006 license: 97

Test date: Sep-2012

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

General Notes (Continued)

memory using RHEL5.5
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = 89.4

Acer AW2000h-AW170h F2 (Intel Xeon E5-2690)

SPECfp_base2006 = 84.4

CPU2006 license: 97

Test date: Sep-2012

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

Base Optimization Flags (Continued)

C++ benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias`

Fortran benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch`

Benchmarks using both Fortran and C:

`-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch
-ansi-alias`

Peak Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: `-xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-ansi-alias`

470.lbm: `basepeak = yes`

482.sphinx3: `-xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel`

C++ benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = 89.4

Acer AW2000h-AW170h F2 (Intel Xeon E5-2690)

SPECfp_base2006 = 84.4

CPU2006 license: 97

Test date: Sep-2012

Test sponsor: Acer Incorporated

Hardware Availability: Sep-2012

Tested by: Acer Incorporated

Software Availability: Dec-2011

Peak Optimization Flags (Continued)

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>

<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.2-aw170hf2-revA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>

<http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.2-aw170hf2-revA.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

SPECfp2006 = 89.4

Acer AW2000h-AW170h F2 (Intel Xeon E5-2690)

SPECfp_base2006 = 84.4

CPU2006 license: 97

Test sponsor: Acer Incorporated

Tested by: Acer Incorporated

Test date: Sep-2012

Hardware Availability: Sep-2012

Software Availability: Dec-2011

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 12:53:29 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 October 2012.