SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MP225 (Intel Xeon E5-2630L)

SPECfp®_rate2006 = 315

SPECfp_rate_base2006 = 308

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Sep-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

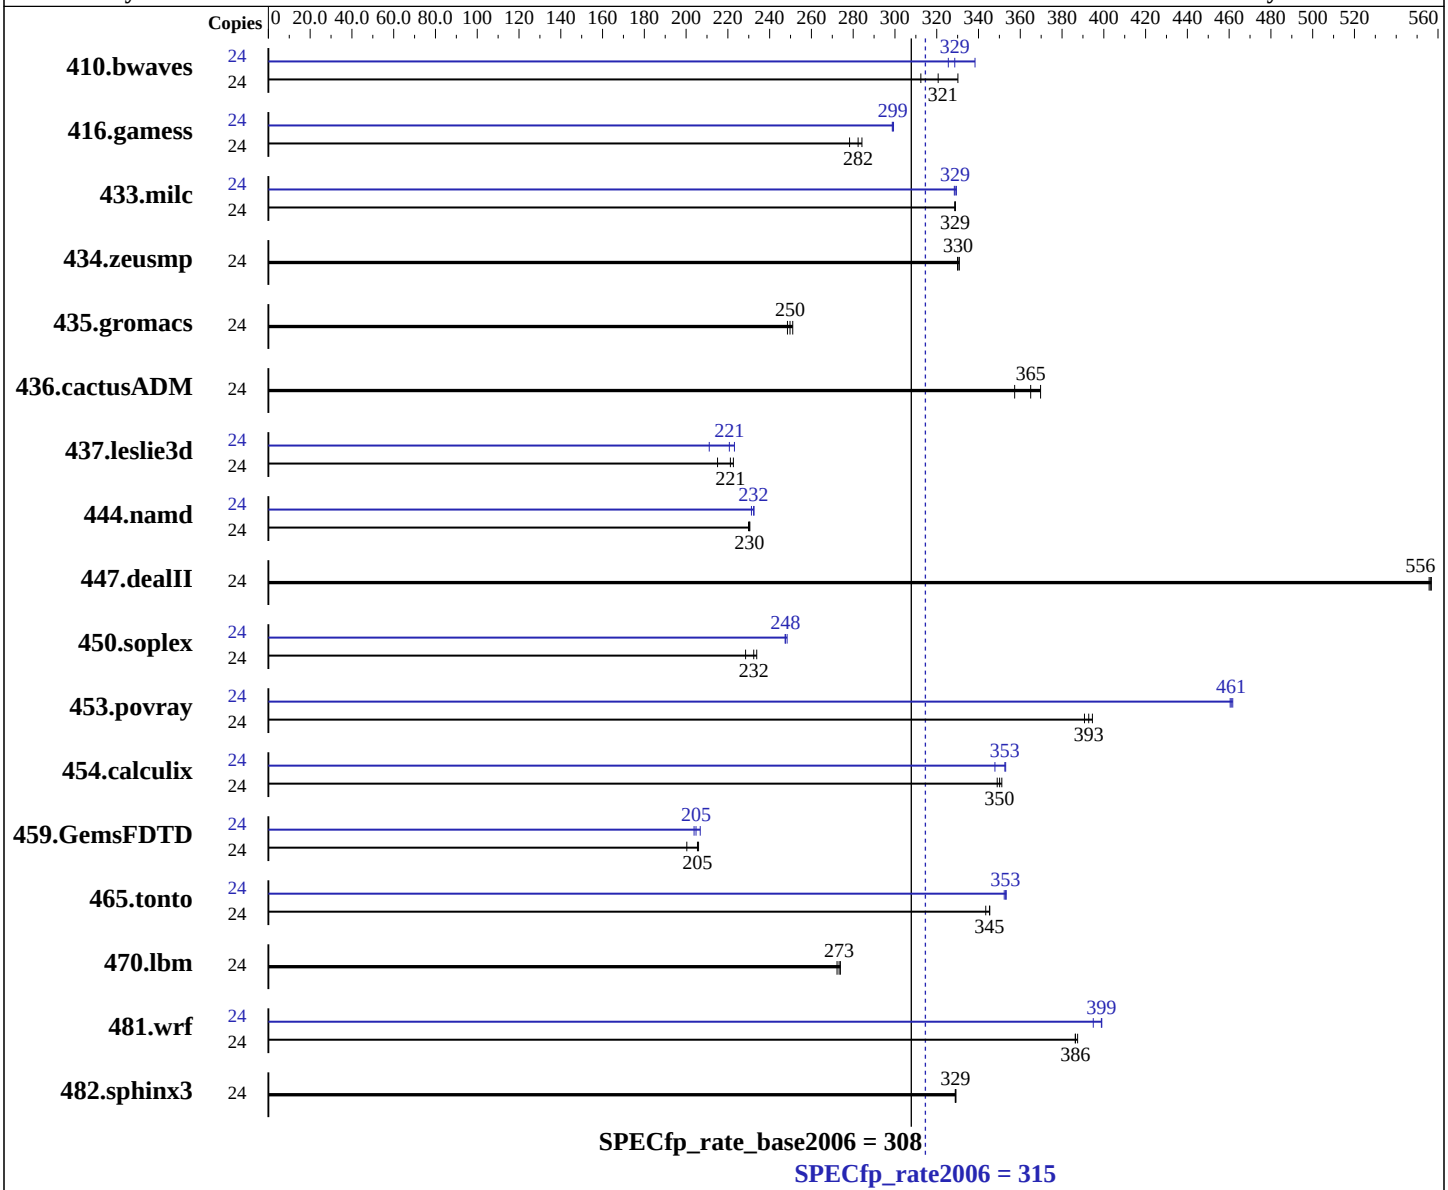

Hardware

CPU Name:	Intel Xeon E5-2630L
CPU Characteristics:	Intel Turbo Boost Technology up to 2.50 GHz
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server Release 6.2, 2.6.32-279.el6.x86_64
Compiler:	C/C++/Fortran: Version 12.1.0 of Intel Compiler XE Build 20111011
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MP225 (Intel Xeon E5-2630L)

SPECfp_rate2006 = 315

SPECfp_rate_base2006 = 308

CPU2006 license: 9001
Test sponsor: Itautec
Tested by: Itautec

Test date: Sep-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

L3 Cache: 15 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8 x 4 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem: 2 x 146 GB, SAS, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	988	330	**1017**	**321**	1044	312	24	**992**	**329**	964	338	1002	326
416.gamess	24	**1664**	**282**	1654	284	1689	278	24	1570	299	**1572**	**299**	1573	299
433.milc	24	670	329	670	329	**670**	**329**	24	669	329	**670**	**329**	671	328
434.zeusmp	24	662	330	**661**	**330**	660	331	24	662	330	**661**	**330**	660	331
435.gromacs	24	689	249	**686**	**250**	683	251	24	689	249	**686**	**250**	683	251
436.cactusADM	24	**786**	**365**	803	357	776	370	24	**786**	**365**	803	357	776	370
437.leslie3d	24	1049	215	1013	223	**1020**	**221**	24	1069	211	1011	223	**1022**	**221**
444.namd	24	837	230	**835**	**230**	835	230	24	832	231	**828**	**232**	828	233
447.dealII	24	494	556	**494**	**556**	493	557	24	494	556	**494**	**556**	493	557
450.soplex	24	876	228	856	234	**861**	**232**	24	806	248	**809**	**248**	809	247
453.povray	24	327	391	324	395	**325**	**393**	24	277	462	**277**	**461**	277	460
454.calculix	24	564	351	567	349	**566**	**350**	24	561	353	569	348	**562**	**353**
459.GemsFDTD	24	1271	200	**1239**	**205**	1236	206	24	1232	207	**1244**	**205**	1249	204
465.tonto	24	**684**	**345**	688	343	684	345	24	**669**	**353**	670	352	668	353
470.lbm	24	1211	272	**1207**	**273**	1204	274	24	1211	272	**1207**	**273**	1204	274
481.wrf	24	694	386	692	387	**694**	**386**	24	672	399	679	395	**672**	**399**
482.sphinx3	24	**1422**	**329**	1421	329	1422	329	24	**1422**	**329**	1421	329	1422	329

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
 numactl was used to bind copies to the cores
```

Operating System Notes

```
'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
Large pages were not enabled for this run
```

Platform Notes

```
Sysinfo program /home/rcaneca/cpu2006/Docs/sysinfo
$Rev: 6775 $ $Date:: 2011-08-16 #$ 8787f7622badcf24e01c368b1db4377c
running on mp225 Sat Sep 22 19:07:05 2012
```

Continued on next page

Platform Notes (Continued)

```
This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2630L 0 @ 2.00GHz
      2 "physical id"s (chips)
      24 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 6
      siblings  : 12
      physical 0: cores 0 1 2 3 4 5
      physical 1: cores 0 1 2 3 4 5
   cache size : 15360 KB

From /proc/meminfo
   MemTotal:       32850356 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.3 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux mp225 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012 x86_64
   x86_64 x86_64 GNU/Linux

run-level 3 Sep 22 03:57

SPEC is set to: /home/rcaneca/cpu2006
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/mapper/vg_mp225-lv_home
                  ext4     67G  2.1G   62G   4% /home

(End of data from sysinfo program)
```

Base Compiler Invocation

C benchmarks:

```
icc   -m64
```

Continued on next page

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks (except as noted below):
icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

Continued on next page

Peak Optimization Flags (Continued)

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Fortran benchmarks:

410.bwaves: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-mem-layout-trans=3 -B /usr/share/libhugetlbfs/ -Wl,-melf_x86_64 -Wl,-hugetlbfs-link=BDT

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-mem-layout-trans=3

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.html
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Itautec-Servidor_Itautec-Intel-Linux-Platform.xml
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 12:45:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 October 2012.