



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp®\_rate2006 = 185

Compute Blade 520H (Intel Xeon E5-2637)

SPECfp\_rate\_base2006 = 179

CPU2006 license: 35


Test sponsor: HITACHI

Tested by: HITACHI

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Feb-2012

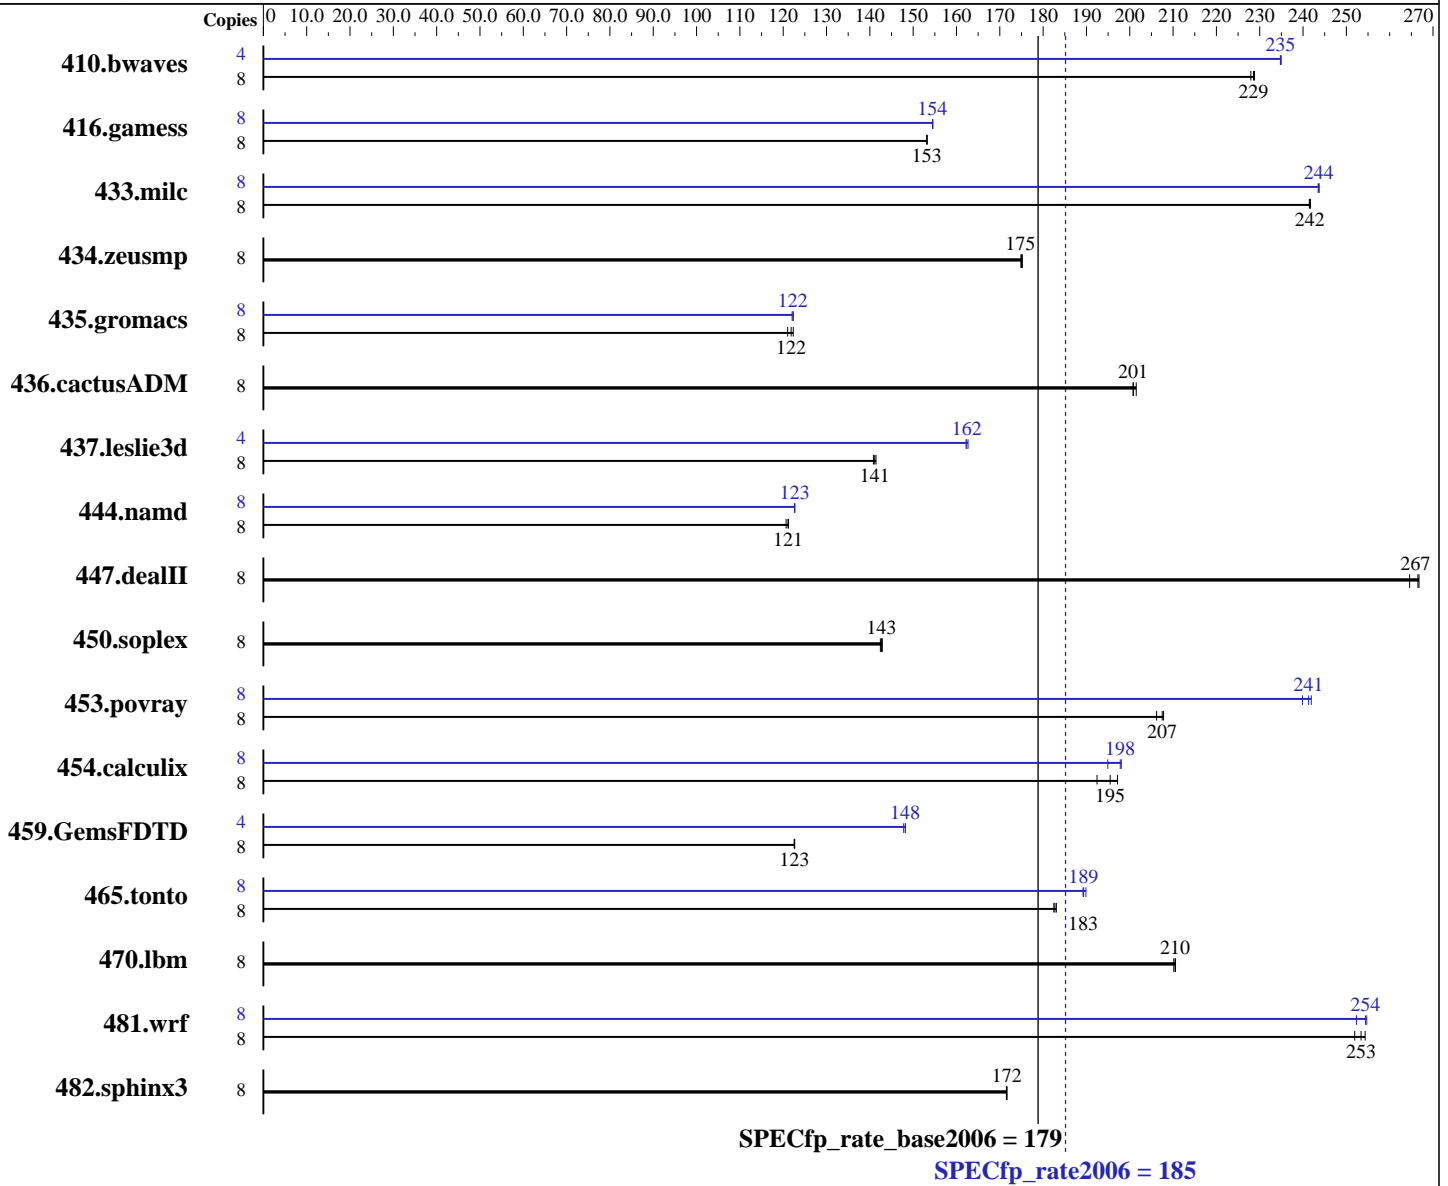

### Hardware

CPU Name: Intel Xeon E5-2637  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1, 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.4.2.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp\_rate2006 = 185

Compute Blade 520H (Intel Xeon E5-2637)

SPECfp\_rate\_base2006 = 179

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Feb-2012

L3 Cache: 5 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	477	228	475	229	<b>476</b>	<b>229</b>	4	231	235	<u>232</u>	<u>235</u>	232	235
416.gamess	8	1022	153	<b>1023</b>	<b>153</b>	1023	153	8	1013	155	<u>1014</u>	<u>154</u>	1014	154
433.milc	8	304	241	<b>304</b>	<b>242</b>	304	242	8	302	243	<u>301</u>	<u>244</u>	301	244
434.zeusmp	8	416	175	416	175	<b>416</b>	<b>175</b>	8	416	175	416	175	<b>416</b>	<b>175</b>
435.gromacs	8	472	121	<b>469</b>	<b>122</b>	467	122	8	467	122	<b>467</b>	<b>122</b>	468	122
436.cactusADM	8	<b>476</b>	<b>201</b>	476	201	474	201	8	<b>476</b>	<b>201</b>	476	201	474	201
437.leslie3d	8	532	141	<b>533</b>	<b>141</b>	534	141	4	232	162	231	163	<b>232</b>	<b>162</b>
444.namd	8	529	121	<b>530</b>	<b>121</b>	532	121	8	<b>523</b>	<b>123</b>	523	123	523	123
447.dealII	8	346	265	<b>343</b>	<b>267</b>	343	267	8	346	265	<b>343</b>	<b>267</b>	343	267
450.soplex	8	468	142	467	143	<b>468</b>	<b>143</b>	8	468	142	467	143	<b>468</b>	<b>143</b>
453.povray	8	206	206	<b>205</b>	<b>207</b>	205	208	8	177	240	<b>176</b>	<b>241</b>	176	242
454.calculix	8	<b>338</b>	<b>195</b>	343	192	335	197	8	339	195	333	198	<b>334</b>	<b>198</b>
459.GemsFDTD	8	<b>692</b>	<b>123</b>	693	123	692	123	4	<b>286</b>	<b>148</b>	287	148	286	148
465.tonto	8	430	183	<b>431</b>	<b>183</b>	431	182	8	415	190	<b>416</b>	<b>189</b>	416	189
470.lbm	8	522	211	<b>522</b>	<b>210</b>	523	210	8	522	211	<b>522</b>	<b>210</b>	523	210
481.wrf	8	351	254	<b>353</b>	<b>253</b>	355	252	8	354	252	<b>351</b>	<b>254</b>	351	255
482.sphinx3	8	909	172	908	172	<b>908</b>	<b>172</b>	8	909	172	908	172	<b>908</b>	<b>172</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Sysinfo program /home/cpu2006/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Mon Oct 22 21:36:30 2012

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

**SPECfp\_rate2006 = 185**

Compute Blade 520H (Intel Xeon E5-2637)

**SPECfp\_rate\_base2006 = 179**

**CPU2006 license:** 35

**Test sponsor:** HITACHI

**Tested by:** HITACHI

**Test date:** Oct-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Feb-2012

## Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name      : Intel(R) Xeon(R) CPU E5-2637 0 @ 3.00GHz
 2 "physical id"s (chips)
 8 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores      : 2
siblings       : 4
physical 0:    : cores 0 1
physical 1:    : cores 0 1
cache size     : 5120 KB
```

From /proc/meminfo

```
MemTotal:      132136072 kB
HugePages_Total: 0
Hugepagesize:   2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-220.4.2.el6.x86_64 #1 SMP Mon Feb 6
16:39:28 EST 2012 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 22 18:46

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp\_rate2006 = 185

Compute Blade 520H (Intel Xeon E5-2637)

SPECfp\_rate\_base2006 = 179

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Feb-2012

### General Notes (Continued)

numactl --interleave=all runspec <etc>

HITACHI BladeSymphony BS520H and HITACHI Compute Blade 520H are electronically equivalent. The results have been measured on a HITACHI BladeSymphony BS520H.

### Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

### Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

### Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp\_rate2006 = 185

Compute Blade 520H (Intel Xeon E5-2637)

SPECfp\_rate\_base2006 = 179

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Feb-2012

## Base Optimization Flags (Continued)

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## HITACHI

SPECfp\_rate2006 = 185

Compute Blade 520H (Intel Xeon E5-2637)

SPECfp\_rate\_base2006 = 179

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Oct-2012

Hardware Availability: Nov-2012

Software Availability: Feb-2012

## Peak Optimization Flags

### C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

### C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

### Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-static -auto-ilp32 -opt-mem-layout-trans=3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**HITACHI**

**SPECfp\_rate2006 = 185**

**Compute Blade 520H (Intel Xeon E5-2637)**

**SPECfp\_rate\_base2006 = 179**

**CPU2006 license:** 35

**Test sponsor:** HITACHI

**Tested by:** HITACHI

**Test date:** Oct-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Feb-2012

## Peak Optimization Flags (Continued)

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32  
-opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120829.html>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120829.xml>

<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 14:02:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 November 2012.