



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3250 M4  
(Intel Pentium G2100T, 2.60 GHz)

SPECfp®\_rate2006 = 66.0

SPECfp\_rate\_base2006 = 64.6

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2012

Hardware Availability: Sep-2012

Software Availability: Dec-2011

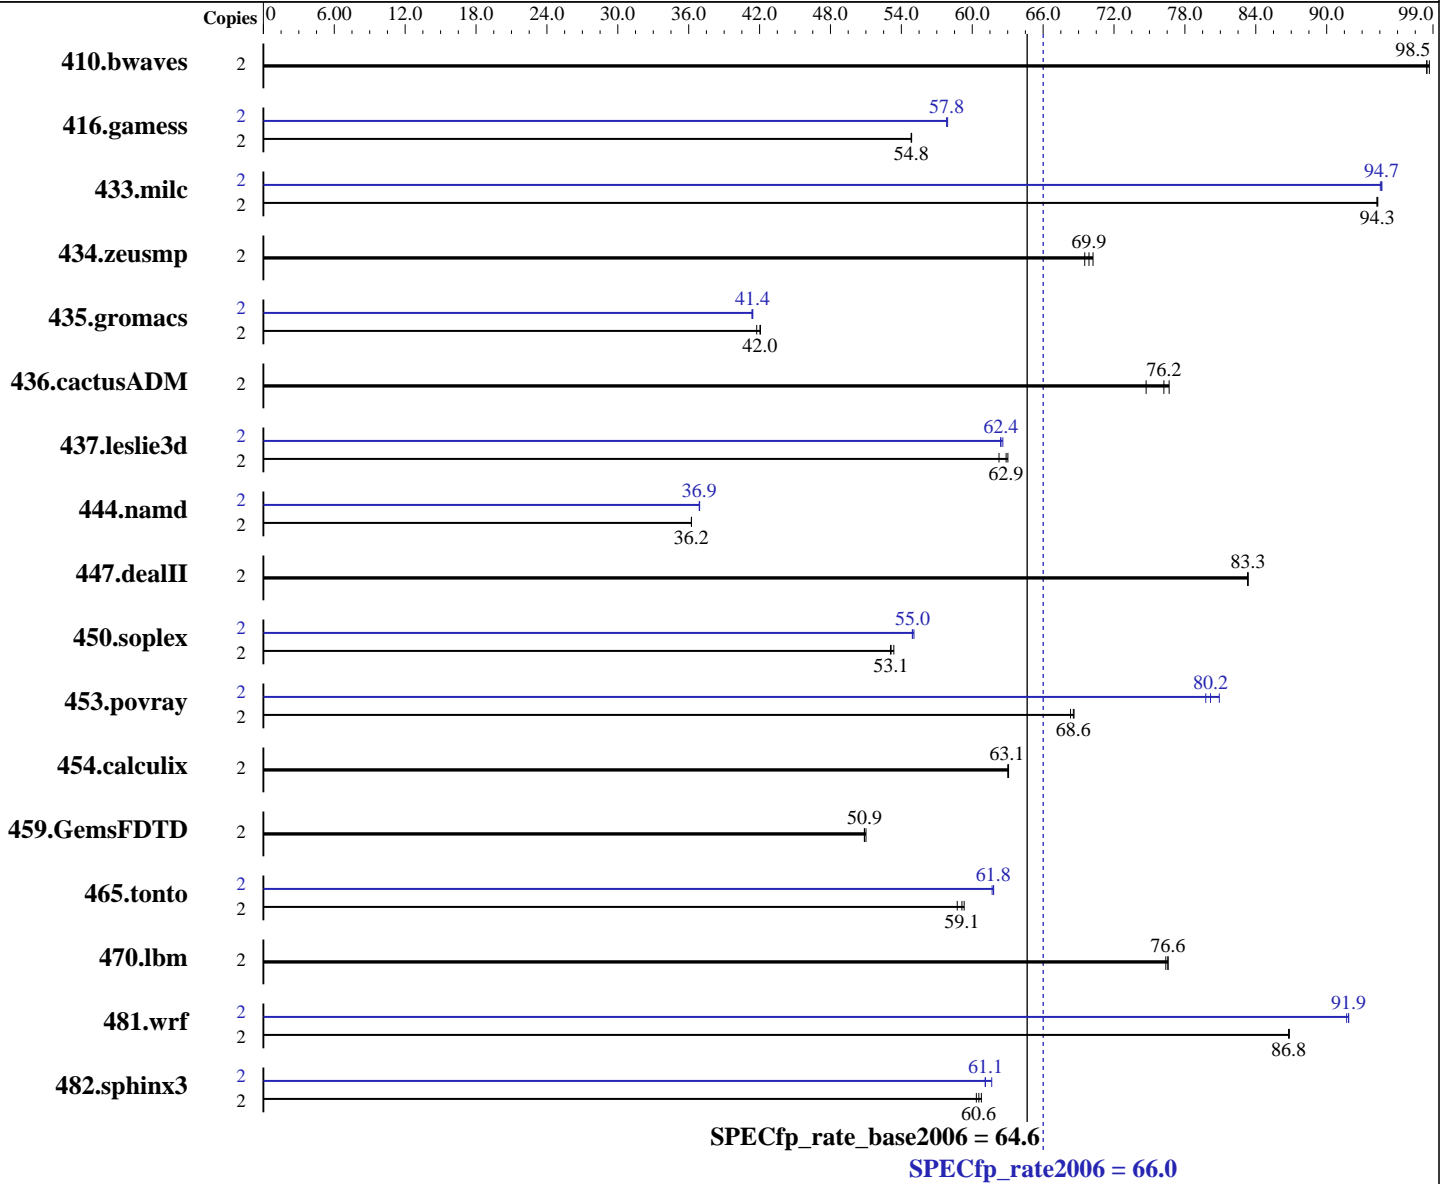

### Hardware

CPU Name: Intel Pentium G2100T  
 CPU Characteristics:  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
 2.6.32-220.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

IBM System x3250 M4  
(Intel Pentium G2100T, 2.60 GHz)

SPECfp\_rate2006 = 66.0

SPECfp\_rate\_base2006 = 64.6

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Oct-2012

Hardware Availability: Sep-2012

Software Availability: Dec-2011

L3 Cache: 3 MB I+D on chip per chip  
Other Cache: None  
Memory: 16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)  
Disk Subsystem: 1 x 146 GB SAS, 15000 RPM  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	2	275	98.7	276	98.5	<b><u>276</u></b>	<b><u>98.5</u></b>	2	275	98.7	276	98.5	<b><u>276</u></b>	<b><u>98.5</u></b>
416.gamess	2	714	54.8	714	54.9	<b><u>714</u></b>	<b><u>54.8</u></b>	2	<b><u>677</u></b>	<b><u>57.8</u></b>	677	57.8	676	57.9
433.milc	2	195	94.3	195	94.3	<b><u>195</u></b>	<b><u>94.3</u></b>	2	194	94.5	<b><u>194</u></b>	<b><u>94.7</u></b>	194	94.7
434.zeusmp	2	<b><u>260</u></b>	<b><u>69.9</u></b>	259	70.2	262	69.5	2	<b><u>260</u></b>	<b><u>69.9</u></b>	259	70.2	262	69.5
435.gromacs	2	339	42.1	<b><u>340</u></b>	<b><u>42.0</u></b>	342	41.8	2	<b><u>345</u></b>	<b><u>41.4</u></b>	345	41.4	345	41.4
436.cactusADM	2	312	76.7	<b><u>314</u></b>	<b><u>76.2</u></b>	320	74.7	2	312	76.7	<b><u>314</u></b>	<b><u>76.2</u></b>	320	74.7
437.leslie3d	2	302	62.3	298	63.0	<b><u>299</u></b>	<b><u>62.9</u></b>	2	300	62.6	301	62.4	<b><u>301</u></b>	<b><u>62.4</u></b>
444.namd	2	443	36.2	<b><u>443</u></b>	<b><u>36.2</u></b>	443	36.2	2	434	36.9	<b><u>435</u></b>	<b><u>36.9</u></b>	435	36.9
447.dealII	2	275	83.4	<b><u>275</u></b>	<b><u>83.3</u></b>	275	83.3	2	275	83.4	<b><u>275</u></b>	<b><u>83.3</u></b>	275	83.3
450.soplex	2	<b><u>314</u></b>	<b><u>53.1</u></b>	314	53.1	313	53.4	2	303	55.1	304	54.9	<b><u>304</u></b>	<b><u>55.0</u></b>
453.povray	2	<b><u>155</u></b>	<b><u>68.6</u></b>	155	68.6	156	68.3	2	133	79.8	132	80.9	<b><u>133</u></b>	<b><u>80.2</u></b>
454.calculix	2	262	63.1	262	63.0	<b><u>262</u></b>	<b><u>63.1</u></b>	2	262	63.1	262	63.0	<b><u>262</u></b>	<b><u>63.1</u></b>
459.GemsFDTD	2	416	51.0	417	50.9	<b><u>417</u></b>	<b><u>50.9</u></b>	2	416	51.0	417	50.9	<b><u>417</u></b>	<b><u>50.9</u></b>
465.tonto	2	332	59.3	<b><u>333</u></b>	<b><u>59.1</u></b>	335	58.7	2	318	61.8	<b><u>318</u></b>	<b><u>61.8</u></b>	319	61.7
470.lbm	2	360	76.4	<b><u>359</u></b>	<b><u>76.6</u></b>	359	76.6	2	360	76.4	<b><u>359</u></b>	<b><u>76.6</u></b>	359	76.6
481.wrf	2	257	86.8	<b><u>257</u></b>	<b><u>86.8</u></b>	257	86.8	2	244	91.7	<b><u>243</u></b>	<b><u>91.9</u></b>	243	91.9
482.sphinx3	2	641	60.8	646	60.3	<b><u>644</u></b>	<b><u>60.6</u></b>	2	<b><u>638</u></b>	<b><u>61.1</u></b>	632	61.6	638	61.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Turbo Mode enabled in BIOS  
C-State enabled in BIOS

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3250 M4  
(Intel Pentium G2100T, 2.60 GHz)

**SPECfp\_rate2006 = 66.0**

**SPECfp\_rate\_base2006 = 64.6**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Oct-2012

**Hardware Availability:** Sep-2012

**Software Availability:** Dec-2011

## Platform Notes (Continued)

Sysinfo program /root/SPECcpul.2/config/sysinfo.rev6800  
\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3  
running on localhost.localdomain Wed Oct 31 23:06:44 2012

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```
model name : Intel(R) Pentium(R) CPU G2100T @ 2.60GHz
 1 "physical id"s (chips)
 2 "processors"
```

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

```
cpu cores : 2
siblings   : 2
physical 0: cores 0 1
cache size : 3072 KB
```

From /proc/meminfo

```
MemTotal:      16322724 kB
HugePages_Total:    0
Hugepagesize:    2048 kB
```

/usr/bin/lsb\_release -d

```
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

From /etc/\*release\* /etc/\*version\*

```
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

uname -a:

```
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 31 15:15

SPEC is set to: /root/SPECcpul.2

```
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
    ext4        50G   14G   34G   30% /
```

Additional information from dmidecode:

```
Memory:
 2x Micron 18JSF1G72AZ-1G6D1 8 GB 1600 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3250 M4  
(Intel Pentium G2100T, 2.60 GHz)

**SPECfp\_rate2006 = 66.0**

**SPECfp\_rate\_base2006 = 64.6**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Oct-2012  
**Hardware Availability:** Sep-2012  
**Software Availability:** Dec-2011

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/root/SPECcpul.2/libs/32:/root/SPECcpul.2/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1> /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.deallI: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3250 M4  
(Intel Pentium G2100T, 2.60 GHz)

**SPECfp\_rate2006 = 66.0**

**SPECfp\_rate\_base2006 = 64.6**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Oct-2012

**Hardware Availability:** Sep-2012

**Software Availability:** Dec-2011

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.deallI: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3250 M4  
(Intel Pentium G2100T, 2.60 GHz)

**SPECfp\_rate2006 = 66.0**

**SPECfp\_rate\_base2006 = 64.6**

**CPU2006 license:** 11

**Test sponsor:** IBM Corporation

**Tested by:** IBM Corporation

**Test date:** Oct-2012

**Hardware Availability:** Sep-2012

**Software Availability:** Dec-2011

## Peak Portability Flags (Continued)

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -static -auto-ilp32

470.lbm: basepeak = yes

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -opt-mem-layout-trans=3  
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -fno-alias -auto-ilp32

447.dealIII: basepeak = yes

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

IBM System x3250 M4  
(Intel Pentium G2100T, 2.60 GHz)

**SPECfp\_rate2006 = 66.0**

**SPECfp\_rate\_base2006 = 64.6**

**CPU2006 license:** 11  
**Test sponsor:** IBM Corporation  
**Tested by:** IBM Corporation

**Test date:** Oct-2012  
**Hardware Availability:** Sep-2012  
**Software Availability:** Dec-2011

## Peak Optimization Flags (Continued)

459.GemsFDTD: basepeak = yes

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.html>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20111122.xml>  
<http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 13:24:18 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 December 2012.