SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant SL230s Gen8
(2.60 GHz, Intel Xeon E5-2670)

SPECfp®_rate2006 = 481

SPECfp_rate_base2006 = 467

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

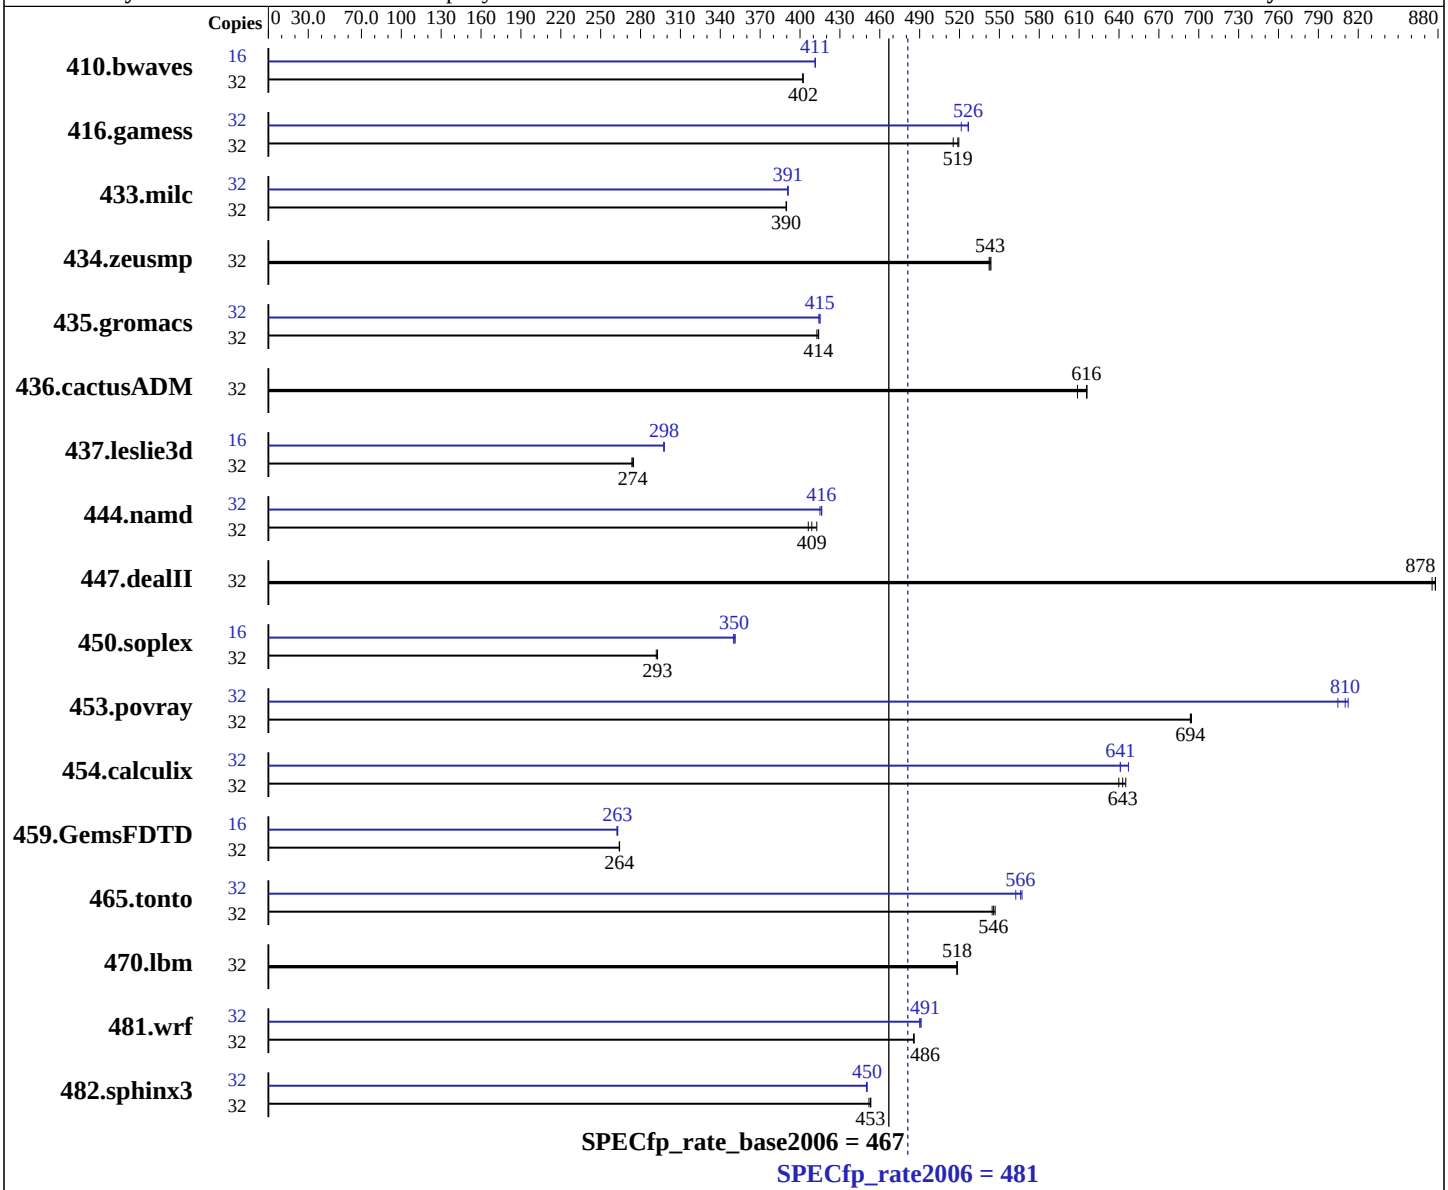

Hardware

CPU Name:	Intel Xeon E5-2670
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux; Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant SL230s Gen8
(2.60 GHz, Intel Xeon E5-2670)

SPECfp_rate2006 = 481

SPECfp_rate_base2006 = 467

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: May-2012
Hardware Availability: Jun-2012
Software Availability: Dec-2011

L3 Cache: 20 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 500 GB 7.2 K SAS
Other Hardware: None

Base Pointers: 32/64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1081	402	**1081**	**402**	1081	402	16	**528**	**411**	528	412	529	411
416.gamess	32	1216	515	**1208**	**519**	1206	519	32	1189	527	1202	521	**1190**	**526**
433.milc	32	753	390	**754**	**390**	754	390	32	752	391	751	391	**751**	**391**
434.zeusmp	32	**536**	**543**	536	544	537	542	32	**536**	**543**	536	544	537	542
435.gromacs	32	**552**	**414**	552	414	554	413	32	**551**	**415**	552	414	551	415
436.cactusADM	32	628	609	621	616	**621**	**616**	32	628	609	621	616	**621**	**616**
437.leslie3d	32	**1097**	**274**	1095	275	1100	273	16	**505**	**298**	505	298	506	297
444.namd	32	622	413	**628**	**409**	632	406	32	618	415	616	416	**617**	**416**
447.dealII	32	**417**	**878**	418	876	417	878	32	**417**	**878**	418	876	417	878
450.soplex	32	911	293	**912**	**293**	914	292	16	381	350	380	351	**381**	**350**
453.povray	32	245	695	245	694	**245**	**694**	32	210	812	212	805	**210**	**810**
454.calculix	32	409	645	**411**	**643**	413	640	32	412	641	408	647	**412**	**641**
459.GemsFDTD	32	1285	264	1286	264	**1285**	**264**	16	**646**	**263**	646	263	647	262
465.tonto	32	576	547	578	545	**577**	**546**	32	555	567	560	562	**556**	**566**
470.lbm	32	849	518	848	518	**849**	**518**	32	849	518	848	518	**849**	**518**
481.wrf	32	736	486	**736**	**486**	736	485	32	**728**	**491**	728	491	729	490
482.sphinx3	32	1380	452	1376	453	**1377**	**453**	32	**1385**	**450**	1386	450	1385	450

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1 >       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --localalloc runspec <etc>
```

Platform Notes

```
BIOS configuration:
 HP Power Profile set to Maximum Performance
 Thermal Configuration set to Maximum Cooling
 Energy/Performance Bias set to Max Performance

Sysinfo program /cpu2006/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on sl230bid Fri May  4 04:57:34 2012

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2670 0 @ 2.60GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 16
      physical 0: cores 0 1 2 3 4 5 6 7
      physical 1: cores 0 1 2 3 4 5 6 7
   cache size : 20480 KB

From /proc/meminfo
   MemTotal:       132129200 kB
   HugePages_Total:       0
   Hugepagesize:       2048 kB

/usr/bin/lsb_release -d
   Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
   redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
   system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
   Linux sl230bid 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
   x86_64 x86_64 x86_64 GNU/Linux

run-level 3 May 3 17:08

SPEC is set to: /cpu2006
   Filesystem     Type    Size  Used Avail Use% Mounted on
   /dev/sda3      ext4    457G   40G  394G  10% /

Additional information from dmidecode:
  BIOS HP P75 03/16/2012
  Memory:
```

Continued on next page

Platform Notes (Continued)

```
      16x Not Specified Not Specified 8 GB 1600 MHz 2 rank

   (End of data from sysinfo program)
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,compact,1,0"
LD_LIBRARY_PATH = "/cpu2006/libs2/32:/cpu2006/libs2/64"

 Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
 memory using RHEL5.5
```

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

C++ benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Fortran benchmarks:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch`

Benchmarks using both Fortran and C:
`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32 -ansi-alias -opt-mem-layout-trans=3`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

482.sphinx3: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m64`

450.soplex: `icpc -m32`

Fortran benchmarks:
`ifort -m64`

Benchmarks using both Fortran and C:
`icc -m64 ifort -m64`

Peak Portability Flags

410.bwaves: `-DSPEC_CPU_LP64`
416.gamess: `-DSPEC_CPU_LP64`
433.milc: `-DSPEC_CPU_LP64`
434.zeusmp: `-DSPEC_CPU_LP64`
435.gromacs: `-DSPEC_CPU_LP64 -nofor_main`
436.cactusADM: `-DSPEC_CPU_LP64 -nofor_main`
437.leslie3d: `-DSPEC_CPU_LP64`
444.namd: `-DSPEC_CPU_LP64`
447.dealII: `-DSPEC_CPU_LP64`
453.povray: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

454.calculix: -DSPEC_CPU_LP64 -nofor_main
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32 -opt-mem-layout-trans=3

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias -auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

Continued on next page

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto -inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -static -auto-ilp32 -opt-mem-layout-trans=3

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32 -opt-mem-layout-trans=3

481.wrf: Same as 454.calculix

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120425.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 13:26:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 December 2012.