SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B420 M3 (Intel Xeon E5-4603, 2.00 GHz)

SPECint®_rate2006 = 458

SPECint_rate_base2006 = 440

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Dec-2012
Hardware Availability: Sep-2012
Software Availability: Feb-2012

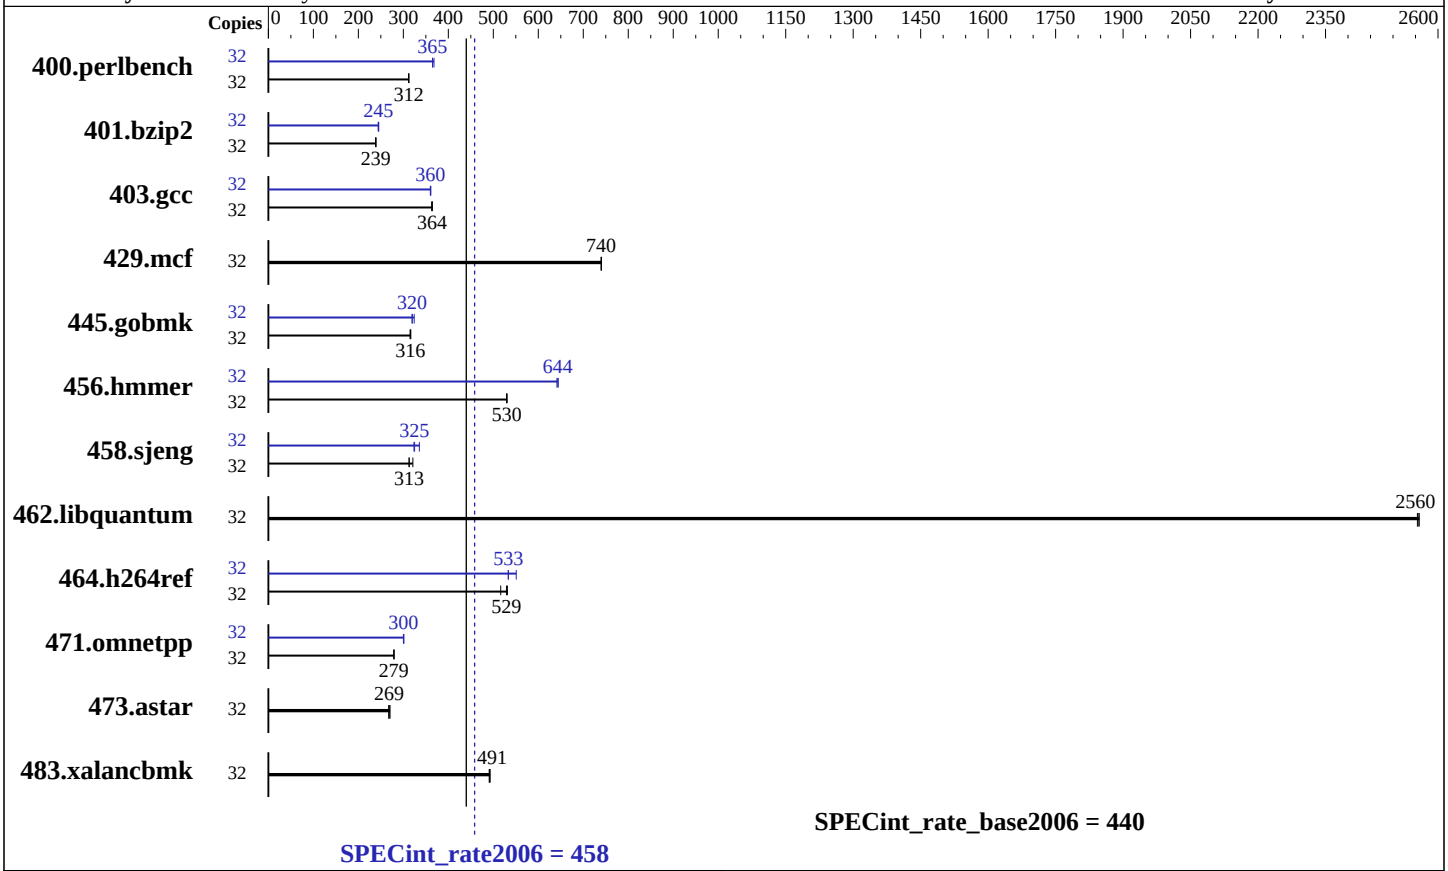

Hardware

CPU Name:	Intel Xeon E5-4603
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	16 cores, 4 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2,3,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	10 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1333 MHz and CL7)
Disk Subsystem:	1 X 300 GB 15000 RPM SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B420 M3 (Intel Xeon E5-4603, 2.00 GHz)

SPECint_rate2006 = 458

SPECint_rate_base2006 = 440

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Dec-2012
Hardware Availability: Sep-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	1001	312	**1002**	**312**	1003	312	32	849	368	**856**	**365**	857	365
401.bzip2	32	1291	239	1295	238	**1294**	**239**	32	1265	244	1258	245	**1261**	**245**
403.gcc	32	**707**	**364**	710	363	707	364	32	**715**	**360**	713	361	715	360
429.mcf	32	395	740	394	741	**394**	**740**	32	395	740	394	741	**394**	**740**
445.gobmk	32	**1061**	**316**	1061	316	1066	315	32	1051	319	**1049**	**320**	1036	324
456.hmmer	32	**564**	**530**	564	529	563	531	32	465	641	464	644	**464**	**644**
458.sjeng	32	1238	313	**1237**	**313**	1205	321	32	1196	324	1154	336	**1191**	**325**
462.libquantum	32	259	2560	**259**	**2560**	260	2550	32	259	2560	**259**	**2560**	260	2550
464.h264ref	32	1333	531	1371	516	**1338**	**529**	32	1285	551	1328	533	**1327**	**533**
471.omnetpp	32	**716**	**279**	716	279	717	279	32	664	301	**666**	**300**	666	300
473.astar	32	831	270	**836**	**269**	840	267	32	831	270	**836**	**269**	840	267
483.xalancbmk	32	448	493	450	491	**449**	**491**	32	448	493	450	491	**449**	**491**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Configuration:
Hyper-Threading set to Enabled
Processor C6 Report set to Disabled
Processor C1E set to Disabled
CPU Performance set to HPC
LV DDR Mode set to Performance-mode
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
 $Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on SPECCPU-M3 Sat Dec  1 23:41:19 2012

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-4603 0 @ 2.00GHz
       4 "physical id"s (chips)
```

Continued on next page

Platform Notes (Continued)

```
        32 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 4
        siblings  : 8
        physical 0: cores 0 1 2 3
        physical 1: cores 0 1 2 3
        physical 2: cores 0 1 2 3
        physical 3: cores 0 1 2 3
     cache size : 10240 KB

  From /proc/meminfo
     MemTotal:       264505740 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.2 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux SPECCPU-M3 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13 EST 2011
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Nov 29 14:27

  SPEC is set to: /opt/cpu2006-1.2
     Filesystem     Type    Size  Used Avail Use% Mounted on
     /dev/sda2      ext4    1.1T  7.7G  1.1T   1% /

  Additional information from dmidecode:
    Memory:
     32x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"

  Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL6.2
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
```

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 13:36:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 December 2012.