



# SPEC<sup>®</sup> CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2122TG-HTRF  
(H8DGT-HF , AMD Opteron 6366 HE)

SPECint<sup>®</sup>\_rate2006 = 448

SPECint\_rate\_base2006 = 395

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

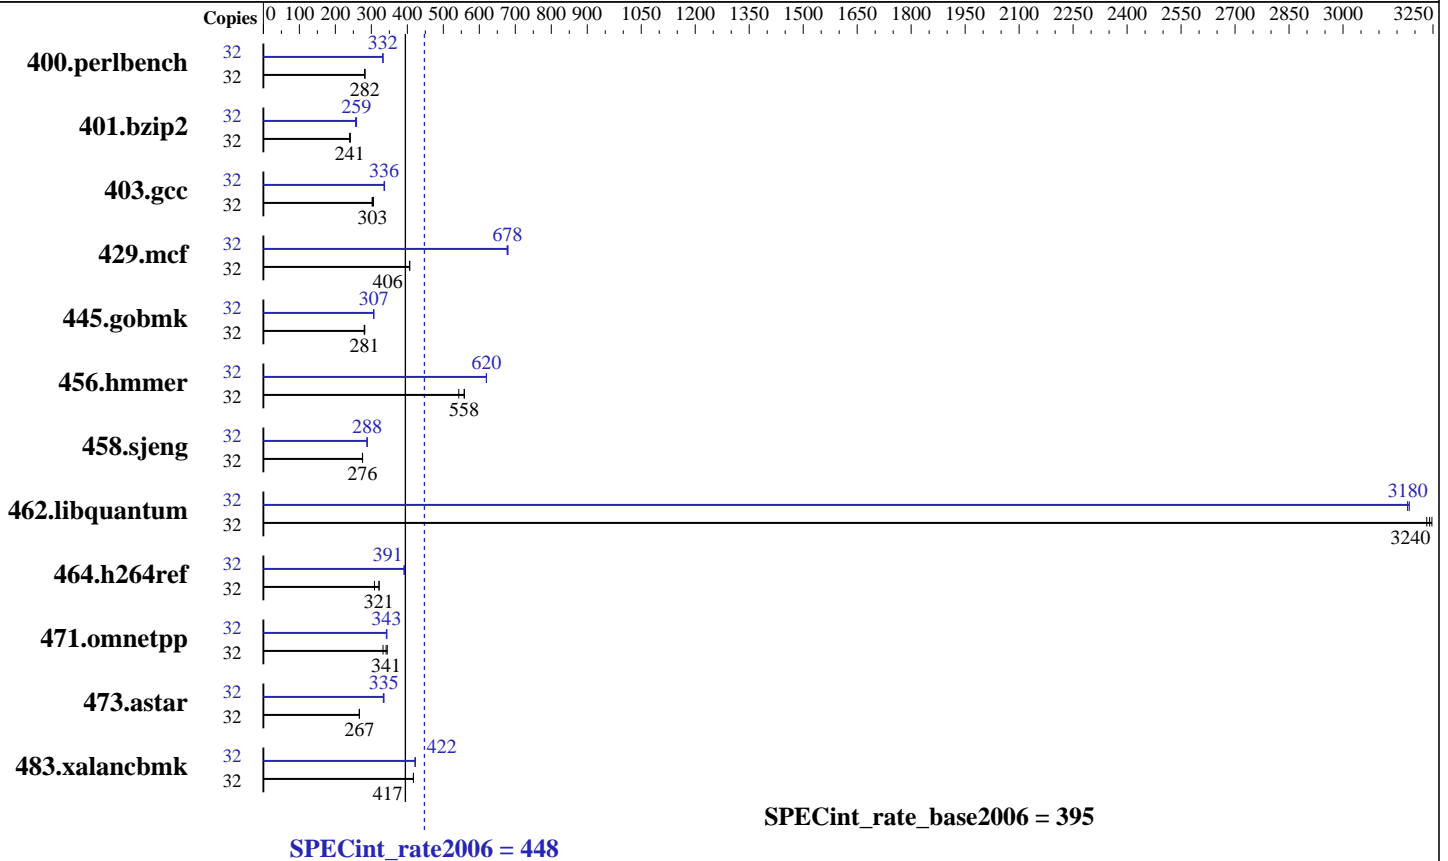

### Hardware

CPU Name: AMD Opteron 6366 HE  
 CPU Characteristics: AMD Turbo CORE technology up to 3.10 GHz  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 32 cores, 2 chips, 16 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 512 KB I on chip per chip,  
 64 KB I shared / 2 cores;  
 16 KB D on chip per core  
 Secondary Cache: 16 MB I+D on chip per chip, 2 MB shared / 2 cores  
 L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 8 cores  
 Other Cache: None  
 Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 1 x 1024 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3  
 Kernel 2.6.32-279.el6.x86\_64  
 Compiler: C/C++: Version 4.5.2 of x86 Open64 Compiler Suite  
 (from AMD)  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (Full multiuser with network)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 10.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2122TG-HTRF  
(H8DGT-HF , AMD Opteron 6366 HE)

SPECint\_rate2006 = 448

SPECint\_rate\_base2006 = 395

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	<b><u>1109</u></b>	<b><u>282</u></b>	1108	282	1111	281	32	941	332	942	332	<b><u>941</u></b>	<b><u>332</u></b>
401.bzip2	32	<b><u>1283</u></b>	<b><u>241</u></b>	1287	240	1278	242	32	1193	259	1206	256	<b><u>1194</u></b>	<b><u>259</u></b>
403.gcc	32	853	302	<b><u>850</u></b>	<b><u>303</u></b>	842	306	32	765	337	768	336	<b><u>767</u></b>	<b><u>336</u></b>
429.mcf	32	718	407	<b><u>718</u></b>	<b><u>406</u></b>	719	406	32	429	680	431	677	<b><u>430</u></b>	<b><u>678</u></b>
445.gobmk	32	<b><u>1195</u></b>	<b><u>281</u></b>	1191	282	1198	280	32	1095	307	1095	307	<b><u>1095</u></b>	<b><u>307</u></b>
456.hammer	32	<b><u>535</u></b>	<b><u>558</u></b>	550	543	535	558	32	482	620	482	619	<b><u>482</u></b>	<b><u>620</u></b>
458.sjeng	32	<b><u>1405</u></b>	<b><u>276</u></b>	1405	276	1407	275	32	1343	288	1344	288	<b><u>1343</u></b>	<b><u>288</u></b>
462.libquantum	32	204	3250	<b><u>205</u></b>	<b><u>3240</u></b>	205	3230	32	<b><u>209</u></b>	<b><u>3180</u></b>	208	3180	209	3180
464.h264ref	32	2201	322	2295	309	<b><u>2206</u></b>	<b><u>321</u></b>	32	1809	392	<b><u>1809</u></b>	<b><u>391</u></b>	1811	391
471.omnetpp	32	<b><u>587</u></b>	<b><u>341</u></b>	602	332	581	344	32	583	343	<b><u>584</u></b>	<b><u>343</u></b>	585	342
473.astar	32	842	267	842	267	<b><u>842</u></b>	<b><u>267</u></b>	32	<b><u>672</u></b>	<b><u>335</u></b>	674	333	671	335
483.xalancbmk	32	530	417	529	417	<b><u>529</u></b>	<b><u>417</u></b>	32	524	422	523	422	<b><u>523</u></b>	<b><u>422</u></b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
'numactl' was used to bind copies to the cores.  
See the configuration file for details.

## Operating System Notes

'ulimit -s unlimited' was used to set environment stack size  
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set transparent\_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr\_hugepages=28672 in /etc/sysctl.conf  
mount -t hugetlbfs nodev /mnt/hugepages

## General Notes

Environment variables set by runspec before the start of the run:

HUGETLB\_LIMIT = "896"

LD\_LIBRARY\_PATH = "/home/cpu2006/amd1206-rate-libs-revA/32:/home/cpu2006/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at  
<http://developer.amd.com/cpu/open64>

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2122TG-HTRF  
(H8DGT-HF , AMD Opteron 6366 HE)

SPECint\_rate2006 = 448

SPECint\_rate\_base2006 = 395

CPU2006 license: 001176  
Test sponsor: Supermicro  
Tested by: Supermicro

Test date: Sep-2012  
Hardware Availability: Nov-2012  
Software Availability: Aug-2012

## Base Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-Ofast -CG:local\_sched\_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000  
-IPA:small\_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2  
-march=bdver1

C++ benchmarks:  
-Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on -D\_\_OPEN64\_FAST\_SET  
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmarheap

## Peak Compiler Invocation

C benchmarks:  
opencc

C++ benchmarks:  
openCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2122TG-HTRF  
(H8DGT-HF , AMD Opteron 6366 HE)

SPECint\_rate2006 = 448

SPECint\_rate\_base2006 = 395

CPU2006 license: 001176

Test sponsor: Supermicro

Tested by: Supermicro

Test date: Sep-2012

Hardware Availability: Nov-2012

Software Availability: Aug-2012

## Peak Portability Flags (Continued)

401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000  
 -OPT:unroll\_times\_max=8 -OPT:unroll\_size=256  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -WOPT:if\_conv=0  
 -WOPT:sib=on -CG:local\_sched\_alg=1 -CG:unroll\_fb\_req=on  
 -CG:movext\_icmp=off -HP:bd=2m:heap=2m -march=bdver1  
 -GRA:aggr\_loop\_splitting=off -GRA:loop\_splitting=off

401.bzip2: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
 -LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint  
 -OPT:goto=off -CG:local\_sched\_alg=1 -HP:bd=2m:heap=2m  
 -march=bdver2

403.gcc: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -LNO:trip\_count=256 -CG:cmp\_peep=on -CG:pre\_minreg\_level=2  
 -m32 -HP:bd=2m:heap=2m -GRA:unspill=on -IPA:small\_pu=200  
 -WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll\_times\_max=5 -ipa -INLINE:aggressive=on  
 -CG:gcm=off -CG:dsched=on -GRA:prioritize\_by\_density=on  
 -m32 -HP:bd=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -OPT:unroll\_size=256 -OPT:unroll\_times\_max=8  
 -OPT:keep\_ext=on -IPA:plimit=750 -IPA:min\_hotness=300  
 -IPA:pu\_reorder=1 -LNO:ignore\_feedback=off -WOPT:if\_conv=2  
 -HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
 -LNO:prefetch=2 -OPT:alias=disjoint  
 -OPT:unroll\_times\_max=16 -OPT:unroll\_size=512  
 -OPT:unroll\_level=2 -OPT:keep\_ext=on -CG:cflow=0  
 -CG:cmp\_peep=on -CG:pre\_local\_sched=off -HP:bd=2m:heap=2m  
 -CG:p2align=0 -CG:load\_exe=3 -CG:dsched=on -march=bdver1

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2122TG-HTRF  
(H8DGT-HF , AMD Opteron 6366 HE)

**SPECint\_rate2006 = 448**

**SPECint\_rate\_base2006 = 395**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Sep-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Aug-2012

## Peak Optimization Flags (Continued)

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-CG:ptr\_load\_use=0 -CG:divrem\_opt=on -CG:movext\_icmp=off  
-CG:locs\_best=on -LNO:full\_unroll=10 -IPA:pu\_reorder=2  
-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1

462.libquantum: -Ofast -mso -OPT:unroll\_size=512 -OPT:unroll\_times\_max=16  
-LNO:prefetch=2 -LNO:prefetch\_ahead=4 -LNO:pf2=0  
-CG:local\_sched\_alg=1 -CG:p2align=0 -INLINE:aggressive=ON  
-IPA:plimit=15000 -IPA:small\_pu=100  
-HP:bdt=2m:heap=2m,limit=300 -march=bdver2

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:unroll\_size=256 -OPT:unroll\_times\_max=2  
-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr\_load\_use=0  
-CG:local\_sched\_alg=1 -HP:bdt=2m:heap=2m -march=bdver1

C++ benchmarks:

471.omnetpp: -Ofast -m32 -INLINE:aggressive=on -CG:cmp\_peep=on  
-WOPT:sib=on -D\_\_OPEN64\_FAST\_SET -march=bdver2 -mno-fma4  
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

473.astar: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-WOPT:if\_conv=0 -WOPT:sib=on -CG:divrem\_opt=on  
-CG:p2align=1 -CG:dsched=on -GRA:optimize\_boundary=on  
-OPT:alias=disjoint -INLINE:aggressive=on  
-IPA:small\_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m  
-march=bdver1

483.xalancbmk: -Ofast -LNO:prefetch=2 -OPT:unroll\_size=512  
-OPT:unroll\_times\_max=8 -D\_\_OPEN64\_FAST\_SET  
-INLINE:aggressive=on -m32 -CG:cmp\_peep=on  
-CG:local\_sched=off -CG:p2align=1 -GRA:unspill=on  
-TENV:frame\_pointer=off -fno-emit-exceptions -march=bdver2  
-mno-fma4  
-L/root/work/libraries/SmartHeap-10/lib -lsmarheap

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-I.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Supermicro

Supermicro A+ Server 2122TG-HTRF  
(H8DGT-HF , AMD Opteron 6366 HE)

**SPECint\_rate2006 = 448**

**SPECint\_rate\_base2006 = 395**

**CPU2006 license:** 001176

**Test sponsor:** Supermicro

**Tested by:** Supermicro

**Test date:** Sep-2012

**Hardware Availability:** Nov-2012

**Software Availability:** Aug-2012

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 14:20:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 January 2013.