SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R415 (AMD Opteron 4334, 3.10 GHz)

SPECint®_rate2006 = 249

SPECint_rate_base2006 = 223

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2012
Hardware Availability: Nov-2012
Software Availability: Aug-2012

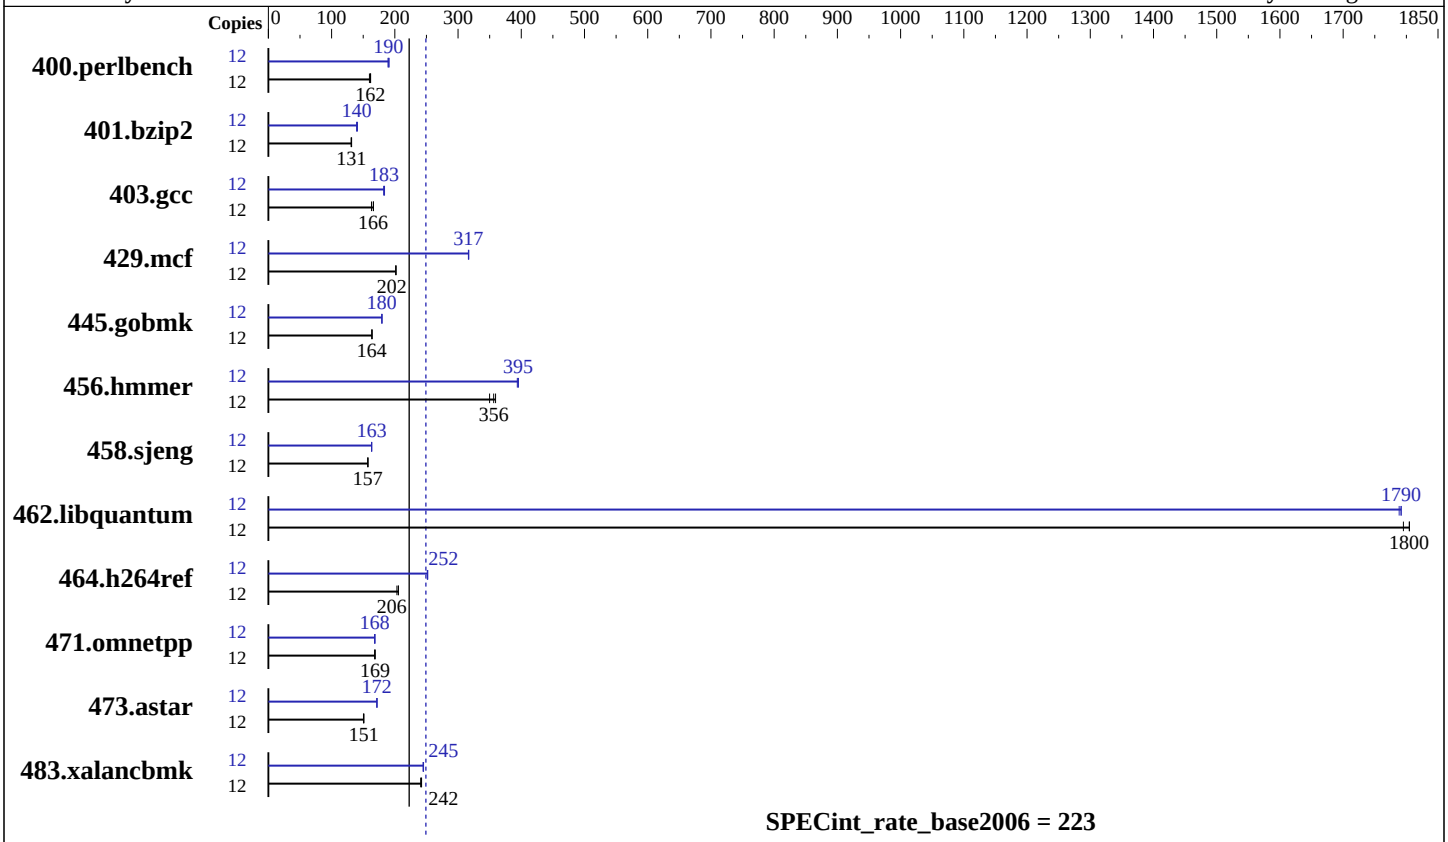

Hardware

CPU Name:	AMD Opteron 4334
CPU Characteristics:	AMD Turbo CORE technology up to 3.50 GHz
CPU MHz:	3100
FPU:	Integrated
CPU(s) enabled:	12 cores, 2 chips, 6 cores/chip
CPU(s) orderable:	1,2 chips
Primary Cache:	192 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	6 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	32 GB (4 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 1 TB 7200 RPM SATA
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2, Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 10.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R415 (AMD Opteron 4334, 3.10 GHz)

SPECint_rate2006 = 249

SPECint_rate_base2006 = 223

CPU2006 license: 55
Test sponsor: Dell Inc.
Tested by: Dell Inc.

Test date: Nov-2012
Hardware Availability: Nov-2012
Software Availability: Aug-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	12	725	162	**726**	**162**	734	160	12	**616**	**190**	620	189	614	191
401.bzip2	12	**883**	**131**	880	132	884	131	12	**827**	**140**	822	141	829	140
403.gcc	12	**582**	**166**	592	163	581	166	12	526	184	530	182	**528**	**183**
429.mcf	12	543	202	542	202	**543**	**202**	12	**345**	**317**	346	316	345	317
445.gobmk	12	768	164	769	164	**769**	**164**	12	701	179	**701**	**180**	701	180
456.hmmer	12	**314**	**356**	320	350	312	359	12	**284**	**395**	283	395	284	394
458.sjeng	12	922	157	**923**	**157**	923	157	12	888	163	890	163	**889**	**163**
462.libquantum	12	138	1800	138	1800	**138**	**1800**	12	**139**	**1790**	139	1790	139	1790
464.h264ref	12	1292	206	**1292**	**206**	1306	203	12	**1055**	**252**	1053	252	1056	251
471.omnetpp	12	**444**	**169**	446	168	444	169	12	445	169	446	168	**445**	**168**
473.astar	12	560	150	**558**	**151**	558	151	12	491	172	**491**	**172**	491	172
483.xalancbmk	12	342	242	344	241	**342**	**242**	12	337	245	338	245	**338**	**245**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Transparent huge pages were enabled for this run (OS default)

Huge pages were not configured for this run.
```

General Notes

```
Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/root/cpu2006-1.2/amd1206-rate-libs-revA/32:/root/cpu2006-1.2/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1

C++ benchmarks:
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
-CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
-GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
-m32 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
-CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
-m32 -HP:bdt=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:unroll_size=256 -OPT:unroll_times_max=8
-OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
-IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
-HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -OPT:alias=disjoint
-OPT:unroll_times_max=16 -OPT:unroll_size=512
-OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
-CG:cmp_peep=on -CG:pre_local_sched=off -HP:bdt=2m:heap=2m
-CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1`

462.libquantum: `-Ofast -mso -OPT:unroll_size=512 -OPT:unroll_times_max=16 -LNO:prefetch=2 -LNO:prefetch_ahead=4 -LNO:pf2=0 -CG:local_sched_alg=1 -CG:p2align=0 -INLINE:aggressive=ON -IPA:plimit=15000 -IPA:small_pu=100 -HP:bdt=2m:heap=2m,limit=300 -march=bdver2`

464.h264ref: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:unroll_size=256 -OPT:unroll_times_max=2 -IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0 -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m -march=bdver1`

C++ benchmarks:

471.omnetpp: `-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -WOPT:sib=on -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap`

473.astar: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on -CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on -OPT:alias=disjoint -INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m -march=bdver1`

483.xalancbmk: `-Ofast -LNO:prefetch=2 -OPT:unroll_size=512 -OPT:unroll_times_max=8 -D__OPEN64_FAST_SET -INLINE:aggressive=on -m32 -CG:cmp_peep=on -CG:local_sched=off -CG:p2align=1 -GRA:unspill=on -TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2 -mno-fma4 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:32:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 2 January 2013.