SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B420 M3 (ntel Xeon E5-4607, 2.20 GHz)

SPECint®_rate2006 = 715

SPECint_rate_base2006 = 686

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Jan-2013
Hardware Availability: Nov-2012
Software Availability: Feb-2012

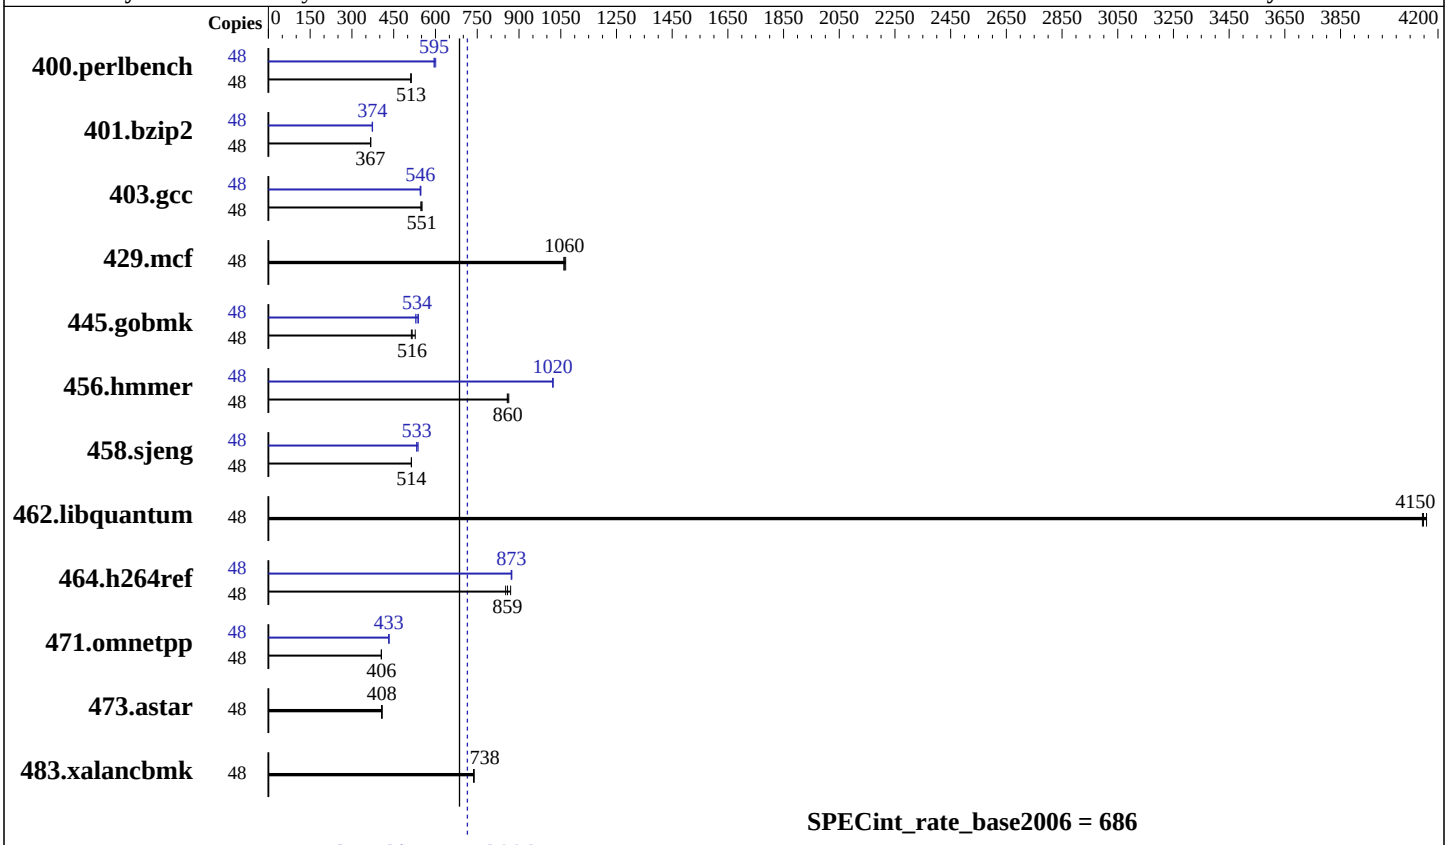

Hardware

CPU Name:	Intel Xeon E5-4607
CPU Characteristics:	
CPU MHz:	2200
FPU:	Integrated
CPU(s) enabled:	24 cores, 4 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	12 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz and CL7)
Disk Subsystem:	1 X 300 GB 15000 RPM SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B420 M3 (ntel Xeon E5-4607, 2.20 GHz)

SPECint_rate2006 = 715

SPECint_rate_base2006 = 686

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Jan-2013
Hardware Availability: Nov-2012
Software Availability: Feb-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	917	512	**915**	**513**	915	513	48	780	601	**788**	**595**	788	595
401.bzip2	48	**1262**	**367**	1259	368	1263	367	48	1238	374	**1239**	**374**	1242	373
403.gcc	48	**701**	**551**	701	551	706	547	48	**708**	**546**	705	548	709	545
429.mcf	48	**412**	**1060**	413	1060	410	1070	48	**412**	**1060**	413	1060	410	1070
445.gobmk	48	**975**	**516**	981	513	955	527	48	934	539	**943**	**534**	952	529
456.hmmer	48	522	858	**521**	**860**	519	863	48	439	1020	**438**	**1020**	438	1020
458.sjeng	48	1132	513	**1130**	**514**	1130	514	48	1080	538	**1089**	**533**	1090	533
462.libquantum	48	240	4140	239	4160	**240**	**4150**	48	240	4140	239	4160	**240**	**4150**
464.h264ref	48	1221	870	**1237**	**859**	1247	852	48	1218	872	**1216**	**873**	1215	874
471.omnetpp	48	739	406	740	406	**739**	**406**	48	**693**	**433**	693	433	693	433
473.astar	48	**827**	**408**	825	408	829	407	48	**827**	**408**	825	408	829	407
483.xalancbmk	48	448	739	**449**	**738**	449	737	48	448	739	**449**	**738**	449	737

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Configuration:
Processor C6 Report set to Disabled
Processor C1E set to Disabled
CPU Performance set to HPC
LV DDR Mode set to Performance-mode
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6800
 $Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on localhost.localdomain Thu Jan  3 01:35:47 2013

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-4607 0 @ 2.20GHz
       4 "physical id"s (chips)
       48 "processors"
```

Continued on next page

Platform Notes (Continued)

```
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 6
         siblings  : 12
         physical 0: cores 0 1 2 3 4 5
         physical 1: cores 0 1 2 3 4 5
         physical 2: cores 0 1 2 3 4 5
         physical 3: cores 0 1 2 3 4 5
      cache size : 12288 KB

   From /proc/meminfo
      MemTotal:       264504036 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      Red Hat Enterprise Linux Server release 6.2 (Santiago)

   From /etc/*release* /etc/*version*
      redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
      system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

   uname -a:
      Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
      EST 2011 x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Jan 3 01:34

   SPEC is set to: /opt/cpu2006-1.2
      Filesystem     Type    Size  Used Avail Use% Mounted on
      /dev/sda1      ext4    275G  9.9G  251G   4% /

   Additional information from dmidecode:
     Memory:
      32x 0xCE00 M393B1K70DH0-YK0 8 GB 1600 MHz 2 rank

   (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64"
 Intel HT Technology=enable
  Binaries compiled on a system with 2 X Intel Xeon E5-2690 CPU + 128 GB memory using RHEL 6.2
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
```
icpc -m32
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml`
`http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130607.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 14:54:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 29 January 2013.