



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint®\_rate2006 = 483**

Huawei E9000 CH121 (Intel Xeon E5-2658)

**SPECint\_rate\_base2006 = 467**

CPU2006 license: 3175


Test date: Jan-2013

Test sponsor: Huawei

Hardware Availability: Aug-2012

Tested by: Huawei

Software Availability: Sep-2012

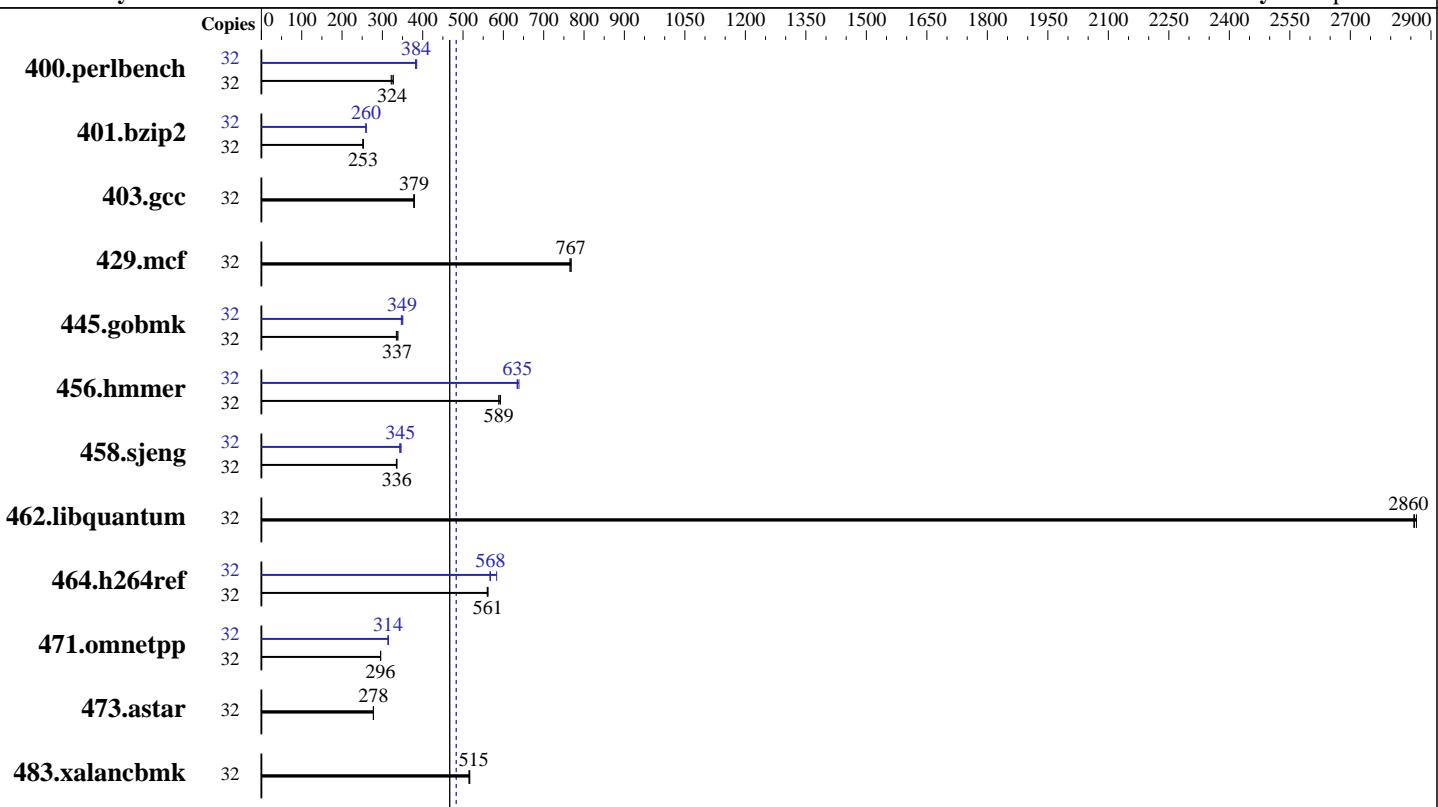

**SPECint\_rate\_base2006 = 467**

**SPECint\_rate2006 = 483**

## Hardware

CPU Name: Intel Xeon E5-2658  
CPU Characteristics: Intel Turbo Boost Technology up to 2.40 GHz  
CPU MHz: 2100  
FPU: Integrated  
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 256 KB I+D on chip per core  
L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)  
Disk Subsystem: 2 x 300 GB SAS 10 K RPM  
Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)  
Compiler: 2.6.32-220.el6.x86\_64  
C/C++: Version 13.0.1 of Intel C++ Studio XE for Linux  
Auto Parallel: No  
File System: ext3  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

**SPECint\_rate2006 = 483**

Huawei E9000 CH121 (Intel Xeon E5-2658)

**SPECint\_rate\_base2006 = 467**

CPU2006 license: 3175

Test date: Jan-2013

Test sponsor: Huawei

Hardware Availability: Aug-2012

Tested by: Huawei

Software Availability: Sep-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	<b>965</b>	<b>324</b>	971	322	955	327	32	<b>815</b>	<b>384</b>	812	385	818	382
401.bzip2	32	1229	251	<b>1222</b>	<b>253</b>	1221	253	32	1191	259	1189	260	<b>1190</b>	<b>260</b>
403.gcc	32	679	379	<b>680</b>	<b>379</b>	682	378	32	679	379	<b>680</b>	<b>379</b>	682	378
429.mcf	32	382	765	380	768	<b>380</b>	<b>767</b>	32	382	765	380	768	<b>380</b>	<b>767</b>
445.gobmk	32	1003	335	991	339	<b>997</b>	<b>337</b>	32	<b>962</b>	<b>349</b>	957	351	967	347
456.hammer	32	<b>507</b>	<b>589</b>	504	593	507	589	32	<b>470</b>	<b>635</b>	471	634	467	639
458.sjeng	32	<b>1153</b>	<b>336</b>	1153	336	1157	335	32	1129	343	<b>1124</b>	<b>345</b>	1118	346
462.libquantum	32	232	2860	232	2860	<b>232</b>	<b>2860</b>	32	232	2860	232	2860	<b>232</b>	<b>2860</b>
464.h264ref	32	<b>1262</b>	<b>561</b>	1265	560	1260	562	32	1214	583	1250	567	<b>1247</b>	<b>568</b>
471.omnetpp	32	676	296	<b>676</b>	<b>296</b>	677	295	32	635	315	<b>636</b>	<b>314</b>	637	314
473.astar	32	<b>809</b>	<b>278</b>	809	278	809	278	32	<b>809</b>	<b>278</b>	809	278	809	278
483.xalancbmk	32	427	517	<b>428</b>	<b>515</b>	429	515	32	427	517	<b>428</b>	<b>515</b>	429	515

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
Select only test related files when installing the operating system
```

## Platform Notes

```
Sysinfo program /opt/spec2006/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 ## 6f2ebdff5032aaa42e583f96b07f99d3
running on rhel62x64spec1.huawei.com Sat Jan 12 06:28:14 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2658 0 @ 2.10GHz
Continued on next page
```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 483

Huawei E9000 CH121 (Intel Xeon E5-2658)

SPECint\_rate\_base2006 = 467

CPU2006 license: 3175

Test date: Jan-2013

Test sponsor: Huawei

Hardware Availability: Aug-2012

Tested by: Huawei

Software Availability: Sep-2012

## Platform Notes (Continued)

```
2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings   : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB

From /proc/meminfo
MemTotal:      132120564 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
 Red Hat Enterprise Linux Server release 6.2 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux rhel62x64spec1.huawei.com 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9
08:03:13 EST 2011 x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Jan 12 06:27

SPEC is set to: /opt/spec2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb1        ext3  276G  29G  233G  11% /opt

Additional information from dmidecode:
(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/opt/spec2006/libs/32:/opt/spec2006/libs/64"

Binaries compiled on a system with 2 x Xeon X5650 CPU + 16GB memory  
using RHEL 6.2



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH121 (Intel Xeon E5-2658)

**SPECint\_rate2006 = 483**

CPU2006 license: 3175

**Test date:** Jan-2013

Test sponsor: Huawei

**Hardware Availability:** Aug-2012

Tested by: Huawei

**Software Availability:** Sep-2012

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -LPEC/smartheap -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 483

Huawei E9000 CH121 (Intel Xeon E5-2658)

SPECint\_rate\_base2006 = 467

CPU2006 license: 3175

Test date: Jan-2013

Test sponsor: Huawei

Hardware Availability: Aug-2012

Tested by: Huawei

Software Availability: Sep-2012

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll12 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll14 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-LPEC/smartheap -lsmartheap

473.astar: basepeak = yes

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH121 (Intel Xeon E5-2658)

**SPECint\_rate2006 = 483**

CPU2006 license: 3175

**Test date:** Jan-2013

Test sponsor: Huawei

**Hardware Availability:** Aug-2012

Tested by: Huawei

**Software Availability:** Sep-2012

## Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 14:11:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 March 2013.