



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®_rate2006 = 884

IBM Power 740 Express (4.2 GHz, 16 core)

SPECint_rate_base2006 = 626

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jan-2013

Hardware Availability: Feb-2013

Software Availability: Feb-2013

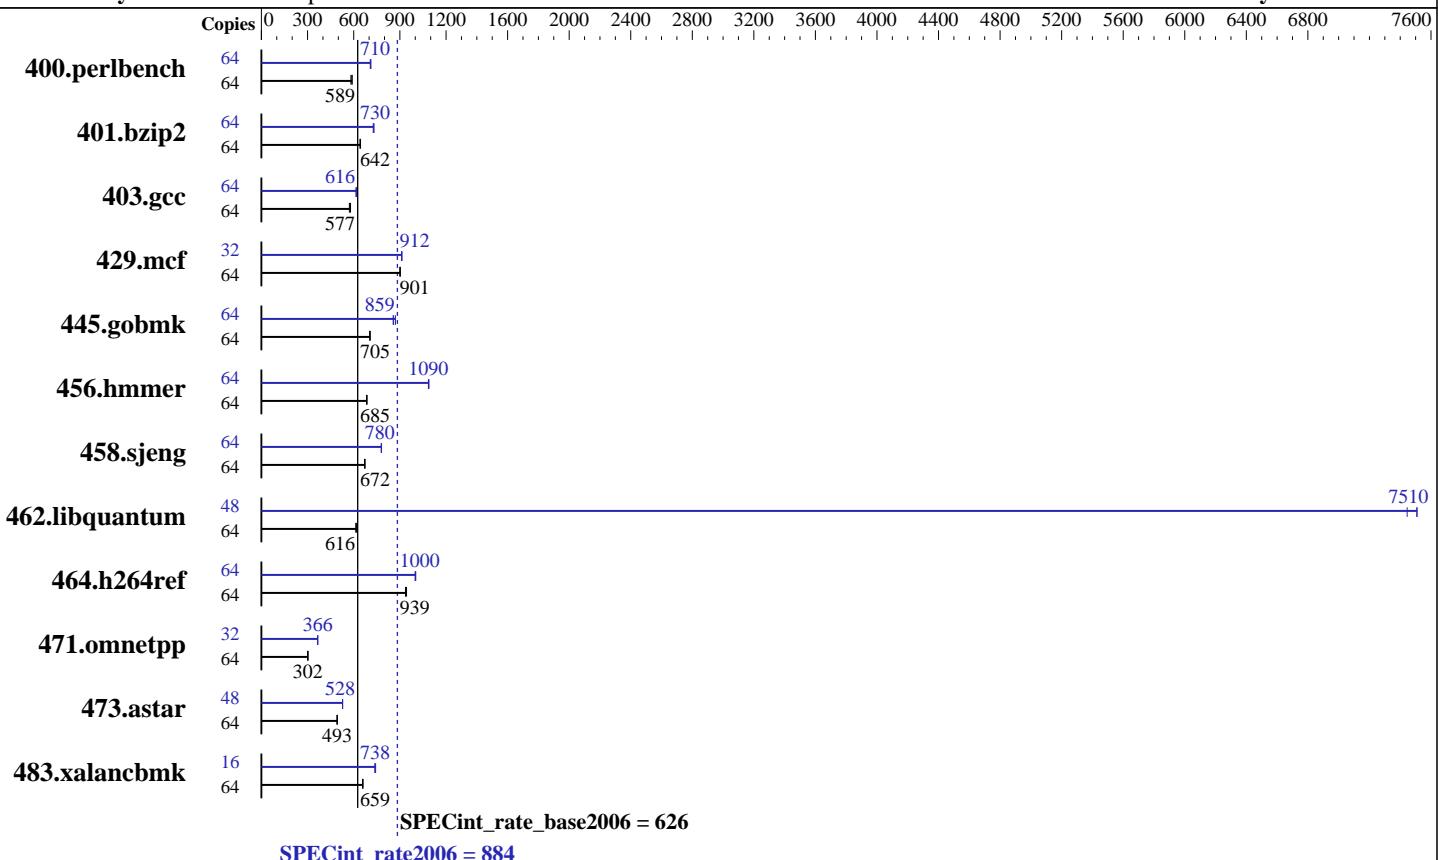

Hardware

CPU Name: POWER7+
CPU Characteristics: Intelligent Energy Optimization enabled, up to 4.540 GHz
CPU MHz: 4228
FPU: Integrated
CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 4 threads/core
CPU(s) orderable: 8, 16 cores
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 256 KB I+D on chip per core
L3 Cache: 10 MB I+D on chip per core
Other Cache: None
Memory: 128 GB (32 x 4 GB) DDR3 1066 MHz
Disk Subsystem: 2 x 177 GB Raid0 SFF-1 SSD
Other Hardware: None

Software

Operating System: IBM AIX V7.1
Compiler: C/C++: Version 12.1 of IBM XL C/C++ for AIX
Auto Parallel: No
File System: AIX/JFS2
System State: Multi-user
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 884

IBM Power 740 Express (4.2 GHz, 16 core)

SPECint_rate_base2006 = 626

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Feb-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	64	1061	589	1062	589	1075	582	64	879	711	884	708	881	710
401.bzip2	64	963	642	962	642	959	644	64	850	727	845	731	846	730
403.gcc	64	901	572	889	579	893	577	64	836	616	836	616	836	616
429.mcf	64	648	901	648	901	647	902	32	320	913	320	912	320	912
445.gobmk	64	952	705	953	705	950	707	64	781	859	784	856	771	871
456.hammer	64	872	685	871	686	873	684	64	548	1090	550	1090	550	1090
458.sjeng	64	1153	672	1151	673	1153	672	64	994	779	993	780	992	781
462.libquantum	64	2154	616	2158	615	2151	616	48	134	7450	132	7510	132	7510
464.h264ref	64	1509	939	1502	943	1513	936	64	1418	999	1412	1000	1414	1000
471.omnetpp	64	1326	302	1328	301	1321	303	32	547	366	546	366	547	365
473.astar	64	912	493	914	492	911	493	48	639	528	639	527	638	528
483.xalancbmk	64	671	658	671	659	669	660	16	149	742	150	738	150	738

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

C/C++ compiler updated to November 2012 PTF
Version: 12.01.0000.0002

Peak Tuning Notes

```
400.perlbench fdpr options: -O4 -cbpth -1 -sdp -1
401.bzip2 fdpr options: -O4 -vrox -nobldcg -sdp -1
403.gcc fdpr options: -O4 -cbpth -1 -sdp -1
429.mcf fdpr options: -O3
445.gobmk fdpr options: -O3
456.hammer fdpr options: -O4 -nodp
458.sjeng fdpr options: -O3
464.h264ref fdpr options: -O4 -sdp -1 -vrox -lu -1
473.astar fdpr options: -O3 -vrox -bldcg
483.xalancbmk fdpr options: -O3
```

Submit Notes

The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "bindprocessor" command (see flags file for details).



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 884

IBM Power 740 Express (4.2 GHz, 16 core)

SPECint_rate_base2006 = 626

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Feb-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Operating System Notes

AIX updated to V7.1 TL 2 SP2

All ulimits set to unlimited.

6400 16M large pages defined with vmo command

General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"

MEMORY_AFFINITY = "MCM"

XLF RTEOPTS = "intrinthds=1"

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Base Portability Flags

400.perlbench: -DSPEC_CPU_AIX

462.libquantum: -DSPEC_CPU_AIX

464.h264ref: -DSPEC_CPU_AIX -qchars=signed

483.xalancbmk: -DSPEC_CPU_AIX

Base Optimization Flags

C benchmarks:

-qipa=threads -bmaxdata:0x50000000 -qlargepage -O5 -qsimd -qvecnvol
-D_ILS_MACROS -qalias=noansi -qalloc -blpdata

C++ benchmarks:

-qipa=threads -bmaxdata:0x20000000 -qlargepage -O4 -D_ILS_MACROS
-qrtti=all -D__IBM_FAST_SET_MAP_ITERATOR -blpdata

Base Other Flags

C benchmarks:

-qipa=noobject -qsuppress=1500-036

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 884

IBM Power 740 Express (4.2 GHz, 16 core)

SPECint_rate_base2006 = 626

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Feb-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Base Other Flags (Continued)

C++ benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

Peak Compiler Invocation

C benchmarks:

```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:

```
/usr/vacpp/bin/xlc
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX

462.libquantum: -DSPEC_CPU_AIX

464.h264ref: -DSPEC_CPU_AIX -qchars=signed

483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2  
-qarch=auto -qtune=auto -D_ILS_MACROS -qalias=noansi  
-blpdata -btextpsize:64K
```

```
401.bzip2: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage  
-D_ILS_MACROS -blpdata -btextpsize:64K
```

```
403.gcc: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)  
-qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qalloc  
-blpdata -btextpsize:64K
```

```
429.mcf: -qipa=threads -bmaxdata:0x50000000 -O5 -qlargepage  
-D_ILS_MACROS -blpdata -btextpsize:64K
```

```
445.gobmk: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-qlargepage -D_ILS_MACROS -blpdata -btextpsize:64K
```

```
456.hammer: -qipa=threads -O5 -qsimd -qvecnvol -qassert=refalign  
-qipa=inline=threshold=2888 -qipa=inline=limit=11880  
-D_ILS_MACROS -blpdata -btextpsize:64K
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECint_rate2006 =	884
IBM Power 740 Express (4.2 GHz, 16 core)	SPECint_rate_base2006 =	626
CPU2006 license: 11	Test date:	Jan-2013
Test sponsor: IBM Corporation	Hardware Availability:	Feb-2013
Tested by: IBM Corporation	Software Availability:	Feb-2013

Peak Optimization Flags (Continued)

458.sjeng: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -04
 -D_ILS_MACROS -blpdata -btextpsize:64K

462.libquantum: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -05 -q64
 -qlargepage -D_ILS_MACROS -blpdata -btextpsize:64K

464.h264ref: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -05 -qsimd
 -qvecnvol -D_ILS_MACROS -blpdata -btextpsize:64K

C++ benchmarks:

471.omnetpp: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
 -qpdf2(pass 2) -04 -qsimd -qvecnvol -D_ILS_MACROS
 -qalign=natural -qrtti=all -qinlglue
 -D__IBM_FAST_SET_MAP_ITERATOR -blpdata -btextpsize:64K

473.astar: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
 -qpdf2(pass 2) -05 -qlargepage -D_ILS_MACROS -qinlglue
 -qalign=natural -blpdata -btextpsize:64K

483.xalancbmk: -qipa=threads -bmaxdata:0x20000000 -qpdf1(pass 1)
 -qpdf2(pass 2) -04 -qlargepage -qipa=partition=large
 -D_ILS_MACROS -qinlglue -D__IBM_VECTOR -blpdata
 -btextpsize:64K

Peak Other Flags

C benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-036

400.perlbench: -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.html>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.xml>

<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint_rate2006 = 884

IBM Power 740 Express (4.2 GHz, 16 core)

SPECint_rate_base2006 = 626

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Feb-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:13:50 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 February 2013.