SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power 750 Express (3.5 GHz, 32 core)

SPECint®_rate2006 = 1600

SPECint_rate_base2006 = 1150

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jan-2013
Hardware Availability: Mar-2013
Software Availability: Feb-2013

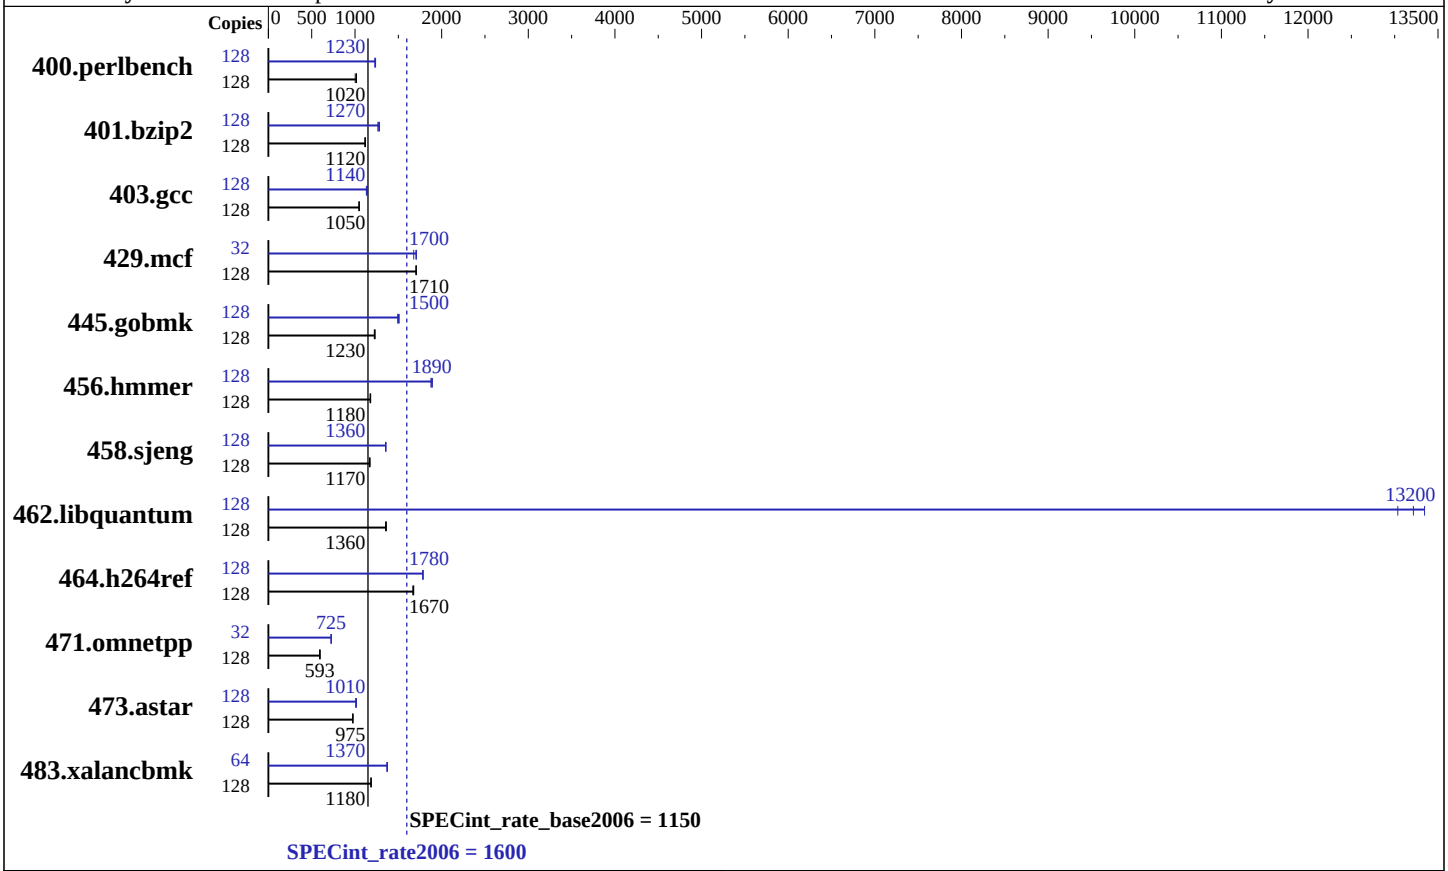

Hardware

CPU Name:	POWER7+
CPU Characteristics:	Intelligent Energy Optimization enabled, up to 3.955 GHz
CPU MHz:	3500
FPU:	Integrated
CPU(s) enabled:	32 cores, 8 chips, 4 cores/chip, 4 threads/core
CPU(s) orderable:	8, 16, 24, 32 cores
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	10 MB I+D on chip per core
Other Cache:	None
Memory:	256 GB (64 x 4 GB) DDR3 1066 MHz
Disk Subsystem:	5 x 300 GB 15K RPM Raid0 SFF SAS
Other Hardware:	None

Software

Operating System:	IBM AIX V7.1
Compiler:	C/C++: Version 12.1 of IBM XL C/C++ for AIX
Auto Parallel:	No
File System:	AIX/JFS2
System State:	Multi-user
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	None

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM Power 750 Express (3.5 GHz, 32 core)

SPECint_rate2006 = 1600

SPECint_rate_base2006 = 1150

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jan-2013
Hardware Availability: Mar-2013
Software Availability: Feb-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	128	1247	1000	**1231**	**1020**	1230	1020	128	**1016**	**1230**	1011	1240	1017	1230
401.bzip2	128	1110	1110	**1104**	**1120**	1102	1120	128	963	1280	977	1260	**970**	**1270**
403.gcc	128	**984**	**1050**	986	1050	982	1050	128	**907**	**1140**	902	1140	911	1130
429.mcf	128	**685**	**1710**	685	1700	684	1710	32	171	1710	**171**	**1700**	174	1680
445.gobmk	128	**1093**	**1230**	1091	1230	1098	1220	128	**894**	**1500**	900	1490	890	1510
456.hmmer	128	1011	1180	1017	1170	**1015**	**1180**	128	631	1890	637	1880	**634**	**1890**
458.sjeng	128	1319	1170	**1326**	**1170**	1327	1170	128	1142	1360	1146	1350	**1142**	**1360**
462.libquantum	128	1959	1350	**1956**	**1360**	1948	1360	128	**201**	**13200**	203	13000	199	13300
464.h264ref	128	1699	1670	1688	1680	**1693**	**1670**	128	1590	1780	**1588**	**1780**	1586	1790
471.omnetpp	128	1339	598	1350	593	**1349**	**593**	32	277	723	**276**	**725**	275	726
473.astar	128	923	974	**921**	**975**	921	976	128	890	1010	**889**	**1010**	884	1020
483.xalancbmk	128	744	1190	**746**	**1180**	747	1180	64	321	1370	**322**	**1370**	323	1370

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

```
C/C++ compiler updated to November 2012 PTF
      Version: 12.01.0000.0002
```

Peak Tuning Notes

```
400.perlbench fdpr options: -O4 -cbpth -1 -sdp -1
401.bzip2 fdpr options: -O4 -vrox -nobldcg -sdp -1
403.gcc fdpr options: -O4 -cbpth -1 -sdp -1
429.mcf fdpr options: -O3
445.gobmk fdpr options: -O3
456.hmmer fdpr options: -O4 -nodp
458.sjeng fdpr options: -O3
464.h264ref fdpr options: -O4 -sdp -1 -vrox -lu -1
473.astar fdpr options: -O3 -vrox -bldcg
483.xalancbmk fdpr options: -O3
```

Submit Notes

```
The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "bindprocessor" command (see flags file for details).
```

Operating System Notes

```
AIX updated to V7.1 TL 2 SP2

All ulimits set to unlimited.

12800 16M large pages defined with vmo command
```

General Notes

```
Environment variables set by runspec before the start of the run:
MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLFRTEOPTS = "intrinthds=1"
```

Base Compiler Invocation

C benchmarks:
```
/usr/vac/bin/xlc -qlanglvl=extc99
```

C++ benchmarks:
```
/usr/vacpp/bin/xlC
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_AIX`
462.libquantum: `-DSPEC_CPU_AIX`
464.h264ref: `-DSPEC_CPU_AIX -qchars=signed`
483.xalancbmk: `-DSPEC_CPU_AIX`

Base Optimization Flags

C benchmarks:
```
-qipa=threads -bmaxdata:0x50000000 -qlargepage -O5 -qsimd -qvecnvol
-D_ILS_MACROS -qalias=noansi -qalloca -blpdata
```

C++ benchmarks:
```
-qipa=threads -bmaxdata:0x20000000 -qlargepage -O4 -D_ILS_MACROS
-qrtti=all -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Base Other Flags

C benchmarks:
```
-qipa=noobject -qsuppress=1500-036
```

Continued on next page

Base Other Flags (Continued)

C++ benchmarks:
-qipa=noobject -qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:
/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:
/usr/vacpp/bin/xlC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_AIX
462.libquantum: -DSPEC_CPU_AIX
464.h264ref: -DSPEC_CPU_AIX -qchars=signed
483.xalancbmk: -DSPEC_CPU_AIX

Peak Optimization Flags

C benchmarks:

400.perlbench: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2
-qarch=auto -qtune=auto -D_ILS_MACROS -qalias=noansi
-blpdata -btextpsize:64K

401.bzip2: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -qlargepage
-D_ILS_MACROS -blpdata -btextpsize:64K

403.gcc: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qlargepage -D_ILS_MACROS -qalloca
-blpdata -btextpsize:64K

429.mcf: -qipa=threads -bmaxdata:0x50000000 -O5 -qlargepage
-D_ILS_MACROS -blpdata -btextpsize:64K

445.gobmk: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -blpdata -btextpsize:64K

456.hmmer: -qipa=threads -O5 -qsimd -qvecnvol -qassert=refalign
-qipa=inline=threshold=2888 -qipa=inline=limit=11880
-D_ILS_MACROS -blpdata -btextpsize:64K

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-qipa=threads -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O4 -D_ILS_MACROS -blpdata -btextpsize:64K`

462.libquantum: `-qipa=threads -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -q64 -qlargepage -D_ILS_MACROS -blpdata -btextpsize:64K`

464.h264ref: `-qipa=threads -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -qsimd -qvecnvol -D_ILS_MACROS -blpdata -btextpsize:64K`

C++ benchmarks:

471.omnetpp: `-qipa=threads -bmaxdata:0x20000000 -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O4 -qsimd -qvecnvol -D_ILS_MACROS -qalign=natural -qrtti=all -qinlglue -D__IBM_FAST_SET_MAP_ITERATOR -blpdata -btextpsize:64K`

473.astar: `-qipa=threads -bmaxdata:0x20000000 -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O5 -qlargepage -D_ILS_MACROS -qinlglue -qalign=natural -blpdata -btextpsize:64K`

483.xalancbmk: `-qipa=threads -bmaxdata:0x20000000 -qpdf1`(pass 1) `-qpdf2`(pass 2) `-O4 -qlargepage -qipa=partition=large -D_ILS_MACROS -qinlglue -D__IBM_FAST_VECTOR -blpdata -btextpsize:64K`

Peak Other Flags

C benchmarks (except as noted below):
`-qipa=noobject -qsuppress=1500-036`

400.perlbench: `-qsuppress=1500-036`

C++ benchmarks:
`-qipa=noobject -qsuppress=1500-036`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/IBM-XL.20110613.html
http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/IBM-XL.20110613.xml
http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:17:38 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 February 2013.