



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 1130

IBM Power 750 Express (3.5 GHz, 32 core)

SPECfp_rate_base2006 = 946

CPU2006 license: 11


Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Mar-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

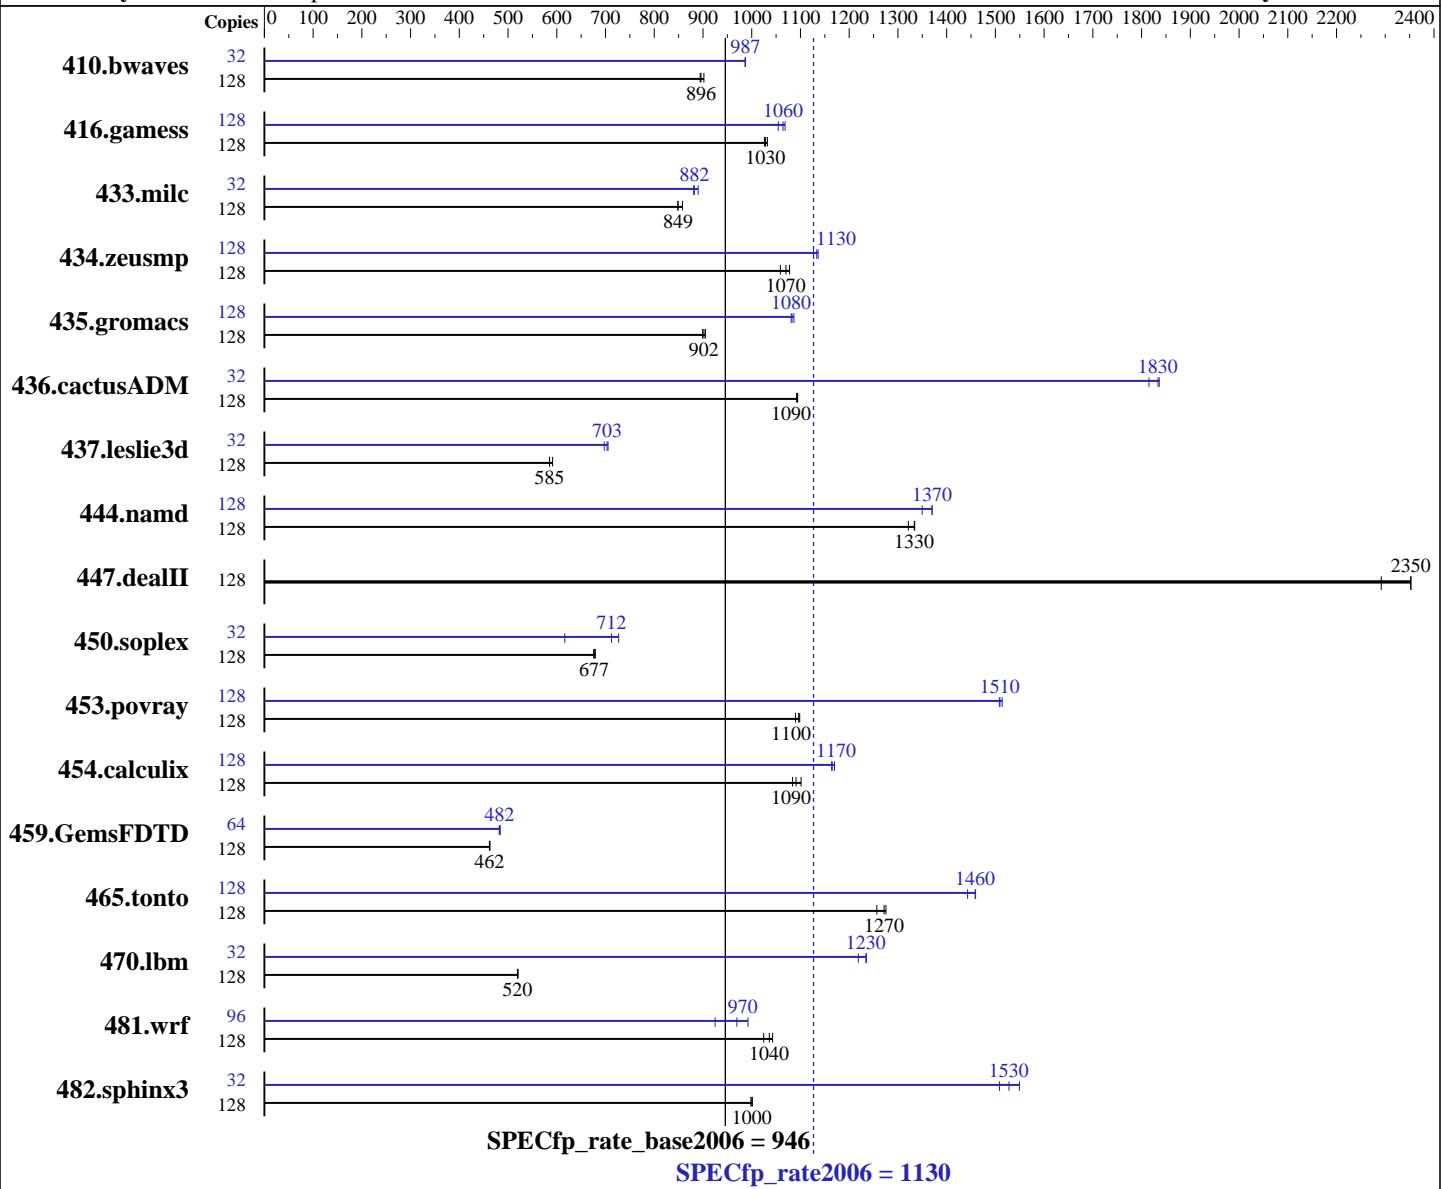

Hardware

CPU Name: POWER7+
CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.955 GHz
CPU MHz: 3500
FPU: Integrated
CPU(s) enabled: 32 cores, 8 chips, 4 cores/chip, 4 threads/core
CPU(s) orderable: 8, 16, 24, 32 cores
Primary Cache: 32 KB I + 32 KB D on chip per core

Software

Operating System: IBM AIX V7.1
Compiler: C/C++: Version 12.1 of IBM XL C/C++ for AIX; Fortran: Version 14.1 of IBM XL Fortran for AIX
Auto Parallel: No
File System: AIX/JFS2
System State: Multi-user
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1130

IBM Power 750 Express (3.5 GHz, 32 core)

SPECfp_rate_base2006 = 946

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Mar-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 10 MB I+D on chip per core
 Other Cache: None
 Memory: 256 GB (64 x 4 GB) DDR3 1066 MHz
 Disk Subsystem: 5 x 300 GB 15K RPM Raid0 SFF SAS
 Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	128	1929	902	<u>1942</u>	<u>896</u>	1945	894	32	<u>441</u>	<u>987</u>	440	987	441	986
416.gamess	128	2437	1030	2428	1030	2442	1030	128	2346	1070	<u>2355</u>	1060	2377	1050
433.milc	128	1370	858	<u>1384</u>	<u>849</u>	1385	848	32	334	881	<u>333</u>	<u>882</u>	330	890
434.zeusmp	128	1100	1060	1081	1080	<u>1088</u>	<u>1070</u>	128	1034	1130	<u>1028</u>	1130	1025	1140
435.gromacs	128	1013	902	1016	899	1010	905	128	845	1080	<u>844</u>	1080	841	1090
436.cactusADM	128	1398	1090	1400	1090	<u>1399</u>	<u>1090</u>	32	211	1820	209	1830	208	1840
437.leslie3d	128	2034	591	2057	585	2056	585	32	431	697	427	705	428	703
444.namd	128	769	1330	777	1320	770	1330	128	749	1370	749	1370	761	1350
447.dealII	128	623	2350	622	2350	639	2290	128	623	2350	622	2350	639	2290
450.soplex	128	1577	677	1580	676	1572	679	32	367	727	375	712	433	616
453.povray	128	621	1100	625	1090	620	1100	128	452	1510	451	1510	450	1510
454.calculix	128	968	1090	959	1100	974	1080	128	903	1170	907	1160	906	1170
459.GemsFDTD	128	2933	463	2941	462	2941	462	64	1409	482	1408	482	1403	484
465.tonto	128	988	1280	991	1270	1002	1260	128	863	1460	873	1440	864	1460
470.lbm	128	3385	520	3378	521	3387	519	32	356	1240	356	1230	361	1220
481.wrf	128	1396	1020	<u>1380</u>	<u>1040</u>	1371	1040	96	1159	925	1081	992	1106	970
482.sphinx3	128	2494	1000	2492	1000	2499	998	32	403	1550	408	1530	413	1510

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

C/C++ compiler updated to November 2012 PTF

Version: 12.01.0000.0002

Fortran compiler updated to November 2012 PTF

Version: 14.01.0000.0002

Peak Tuning Notes

416.gamess fdpr options: -O4 -cbpth -l -sdp -l

433.milc fdpr options: -O4 -nodp

435.gromacs fdpr options: -O

436.cactusADM fdpr options: -O3 -lu -l -nodp -sdp 9

437.leslie3d fdpr options: -O3

450.soplex fdpr options: -O4 -nodp

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1130

IBM Power 750 Express (3.5 GHz, 32 core)

SPECfp_rate_base2006 = 946

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Mar-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Peak Tuning Notes (Continued)

453.povray fdpr options: -O3 -cbpth -1
459.GemsFDTD fdpr options: -O3 -cbpth -1
465.tonto fdpr options: -O4
482.sphinx3 fdpr options: -O4 -rcctf 0 -sdp 9 -vrox

Submit Notes

The config file option 'submit' was used to assign benchmark copy to specific kernel thread using the "bindprocessor" command (see flags file for details).

Operating System Notes

AIX updated to V7.1 TL 2 SP2

All ulimits set to unlimited.

12800 16M large pages defined with vmo command

General Notes

Environment variables set by runspec before the start of the run:

MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLF RTEOPTS = "intrinthds=1"

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Base Portability Flags

410.bwaves: -qfixed

416.games: -qfixed

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1130

IBM Power 750 Express (3.5 GHz, 32 core)

SPECfp_rate_base2006 = 946

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Mar-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Base Portability Flags (Continued)

```
434.zeusmp: -qfixed  
435.gromacs: -qfixed -qextname  
436.cactusADM: -qfixed -qextname  
437.leslie3d: -qfixed  
454.calculix: -qfixed -qextname  
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE  
482.sphinx3: -qchars=signed
```

Base Optimization Flags

C benchmarks:

```
-qipa=threads -bmaxdata:0x40000000 -qlargepage -O5 -D_ILS_MACROS  
-blpdata
```

C++ benchmarks:

```
-qipa=threads -bmaxdata:0x50000000 -qlargepage -O5 -qsimd -qvecnvol  
-D_ILS_MACROS -qrtti=all -D__IBM_FAST_VECTOR  
-D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Fortran benchmarks:

```
-qipa=threads -bmaxdata:0x60000000 -qlargepage -O5  
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:

```
-qipa=threads -bmaxdata:0x60000000 -qlargepage -O5 -D_ILS_MACROS  
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Base Other Flags

C benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=noobject -qsuppress=1500-036
```

Fortran benchmarks:

```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036
```

Benchmarks using both Fortran and C:

```
-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1130

IBM Power 750 Express (3.5 GHz, 32 core)

SPECfp_rate_base2006 = 946

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Mar-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -qipa=threads -bmaxdata:0x40000000 -O5 -qlargepage
-D_ILS_MACROS -qalign=natural -blpdata -btextpsize:64K

470.lbm: -qipa=threads -bmaxdata:0x30000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -D_ILS_MACROS -blpdata -btextpsize:64K

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-D_ILS_MACROS -blpdata -btextpsize:64K

C++ benchmarks:

444.namd: -qipa=threads -O4 -q64 -qlargepage -D_ILS_MACROS
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
-btextpsize:64K

447.dealII: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1130

IBM Power 750 Express (3.5 GHz, 32 core)

SPECfp_rate_base2006 = 946

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Mar-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Peak Optimization Flags (Continued)

450.soplex: -qipa=threads -bmaxdata:0x40000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O3 -qarch=auto -qtune=auto -D_ILS_MACROS
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
-btextpsize:64K

453.povray: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qsimd
-qvecnvol -qlargepage -D_ILS_MACROS -qalign=natural
-blpdata -btextpsize:64K

Fortran benchmarks:

410.bwaves: -qipa=threads -bmaxdata:0x50000000 -O5 -qlargepage
-qsmallstack=dynlenonheap -blpdata -btextpsize:64K

416.gamess: -qipa=threads -bmaxdata:0x40000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qarch=pwr5 -qlargepage -qalias=nostd
-blpdata -btextpsize:64K

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3
-qarch=auto -qtune=auto -qlargepage -qxlf90=nosignedzero
-blpdata -btextpsize:64K

437.leslie3d: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -blpdata
-btextpsize:64K

459.GemsFDTD: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -q64 -qlargepage
-blpdata -btextpsize:64K

465.tonto: -qipa=threads -bmaxdata:0x50000000 -qpdf1(pass 1)
-qpdf2(pass 2) -O5 -qsimd -qvecnvol -blpdata
-btextpsize:64K

Benchmarks using both Fortran and C:

435.gromacs: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5
-D_ILS_MACROS -blpdata -btextpsize:64K

436.cactusADM: -qipa=threads -bmaxdata:0x60000000 -O4 -qsimd -qvecnvol
-D_ILS_MACROS -qnostrict -blpdata -btextpsize:64K

454.calculix: -qipa=threads -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qsimd
-qvecnvol -qlargepage -D_ILS_MACROS -blpdata
-btextpsize:64K

481.wrf: -qipa=threads -bmaxdata:0x30000000 -O5 -qsimd -qvecnvol
-D_ILS_MACROS -blpdata -btextpsize:64K



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1130

IBM Power 750 Express (3.5 GHz, 32 core)

SPECfp_rate_base2006 = 946

CPU2006 license: 11

Test date: Jan-2013

Test sponsor: IBM Corporation

Hardware Availability: Mar-2013

Tested by: IBM Corporation

Software Availability: Feb-2013

Peak Other Flags

C benchmarks:

-qipa=noobject -qsuppress=1500-036

C++ benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-036

450.soplex: -qsuppress=1500-036

Fortran benchmarks (except as noted below):

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

434.zeusmp: -qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

Benchmarks using both Fortran and C (except as noted below):

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

481.wrf: -qsuppress=1500-010 -qsuppress=cmpmsg -qsuppress=1500-036

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.html>
<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20110613.xml>
<http://www.spec.org/cpu2006/flags/IBM-AIX.20110613.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:12:42 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 February 2013.