



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company


SPECint®\_rate2006 = 566

ProLiant DL580 G7  
(2.40 GHz, Intel Xeon E7-4870)

SPECint\_rate\_base2006 = 536

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Feb-2013  
Hardware Availability: Dec-2012  
Software Availability: Jul-2012

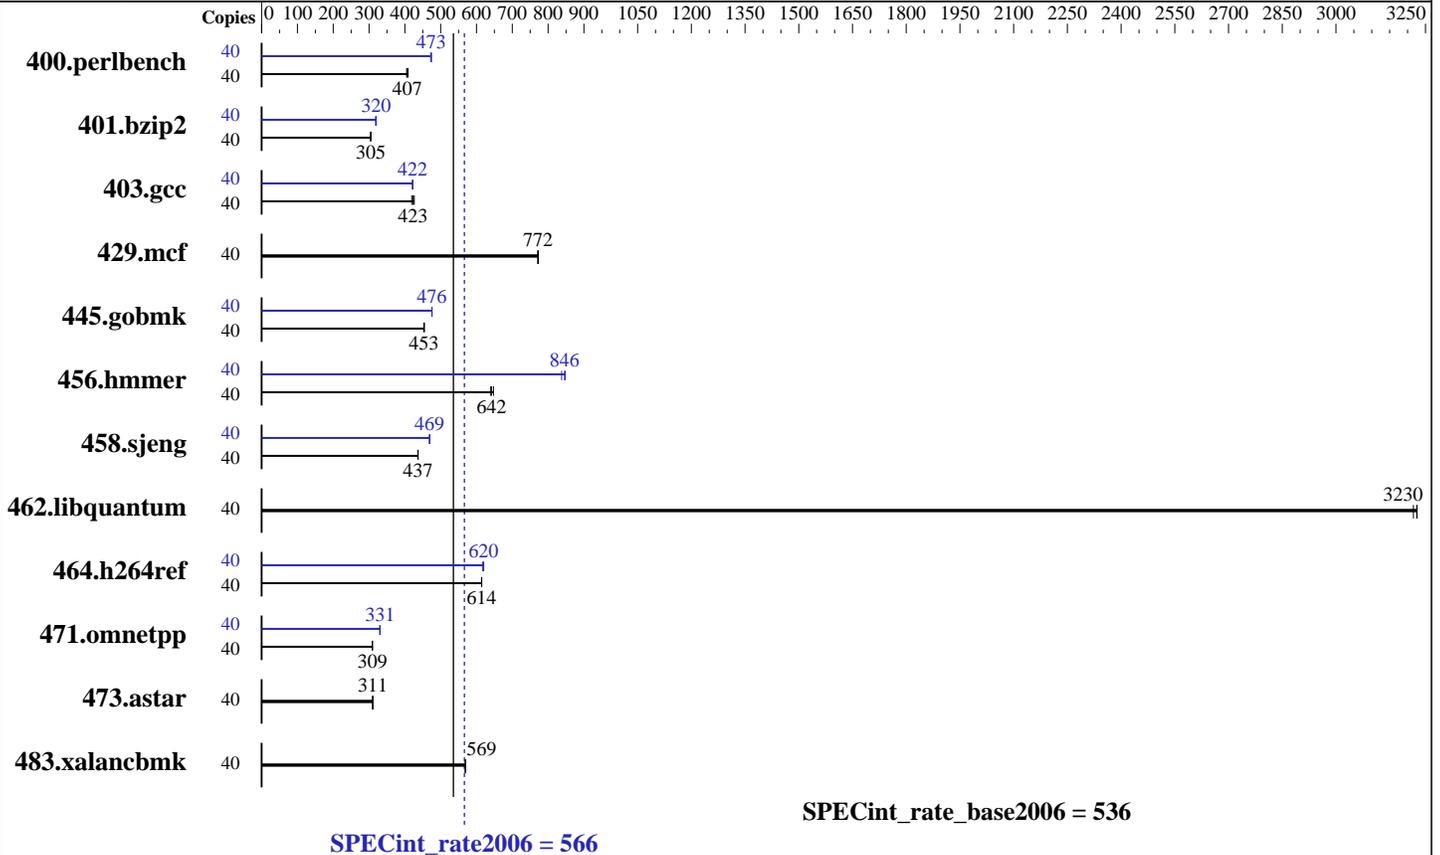

### Hardware

CPU Name: Intel Xeon E7-4870  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (32 x 4 GB 2Rx4 PC3-10600R-9, ECC)  
 Disk Subsystem: 2 x 146 GB 10 K SAS, RAID 1  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.3, (Santiago)  
 2.6.32-279.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

ProLiant DL580 G7  
(2.40 GHz, Intel Xeon E7-4870)

SPECint\_rate2006 = 566

SPECint\_rate\_base2006 = 536

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Feb-2013  
Hardware Availability: Dec-2012  
Software Availability: Jul-2012

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	<b>961</b>	<b>407</b>	955	409	965	405	40	<b>826</b>	<b>473</b>	827	473	824	474
401.bzip2	40	1266	305	1270	304	<b>1267</b>	<b>305</b>	40	<b>1207</b>	<b>320</b>	1212	318	1207	320
403.gcc	40	<b>761</b>	<b>423</b>	755	426	768	419	40	765	421	<b>763</b>	<b>422</b>	763	422
429.mcf	40	472	772	473	772	<b>473</b>	<b>772</b>	40	472	772	473	772	<b>473</b>	<b>772</b>
445.gobmk	40	923	455	926	453	<b>925</b>	<b>453</b>	40	882	476	882	476	<b>882</b>	<b>476</b>
456.hmmer	40	583	640	576	647	<b>581</b>	<b>642</b>	40	440	848	<b>441</b>	<b>846</b>	445	838
458.sjeng	40	1109	436	1107	437	<b>1109</b>	<b>437</b>	40	1033	469	1031	469	<b>1032</b>	<b>469</b>
462.libquantum	40	258	3220	257	3230	<b>257</b>	<b>3230</b>	40	258	3220	257	3230	<b>257</b>	<b>3230</b>
464.h264ref	40	1441	614	1440	615	<b>1441</b>	<b>614</b>	40	1427	620	<b>1429</b>	<b>620</b>	1433	618
471.omnetpp	40	809	309	<b>808</b>	<b>309</b>	808	310	40	756	331	<b>756</b>	<b>331</b>	758	330
473.astar	40	906	310	904	311	<b>904</b>	<b>311</b>	40	906	310	904	311	<b>904</b>	<b>311</b>
483.xalancbmk	40	484	570	<b>485</b>	<b>569</b>	486	568	40	484	570	<b>485</b>	<b>569</b>	486	568

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

## Platform Notes

BIOS Configuration:  
HP Power Profile set to Maximum Performance  
Thermal Configuration set to Increased Cooling  
Collaborative Power Control set to Disabled  
System Locality Information Table set to Enabled

```
Sysinfo program /cpu2006/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on dl580g7-bt Fri Feb 8 14:39:09 2013
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECint\_rate2006 = 566**

ProLiant DL580 G7  
(2.40 GHz, Intel Xeon E7-4870)

**SPECint\_rate\_base2006 = 536**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Feb-2013  
**Hardware Availability:** Dec-2012  
**Software Availability:** Jul-2012

### Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E7- 4870 @ 2.40GHz
 2 "physical id"s (chips)
 40 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 10
  siblings  : 20
  physical 0: cores 0 1 2 8 9 16 17 18 24 25
  physical 1: cores 0 1 2 8 9 16 17 18 24 25
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      132142436 kB
HugePages_Total:      0
Hugepagesize:    2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux dl580g7-bt 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 8 14:29
```

```
SPEC is set to: /cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3       ext4      127G  7.1G  114G   6% /
```

```
Additional information from dmidecode:
BIOS HP P65 12/03/2012
Memory:
 32x Not Specified Not Specified 4 GB 1333 MHz 2 rank
```

(End of data from sysinfo program)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 566**

ProLiant DL580 G7  
(2.40 GHz, Intel Xeon E7-4870)

**SPECint\_rate\_base2006 = 536**

**CPU2006 license:** 3

**Test date:** Feb-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Dec-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jul-2012

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RHEL5.5

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/smartheap -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc -m32

400.perlbench: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 566**

ProLiant DL580 G7  
(2.40 GHz, Intel Xeon E7-4870)

**SPECint\_rate\_base2006 = 536**

**CPU2006 license:** 3

**Test date:** Feb-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Dec-2012

**Tested by:** Hewlett-Packard Company

**Software Availability:** Jul-2012

## Peak Compiler Invocation (Continued)

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:

`icpc -m32`

## Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`  
401.bzip2: `-DSPEC_CPU_LP64`  
456.hmmer: `-DSPEC_CPU_LP64`  
458.sjeng: `-DSPEC_CPU_LP64`  
462.libquantum: `-DSPEC_CPU_LINUX`  
483.xalancbmk: `-DSPEC_CPU_LINUX`

## Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-auto-ilp32`

401.bzip2: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)`  
`-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)`  
`-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)`  
`-unroll4 -auto-ilp32`

462.libquantum: `basepeak = yes`

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 566**

ProLiant DL580 G7  
(2.40 GHz, Intel Xeon E7-4870)

**SPECint\_rate\_base2006 = 536**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Feb-2013  
**Hardware Availability:** Dec-2012  
**Software Availability:** Jul-2012

## Peak Optimization Flags (Continued)

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-A.20120829.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 15:15:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 26 February 2013.