



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp®_rate2006 = 176

BL275 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp_rate_base2006 = 172

CPU2006 license: 20


Test date: Feb-2013

Test sponsor: Bull SAS

Hardware Availability: Sep-2012

Tested by: Bull SAS

Software Availability: Oct-2012

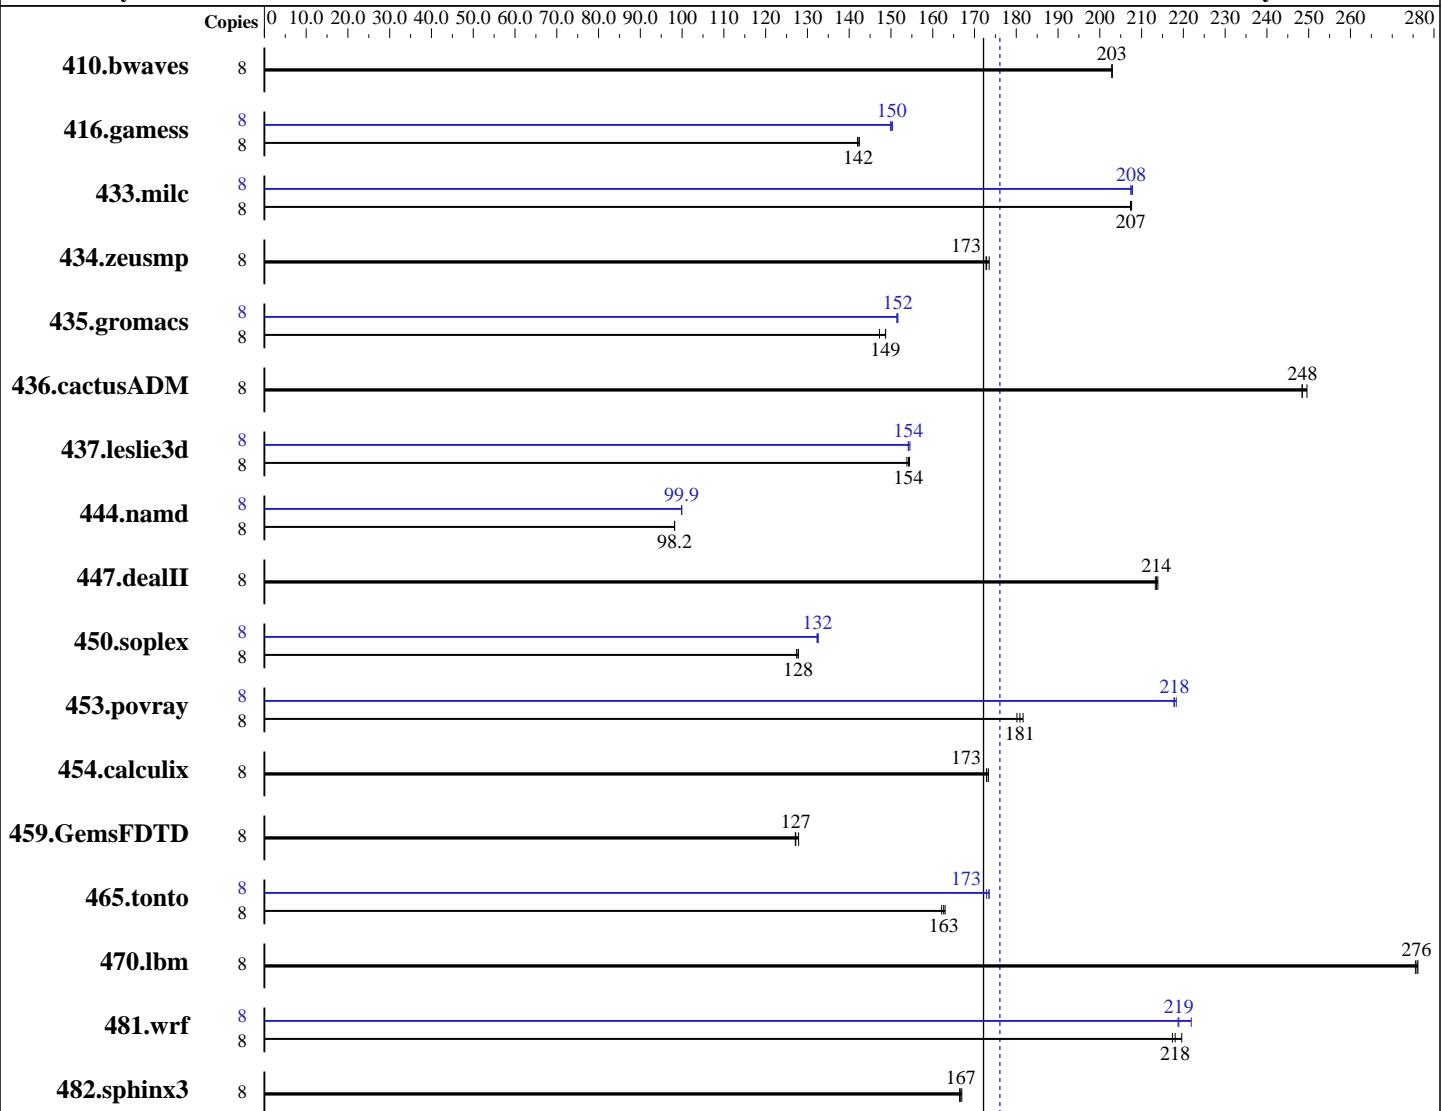

SPECfp_rate_base2006 = 172

SPECfp_rate2006 = 176

Hardware

CPU Name: Intel Xeon E5-2403
 CPU Characteristics:
 CPU MHz: 1800
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.2 (Santiago)
 Compiler: 2.6.32-220.el6.x86_64
 C/C++: Version 13.0.0.133 of Intel C++ Studio XE for Linux;
 Fortran: Version 13.0.0.133 of Intel Fortran Studio XE for Linux
 Auto Parallel: No
 File System: ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 176

BL275 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp_rate_base2006 = 172

CPU2006 license: 20

Test date: Feb-2013

Test sponsor: Bull SAS

Hardware Availability: Sep-2012

Tested by: Bull SAS

Software Availability: Oct-2012

L3 Cache: 10 MB I+D on chip per chip
 Other Cache: None
 Memory: 96 GB (12 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1066 MHz and CL7)
 Disk Subsystem: 2 x 146 GB 15000 RPM SAS, RAID 0
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: None

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|-------------|------------|------------|------------|------------|-------------|--------|------------|------------|-------------|------------|------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 8 | <u>536</u> | <u>203</u> | 536 | 203 | 536 | 203 | 8 | <u>536</u> | <u>203</u> | 536 | 203 | 536 | 203 |
| 416.gamess | 8 | <u>1102</u> | <u>142</u> | 1100 | 142 | 1103 | 142 | 8 | 1042 | 150 | <u>1043</u> | <u>150</u> | 1045 | 150 |
| 433.milc | 8 | <u>354</u> | <u>207</u> | 354 | 208 | 354 | 207 | 8 | 353 | 208 | <u>354</u> | <u>208</u> | 354 | 207 |
| 434.zeusmp | 8 | 421 | 173 | <u>421</u> | <u>173</u> | 420 | 174 | 8 | 421 | 173 | <u>421</u> | <u>173</u> | 420 | 174 |
| 435.gromacs | 8 | 384 | 149 | <u>384</u> | <u>149</u> | 388 | 147 | 8 | 377 | 152 | 377 | 151 | <u>377</u> | <u>152</u> |
| 436.cactusADM | 8 | 385 | 248 | 383 | 250 | <u>385</u> | <u>248</u> | 8 | 385 | 248 | 383 | 250 | <u>385</u> | <u>248</u> |
| 437.leslie3d | 8 | <u>488</u> | <u>154</u> | 487 | 154 | 489 | 154 | 8 | 488 | 154 | <u>488</u> | <u>154</u> | 487 | 155 |
| 444.namd | 8 | 653 | 98.2 | 653 | 98.2 | <u>653</u> | <u>98.2</u> | 8 | 642 | 99.9 | 642 | 99.9 | <u>642</u> | <u>99.9</u> |
| 447.dealII | 8 | 428 | 214 | 429 | 213 | <u>429</u> | <u>214</u> | 8 | 428 | 214 | 429 | 213 | <u>429</u> | <u>214</u> |
| 450.soplex | 8 | 524 | 127 | 522 | 128 | <u>522</u> | <u>128</u> | 8 | <u>504</u> | <u>132</u> | 504 | 132 | <u>503</u> | 133 |
| 453.povray | 8 | 236 | 180 | <u>235</u> | <u>181</u> | 234 | 182 | 8 | <u>195</u> | <u>218</u> | 195 | 218 | 195 | 218 |
| 454.calculix | 8 | 381 | 173 | 382 | 173 | <u>382</u> | <u>173</u> | 8 | 381 | 173 | 382 | 173 | <u>382</u> | <u>173</u> |
| 459.GemsFDTD | 8 | <u>667</u> | <u>127</u> | 668 | 127 | 664 | 128 | 8 | <u>667</u> | <u>127</u> | 668 | 127 | 664 | 128 |
| 465.tonto | 8 | <u>484</u> | <u>163</u> | 483 | 163 | 485 | 162 | 8 | <u>454</u> | <u>173</u> | 455 | 173 | <u>454</u> | 173 |
| 470.lbm | 8 | <u>398</u> | <u>276</u> | 398 | 276 | 399 | 276 | 8 | <u>398</u> | <u>276</u> | 398 | 276 | 399 | 276 |
| 481.wrf | 8 | 407 | 220 | <u>410</u> | <u>218</u> | 411 | 217 | 8 | 409 | 219 | 403 | 222 | <u>408</u> | <u>219</u> |
| 482.sphinx3 | 8 | 934 | 167 | <u>935</u> | <u>167</u> | 937 | 166 | 8 | 934 | 167 | <u>935</u> | <u>167</u> | 937 | 166 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 176

BL275 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp_rate_base2006 = 172

CPU2006 license: 20

Test date: Feb-2013

Test sponsor: Bull SAS

Hardware Availability: Sep-2012

Tested by: Bull SAS

Software Availability: Oct-2012

Platform Notes

```
Sysinfo program /spec/cpu2006.1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$
running on localhost.localdomain Thu Feb 21 21:38:07 2013
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2403 0 @ 1.80GHz
        2 "physical id"s (chips)
        8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
    cpu cores : 4
    siblings : 4
    physical 0: cores 0 1 2 3
    physical 1: cores 0 1 2 3
    cache size : 10240 KB
```

```
From /proc/meminfo
    MemTotal:      99039688 kB
    HugePages_Total:       0
    Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.2 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.2 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux localhost.localdomain 2.6.32-220.el6.x86_64 #1 SMP Wed Nov 9 08:03:13
EST 2011 x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Feb 21 10:26
```

```
SPEC is set to: /spec/cpu2006.1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/VolGroup-lv_root
                    ext4   153G   20G  126G  14%  /
```

```
Additional information from dmidecode:
BIOS IBM Corp. -[AHEG24BUS-1.21]- 01/25/2013
Memory:
 12x Samsung M392B1K70DM0-CK0 8 GB 1066 MHz 2 rank
```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 176

BL275 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp_rate_base2006 = 172

CPU2006 license: 20

Test date: Feb-2013

Test sponsor: Bull SAS

Hardware Availability: Sep-2012

Tested by: Bull SAS

Software Availability: Oct-2012

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/spec/cpu2006.1.2/libs/32:/spec/cpu2006.1.2/libs/64:/spec/cpu2006.1.2/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RHEL5.5

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 176

BL275 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp_rate_base2006 = 172

CPU2006 license: 20

Test date: Feb-2013

Test sponsor: Bull SAS

Hardware Availability: Sep-2012

Tested by: Bull SAS

Software Availability: Oct-2012

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 176

BL275 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp_rate_base2006 = 172

CPU2006 license: 20

Test date: Feb-2013

Test sponsor: Bull SAS

Hardware Availability: Sep-2012

Tested by: Bull SAS

Software Availability: Oct-2012

Peak Portability Flags (Continued)

```
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -static -auto-ilp32
```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -fno-alias -auto-ilp32
```

447.dealII: basepeak = yes

```
450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -opt-malloc-options=3
```

```
453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
           -prof-use(pass 2) -unroll14 -ansi-alias
```

Fortran benchmarks:

410.bwaves: basepeak = yes

```
416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
           -inline-level=0 -scalar-rep- -static
```

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 176

BL275 (Intel Xeon E5-2403, 1.80 GHz)

SPECfp_rate_base2006 = 172

CPU2006 license: 20

Test date: Feb-2013

Test sponsor: Bull SAS

Hardware Availability: Sep-2012

Tested by: Bull SAS

Software Availability: Oct-2012

Peak Optimization Flags (Continued)

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14 -auto
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-prefetch -static -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Bull-Platform-Settings-V1.2.20130313.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Bull-Platform-Settings-V1.2.20130313.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 14:43:20 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 March 2013.