



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp[®]_rate2006 = 441

Servidor Itautec MX215 (Intel Xeon E5-2650)

SPECfp_rate_base2006 = 428

CPU2006 license: 9001


Test date: Apr-2013

Test sponsor: Itautec

Hardware Availability: Jun-2012

Tested by: Itautec

Software Availability: Jan-2013

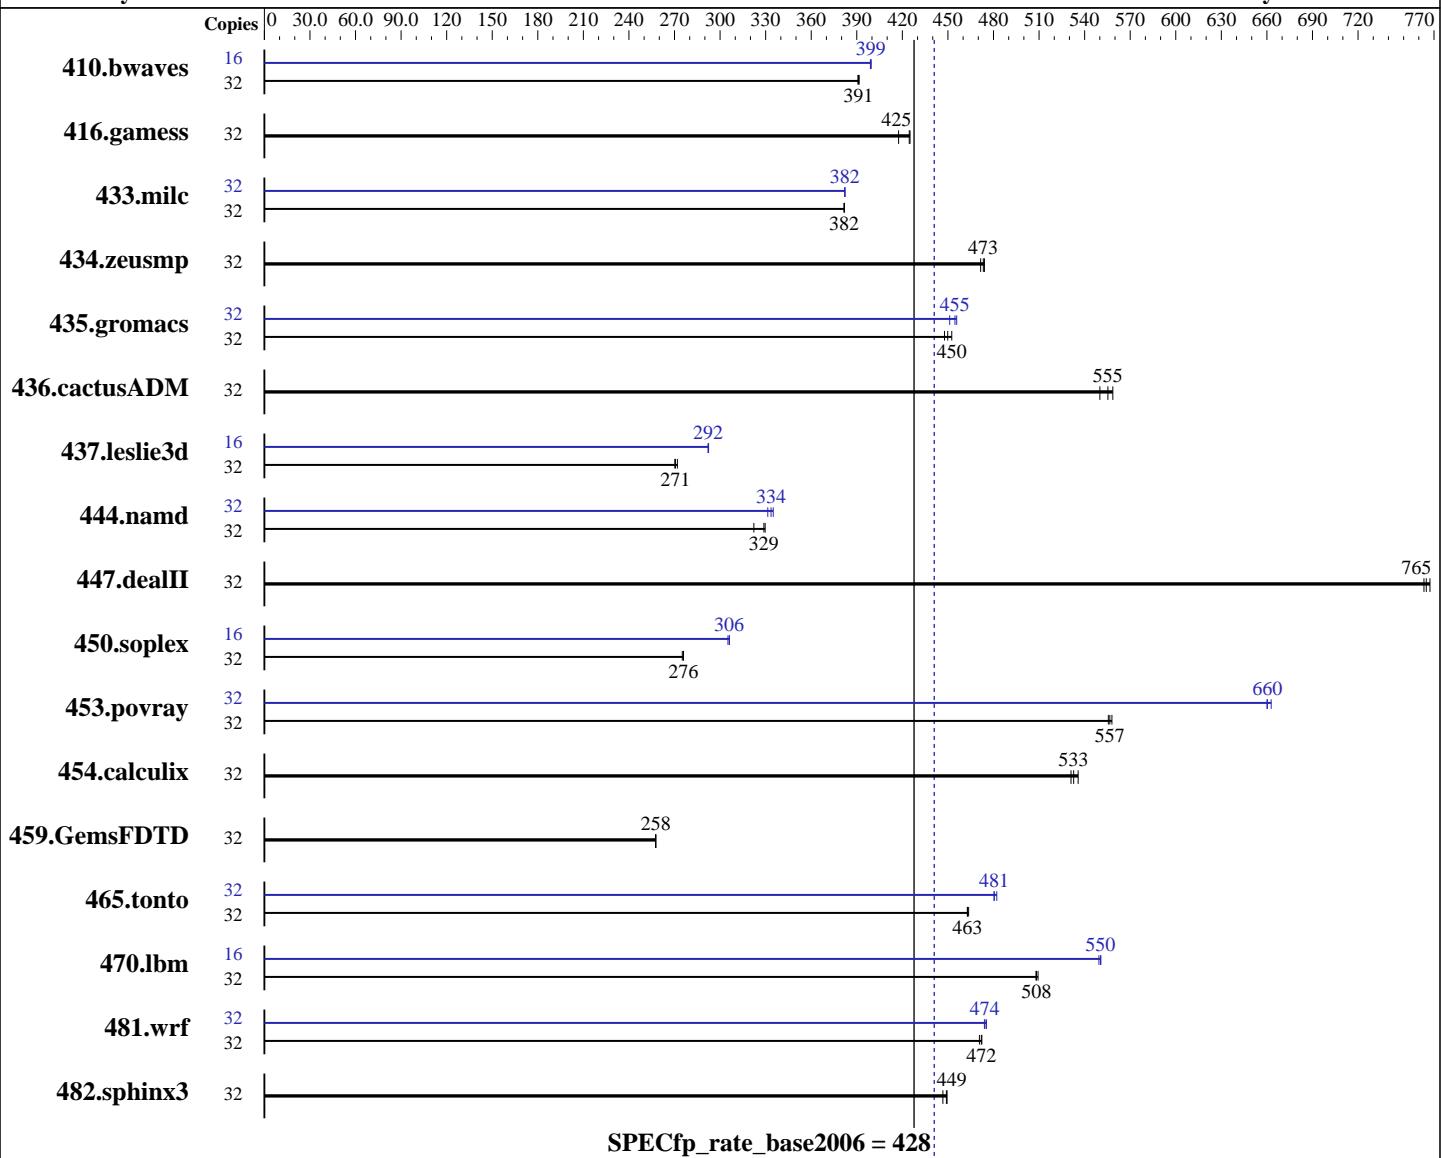

Hardware

CPU Name: Intel Xeon E5-2650
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Software

Operating System: Red Hat Enterprise Linux Server release 6.3, 2.6.32-279.el6.x86_64
 Compiler: C/C++/Fortran: Version 13.1.0.146 of Intel Compiler XE Build 20130121
 Auto Parallel:
 File System: ext4
 System State: Run level 3 (multi-user)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp_rate2006 = 441

Servidor Itautec MX215 (Intel Xeon E5-2650)

SPECfp_rate_base2006 = 428

CPU2006 license: 9001

Test date: Apr-2013

Test sponsor: Itautec

Hardware Availability: Jun-2012

Tested by: Itautec

Software Availability: Jan-2013

L3 Cache: 20 MB I+D on chip per chip
 Other Cache: None
 Memory: 128 GB (16 x 8 GB 2Rx8 PC3-12800R-11, ECC)
 Disk Subsystem: 500 GB, SATA-3, 7200 RPM
 Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	1112	391	1111	392	1113	391	16	544	399	545	399	545	399
416.gamess	32	1501	418	1476	425	1474	425	32	1501	418	1476	425	1474	425
433.milc	32	770	382	769	382	770	382	32	769	382	769	382	769	382
434.zeusmp	32	618	472	615	473	614	474	32	618	472	615	473	614	474
435.gromacs	32	508	450	505	453	510	448	32	506	451	501	456	503	455
436.cactusADM	32	685	559	695	550	689	555	32	685	559	695	550	689	555
437.leslie3d	32	1106	272	1113	270	1112	271	16	515	292	514	292	515	292
444.namd	32	778	330	780	329	796	322	32	769	334	774	331	766	335
447.dealII	32	479	765	480	763	477	767	32	479	765	480	763	477	767
450.soplex	32	970	275	967	276	967	276	16	436	306	437	305	436	306
453.povray	32	306	557	305	558	306	556	32	258	660	257	663	258	660
454.calculix	32	493	536	496	533	497	531	32	493	536	496	533	497	531
459.GemsFDTD	32	1318	258	1318	258	1318	258	32	1318	258	1318	258	1318	258
465.tonto	32	680	463	680	463	679	464	32	653	482	656	480	655	481
470.lbm	32	865	508	863	509	866	508	16	400	549	399	550	399	551
481.wrf	32	759	471	757	472	757	472	32	753	474	752	475	754	474
482.sphinx3	32	1396	447	1389	449	1388	449	32	1396	447	1389	449	1388	449

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
 numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.
 Large pages were not enabled for this run

Platform Notes

Sysinfo program /home/rccaneca/cpu2006/Docs/sysinfo
 \$Rev: 6775 \$ \$Date::: 2011-08-16 #\\$ 8787f7622badcf24e01c368b1db4377c
 running on mx225 Mon Apr 1 10:52:38 2013

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECfp_rate2006 = 441

Servidor Itaute MX215 (Intel Xeon E5-2650)

SPECfp_rate_base2006 = 428

CPU2006 license: 9001

Test date: Apr-2013

Test sponsor: Itaute

Hardware Availability: Jun-2012

Tested by: Itaute

Software Availability: Jan-2013

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 0 @ 2.00GHz
        2 "physical id"s (chips)
        32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
        cpu cores : 8
        siblings : 16
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal:      132104784 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.3 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.3 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux mx225 2.6.32-279.el6.x86_64 #1 SMP Wed Jun 13 18:24:36 EDT 2012 x86_64
x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 1 10:50
```

```
SPEC is set to: /home/rchaneca/cpu2006
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_mx225-lv_home
                  ext4   404G  2.3G  382G   1%  /home
```

(End of data from sysinfo program)

General Notes

This result was measured on the Servidor Itaute MX225.

The Servidor Itaute MX215 and the Servidor Itaute MX225 are electronically equivalent.

runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX215 (Intel Xeon E5-2650)

SPECfp_rate2006 = 441

CPU2006 license: 9001

Test sponsor: Itautec

Tested by: Itautec

Test date: Apr-2013

Hardware Availability: Jun-2012

Software Availability: Jan-2013

General Notes (Continued)

Filesystem page cache cleared with:
`echo 1 > /proc/sys/vm/drop_caches`

Environment variables set by runspec before the start of the run:

`KMP_AFFINITY = "granularity=fine,scatter"`

Filesystem page cache cleared with:

`echo 1 > /proc/sys/vm/drop_caches`

Base Compiler Invocation

C benchmarks:

`icc -m64`

C++ benchmarks:

`icpc -m64`

Fortran benchmarks:

`ifort -m64`

Benchmarks using both Fortran and C:

`icc -m64 ifort -m64`

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:

`-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32
-ansi-alias -opt-mem-layout-trans=3`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECfp_rate2006 = 441

Servidor Itaute MX215 (Intel Xeon E5-2650)

SPECfp_rate_base2006 = 428

CPU2006 license: 9001

Test date: Apr-2013

Test sponsor: Itaute

Hardware Availability: Jun-2012

Tested by: Itaute

Software Availability: Jan-2013

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -auto-p32  
-ansi-alias -opt-mem-layout-trans=3
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m64
```

450.soplex: icpc -m32

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
437.leslie3d: -DSPEC_CPU_LP64  
444.namd: -DSPEC_CPU_LP64  
447.dealII: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
470.lbm: -DSPEC_CPU_LP64
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

Servidor Itautec MX215 (Intel Xeon E5-2650)

SPECfp_rate2006 = 441

CPU2006 license: 9001

Test date: Apr-2013

Test sponsor: Itautec

Hardware Availability: Jun-2012

Tested by: Itautec

Software Availability: Jan-2013

Peak Portability Flags (Continued)

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32
-opt-mem-layout-trans=3

470.lbm: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3
-ansi-alias -opt-prefetch -auto-ilp32
-opt-mem-layout-trans=3

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -opt-malloc-options=3

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static

416.gamess: basepeak = yes

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -static -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -unroll4 -auto -inline-calloc
-opt-malloc-options=3

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaute

SPECfp_rate2006 = 441

Servidor Itaute MX215 (Intel Xeon E5-2650)

SPECfp_rate_base2006 = 428

CPU2006 license: 9001

Test date: Apr-2013

Test sponsor: Itaute

Hardware Availability: Jun-2012

Tested by: Itaute

Software Availability: Jan-2013

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
               -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch
               -static -auto-ilp32 -opt-mem-layout-trans=3
```

```
436.cactusADM: basepeak = yes
```

```
454.calculix: basepeak = yes
```

```
481.wrf: -xAVX -ipo -O3 -no-prec-div -static -auto-ilp32
          -opt-mem-layout-trans=3
```

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/Itaute-Servidor_Itaute-Intel-Linux-Platform.20130507.html
<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>

You can also download the XML flags sources by saving the following links:

http://www.spec.org/cpu2006/flags/Itaute-Servidor_Itaute-Intel-Linux-Platform.20130507.xml
<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:35:13 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 May 2013.