SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer AR320 F2 (Intel Xeon E3-1220 v2)

SPECint®_rate2006 = 156

SPECint_rate_base2006 = 150

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: May-2013
Hardware Availability: Jan-2012
Software Availability: Feb-2013

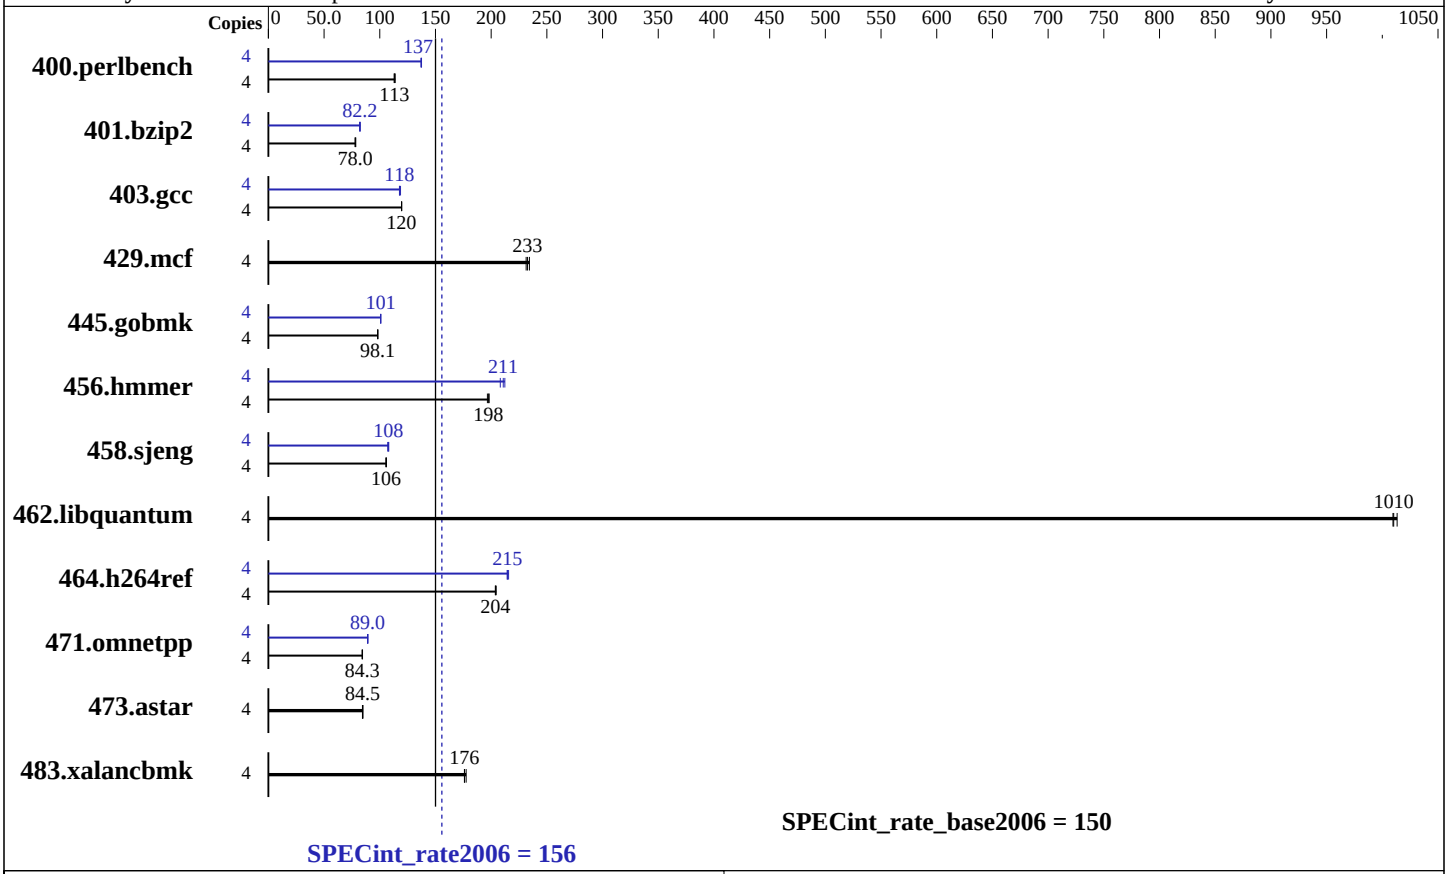

Hardware

CPU Name:	Intel Xeon E3-1220 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.5 GHz
CPU MHz:	3100
FPU:	Integrated
CPU(s) enabled:	4 cores, 1 chip, 4 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	8 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (2 x 8 GB 2Rx8 PC3-12800E-11, ECC)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM SATA HDD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 13.0.0.133 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Acer Incorporated

Acer AR320 F2 (Intel Xeon E3-1220 v2)

SPECint_rate2006 = 156

SPECint_rate_base2006 = 150

CPU2006 license: 97
Test sponsor: Acer Incorporated
Tested by: Acer Incorporated

Test date: May-2013
Hardware Availability: Jan-2012
Software Availability: Feb-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	343	114	**345**	**113**	346	113	4	**284**	**137**	285	137	284	137
401.bzip2	4	**495**	**78.0**	492	78.5	496	77.9	4	**470**	**82.2**	471	81.9	468	82.5
403.gcc	4	**269**	**120**	269	120	269	120	4	274	118	**274**	**118**	271	119
429.mcf	4	158	231	**157**	**233**	156	234	4	158	231	**157**	**233**	156	234
445.gobmk	4	427	98.3	**428**	**98.1**	428	98.1	4	416	101	416	101	**416**	**101**
456.hmmer	4	**189**	**198**	188	198	190	197	4	**177**	**211**	176	212	179	208
458.sjeng	4	459	106	**458**	**106**	457	106	4	452	107	**449**	**108**	448	108
462.libquantum	4	82.1	1010	**82.0**	**1010**	81.8	1010	4	82.1	1010	**82.0**	**1010**	81.8	1010
464.h264ref	4	433	205	**434**	**204**	434	204	4	410	216	**412**	**215**	413	214
471.omnetpp	4	296	84.5	**297**	**84.3**	297	84.2	4	**281**	**89.0**	281	89.0	279	89.5
473.astar	4	**332**	**84.5**	332	84.5	330	85.0	4	**332**	**84.5**	332	84.5	330	85.0
483.xalancbmk	4	**157**	**176**	155	178	157	176	4	**157**	**176**	155	178	157	176

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /usr/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Tue May 14 07:11:45 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E3-1220 V2 @ 3.10GHz
      1 "physical id"s (chips)
      4 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 4
      siblings  : 4
```

Continued on next page

Platform Notes (Continued)

```
        physical 0: cores 0 1 2 3
     cache size : 8192 KB

  From /proc/meminfo
     MemTotal:       16299216 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.4 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
     EST 2013 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 May 14 07:11

  SPEC is set to: /usr/cpu2006
     Filesystem     Type    Size  Used Avail Use% Mounted on
     /dev/mapper/VolGroup-lv_root
                    ext4    434G   12G  401G   3% /

  Additional information from dmidecode:
    BIOS Acer P10 11/23/2012
    Memory:
     2x   8 GB
     2x Kingston ACR1GX72D3E16C11G 8 GB 1600 MHz 2 rank
     2x [Empty] [Empty]

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/usr/cpu2006/libs/32:/usr/cpu2006/libs/64:/usr/cpu2006/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RHEL5.5
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.2-revA.20130423.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Acer-Platform-Settings-V1.2-revA.20130423.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:54:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 June 2013.