SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110e-1E (Intel Pentium G2020)

SPECint®2006 = 39.8

SPECint_base2006 = 37.7

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: May-2013
Hardware Availability: Apr-2013
Software Availability: Feb-2012

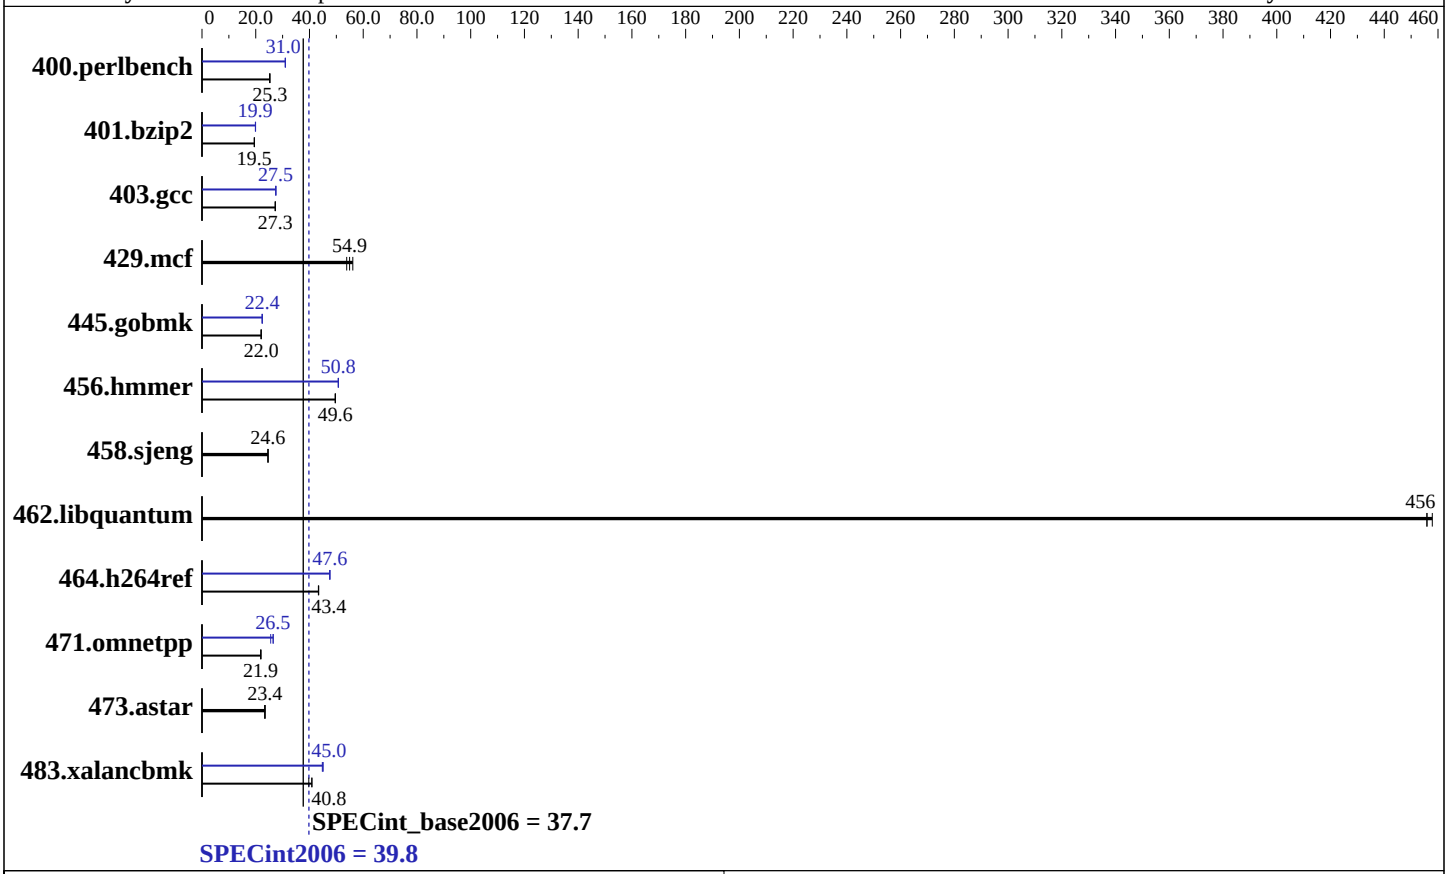

Hardware

CPU Name:	Intel Pentium G2020
CPU Characteristics:	
CPU MHz:	2900
FPU:	Integrated
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip
CPU(s) orderable:	1 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	3 MB I+D on chip per chip
Other Cache:	None
Memory:	16 GB (2 x 8 GB 2Rx8 PC3L-12800E-11, ECC, running at 1333 MHz and CL9)
Disk Subsystem:	1 x 500 GB SATA, 7200 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.2 (Santiago) Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 12.1.3.293 of Intel C++ Studio XE for Linux;
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V8.1

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/R110e-1E (Intel Pentium G2020)

SPECint2006 = 39.8

SPECint_base2006 = 37.7

CPU2006 license: 9006
Test sponsor: NEC Corporation
Tested by: NEC Corporation

Test date: May-2013
Hardware Availability: Apr-2013
Software Availability: Feb-2012

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	**387**	**25.3**	388	25.2	387	25.3	**315**	**31.0**	315	31.0	315	31.0
401.bzip2	**494**	**19.5**	494	19.5	497	19.4	**485**	**19.9**	486	19.9	484	19.9
403.gcc	295	27.3	**295**	**27.3**	295	27.3	293	27.5	293	27.5	**293**	**27.5**
429.mcf	**166**	**54.9**	169	53.9	162	56.1	**166**	**54.9**	169	53.9	162	56.1
445.gobmk	476	22.0	**476**	**22.0**	476	22.0	468	22.4	**468**	**22.4**	468	22.4
456.hmmer	188	49.7	188	49.6	**188**	**49.6**	**184**	**50.8**	184	50.8	184	50.7
458.sjeng	492	24.6	493	24.6	**492**	**24.6**	492	24.6	493	24.6	**492**	**24.6**
462.libquantum	45.3	458	45.5	456	**45.4**	**456**	45.3	458	45.5	456	**45.4**	**456**
464.h264ref	510	43.4	511	43.3	**510**	**43.4**	465	47.6	465	47.6	**465**	**47.6**
471.omnetpp	284	22.0	287	21.8	**286**	**21.9**	**236**	**26.5**	244	25.6	236	26.5
473.astar	298	23.5	**300**	**23.4**	301	23.3	298	23.5	**300**	**23.4**	301	23.3
483.xalancbmk	174	39.7	**169**	**40.8**	168	41.0	**153**	**45.0**	153	45.1	154	44.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Default BIOS settings were used.
```

General Notes

```
Environment variables set by runspec before the start of the run:
KMP_AFFINITY = "granularity=fine,scatter"
LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64"
OMP_NUM_THREADS = "2"

 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc  -m64
```

C++ benchmarks:

```
icpc -m64
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32`
`-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib64 -lsmartheap64`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div -prof-use(pass 2) -auto-ilp32
-opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32
-ansi-alias

458.sjeng: basepeak = yes

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-ra-region-strategy=block -ansi-alias
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

Continued on next page

Peak Optimization Flags (Continued)

473.astar: `basepeak = yes`

483.xalancbmk: `-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html`
`http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml`
`http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:51:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 18 June 2013.