SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL685c G7
(2.60 GHz, AMD Opteron 6344)

SPECint®_rate2006 = 902

SPECint_rate_base2006 = 791

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jul-2013
Hardware Availability: Nov-2012
Software Availability: Feb-2013

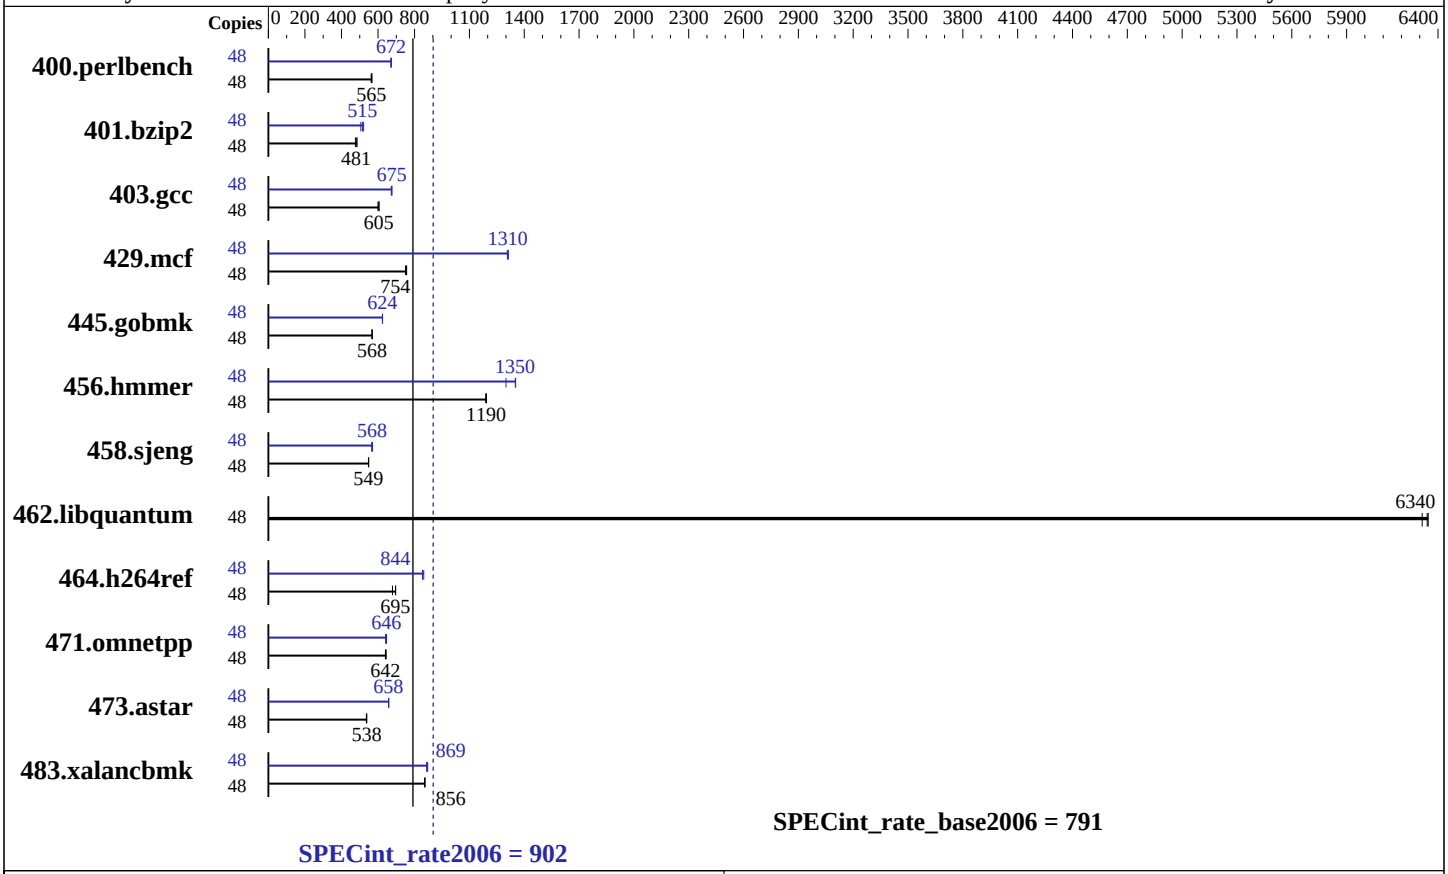

Hardware

CPU Name:	AMD Opteron 6344
CPU Characteristics:	AMD Turbo CORE technology up to 3.20 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	48 cores, 4 chips, 12 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	384 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	16 MB I+D on chip per chip, 8 MB shared / 6 cores
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 300 GB 10 K SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-220.el6.x86_64
Compiler:	C/C++: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 10.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL685c G7
(2.60 GHz, AMD Opteron 6344)

SPECint_rate2006 = 902

SPECint_rate_base2006 = 791

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Jul-2013
Hardware Availability: Nov-2012
Software Availability: Feb-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	828	567	**830**	**565**	834	562	48	**698**	**672**	697	673	700	670
401.bzip2	48	**963**	**481**	972	476	954	485	48	889	521	916	506	**900**	**515**
403.gcc	48	**639**	**605**	644	600	639	605	48	**572**	**675**	572	676	575	672
429.mcf	48	**580**	**754**	584	750	579	757	48	335	1310	333	1310	**334**	**1310**
445.gobmk	48	887	567	887	568	**887**	**568**	48	806	625	807	624	**807**	**624**
456.hmmer	48	**376**	**1190**	376	1190	375	1190	48	344	1300	**331**	**1350**	331	1350
458.sjeng	48	1061	548	1059	549	**1059**	**549**	48	1020	569	**1022**	**568**	1027	565
462.libquantum	48	**157**	**6340**	158	6310	157	6350	48	**157**	**6340**	158	6310	157	6350
464.h264ref	48	1525	697	1564	679	**1527**	**695**	48	**1259**	**844**	1249	850	1259	843
471.omnetpp	48	**468**	**642**	469	640	465	645	48	**465**	**646**	468	641	464	646
473.astar	48	**626**	**538**	626	538	628	536	48	**512**	**658**	512	659	512	658
483.xalancbmk	48	388	854	**387**	**856**	386	857	48	**381**	**869**	380	872	382	866

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=43008 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/cpu2006/amd1206-rate-libs-revA/32:/cpu2006/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1

C++ benchmarks:
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
-CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
-GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
-m32 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
-CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
-m32 -HP:bdt=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:unroll_size=256 -OPT:unroll_times_max=8
-OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
-IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
-HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -OPT:alias=disjoint
-OPT:unroll_times_max=16 -OPT:unroll_size=512
-OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
-CG:cmp_peep=on -CG:pre_local_sched=off -HP:bdt=2m:heap=2m
-CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off -CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2 -HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1`

462.libquantum: `basepeak = yes`

464.h264ref: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3 -OPT:unroll_size=256 -OPT:unroll_times_max=2 -IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0 -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m -march=bdver1`

C++ benchmarks:

471.omnetpp: `-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -WOPT:sib=on -D__OPEN64_FAST_SET -march=bdver2 -mno-fma4 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap`

473.astar: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast -WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on -CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on -OPT:alias=disjoint -INLINE:aggressive=on -IPA:small_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m -march=bdver1`

483.xalancbmk: `-Ofast -LNO:prefetch=2 -OPT:unroll_size=512 -OPT:unroll_times_max=8 -D__OPEN64_FAST_SET -INLINE:aggressive=on -m32 -CG:cmp_peep=on -CG:local_sched=off -CG:p2align=1 -GRA:unspill=on -TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2 -mno-fma4 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.html
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-A.20130327.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-II.xml
http://www.spec.org/cpu2006/flags/HP-Platform-Flags-AMD-V1.2-A.20130327.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 16:35:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 30 July 2013.