SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

I620-G15 (Intel Xeon E5-2670, 2.60GHz)

SPECint®_rate2006 = 654

SPECint_rate_base2006 = 632

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Aug-2013
Hardware Availability: Jul-2013
Software Availability: Jul-2013

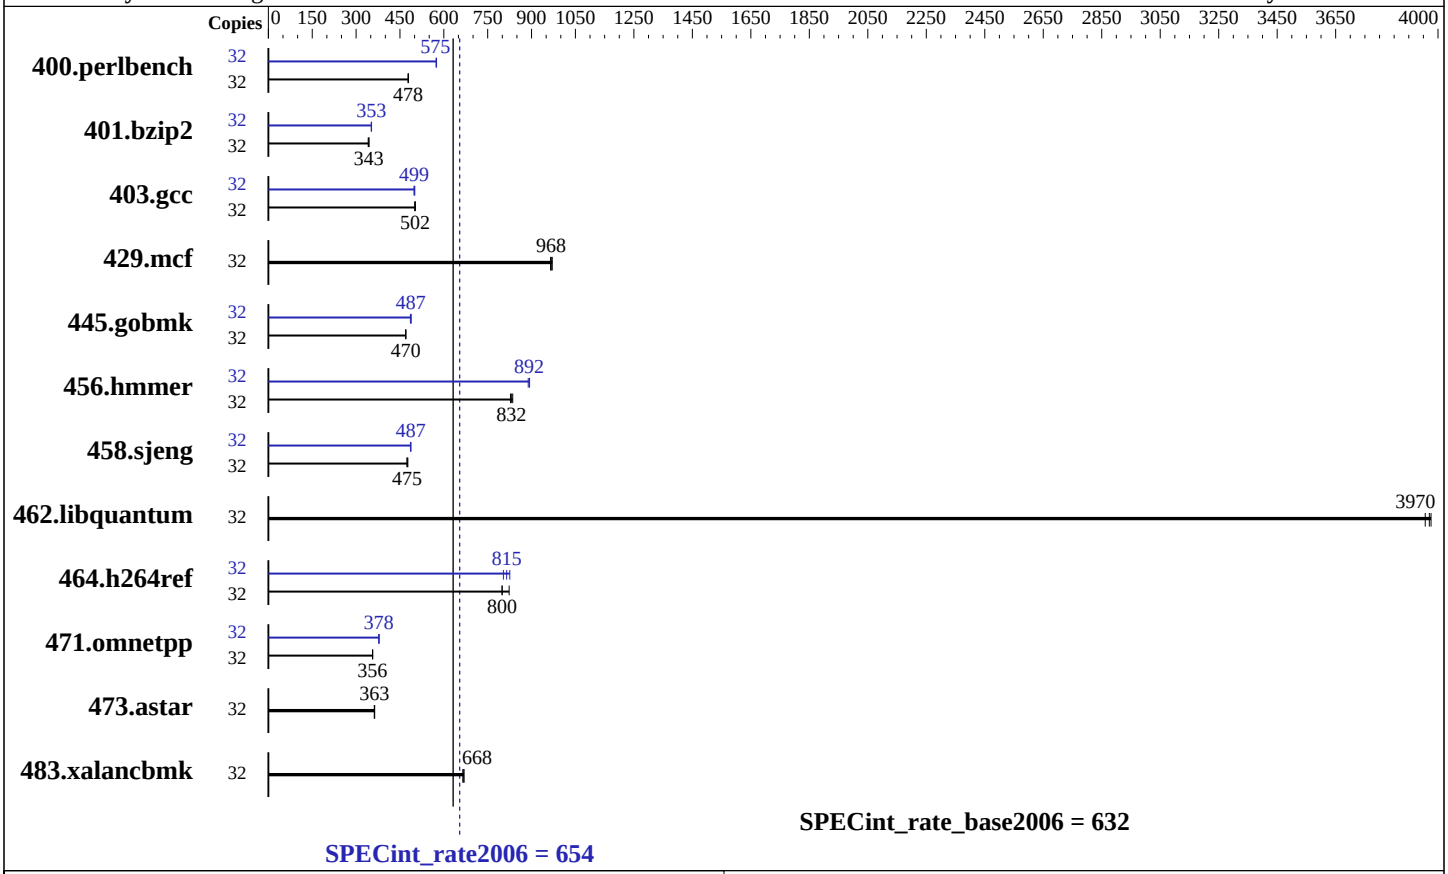

Hardware

CPU Name:	Intel Xeon E5-2670
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2600
FPU:	Integrated
CPU(s) enabled:	16 cores, 2 chips, 8 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	20 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-12800R-9, ECC)
Disk Subsystem:	5 x 300 GB SAS, 10000RPM, RAID 5
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 SP3 (x86_64) 3.0.76-0.11-default
Compiler:	C/C++: Version 13.0.0.133 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

I620-G15 (Intel Xeon E5-2670, 2.60GHz)

SPECint_rate2006 = 654

SPECint_rate_base2006 = 632

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon

Test date: Aug-2013
Hardware Availability: Jul-2013
Software Availability: Jul-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	32	**654**	**478**	654	478	652	479	32	544	575	545	574	**544**	**575**
401.bzip2	32	897	344	905	341	**900**	**343**	32	**876**	**353**	878	352	875	353
403.gcc	32	515	501	513	503	**513**	**502**	32	514	501	**516**	**499**	517	498
429.mcf	32	302	965	**302**	**968**	301	971	32	302	965	**302**	**968**	301	971
445.gobmk	32	**715**	**470**	715	469	714	470	32	**689**	**487**	688	488	691	486
456.hmmer	32	357	836	361	828	**359**	**832**	32	336	889	334	893	**335**	**892**
458.sjeng	32	817	474	812	477	**816**	**475**	32	795	487	797	486	**795**	**487**
462.libquantum	32	**167**	**3970**	168	3960	167	3980	32	**167**	**3970**	168	3960	167	3980
464.h264ref	32	860	823	886	799	**886**	**800**	32	**869**	**815**	881	804	858	826
471.omnetpp	32	560	357	**561**	**356**	561	356	32	528	379	**529**	**378**	530	377
473.astar	32	620	362	**620**	**363**	618	364	32	620	362	**620**	**363**	618	364
483.xalancbmk	32	332	665	330	669	**330**	**668**	32	332	665	330	669	**330**	**668**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /root/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on bogon Mon Aug  5 10:45:37 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2670 0 @ 2.60GHz
      2 "physical id"s (chips)
      32 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 8
      siblings  : 16
```

Continued on next page

Platform Notes (Continued)

```
        physical 0: cores 0 1 2 3 4 5 6 7
        physical 1: cores 0 1 2 3 4 5 6 7
     cache size : 20480 KB

  From /proc/meminfo
     MemTotal:       132137232 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 11 (x86_64)

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 11 (x86_64)
        VERSION = 11
        PATCHLEVEL = 3

  uname -a:
     Linux bogon 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
     x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Jul 30 16:09 last=S

  SPEC is set to: /root/cpu2006
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda2      ext3 1008G   71G  887G   8% /

  Additional information from dmidecode:
    BIOS American Megatrends Inc. V7.108 All Item 07/25/2013
    Memory:
     16x   8 GB
     16x Hynix Semiconductor HMT31GR7CFR4C-PB 8 GB 1600 MHz

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/root/cpu2006/libs/32:/root/cpu2006/libs/64:/root/cpu2006/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RHEL5.5
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 16:44:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 27 August 2013.