



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

**SPECint®\_rate2006 = 1130**

Huawei E9000 CH242 (Intel Xeon E7-4870)

**SPECint\_rate\_base2006 = 1080**

CPU2006 license: 3175


Test date: Aug-2013

Test sponsor: Huawei

Hardware Availability: Aug-2013

Tested by: Huawei

Software Availability: Feb-2013

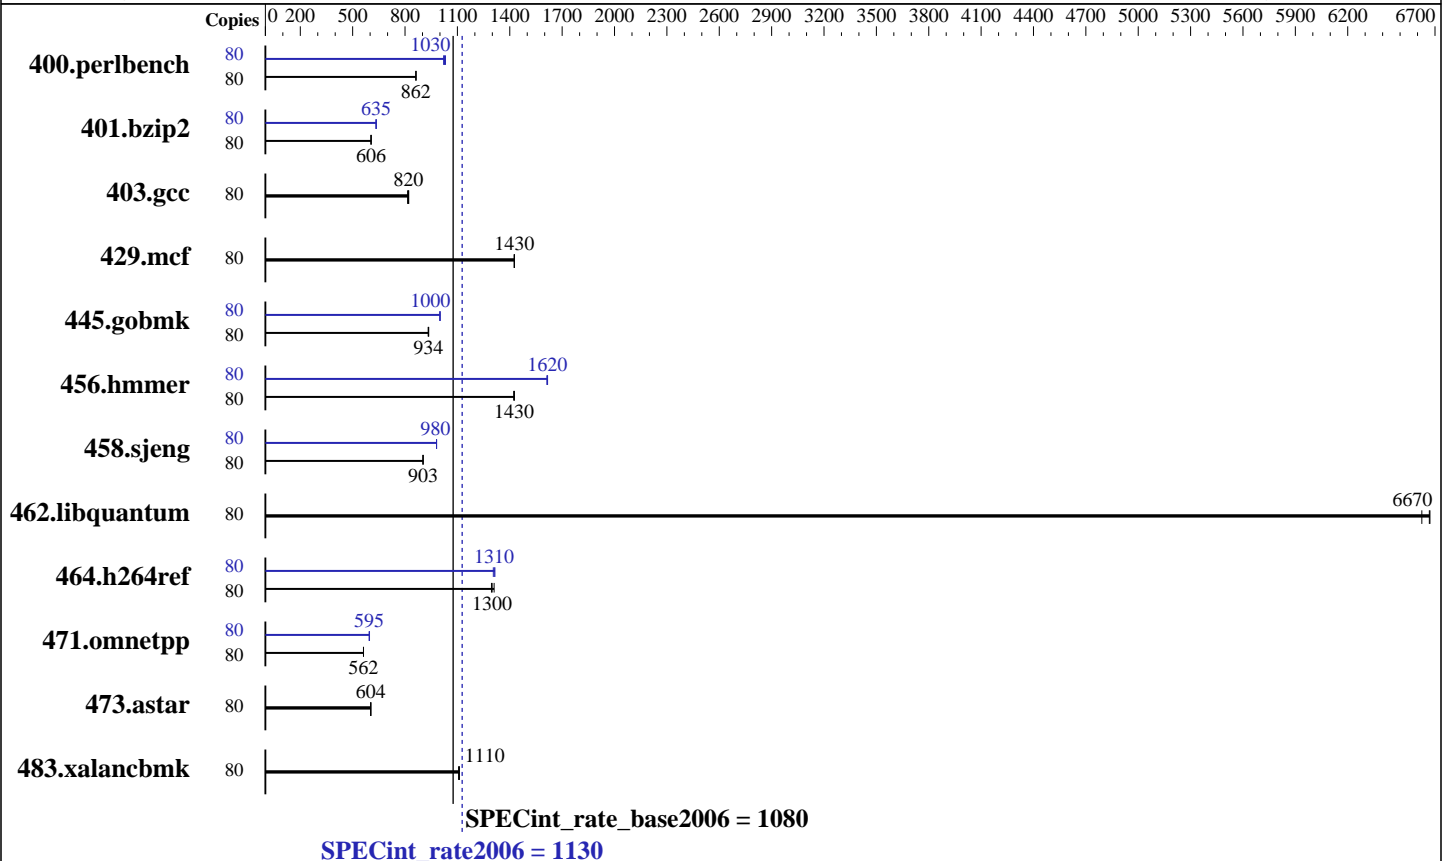

### Hardware

CPU Name: Intel Xeon E7-4870  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.80 GHz  
 CPU MHz: 2400  
 FPU: Integrated  
 CPU(s) enabled: 40 cores, 4 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 256 GB (32 x 8 GB 2Rx4 PC3L-12800R-11, ECC)  
 Disk Subsystem: 1 x 300 GB SAS, 10K RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 13.1.1.163 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V9.01



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECint\_rate2006 = 1130

Huawei E9000 CH242 (Intel Xeon E7-4870)

SPECint\_rate\_base2006 = 1080

CPU2006 license: 3175

Test date: Aug-2013

Test sponsor: Huawei

Hardware Availability: Aug-2013

Tested by: Huawei

Software Availability: Feb-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	80	907	862	906	863	<b>906</b>	<b>862</b>	80	<b>762</b>	<b>1030</b>	758	1030	766	1020
401.bzip2	80	1274	606	1277	604	<b>1274</b>	<b>606</b>	80	1215	635	1219	633	<b>1216</b>	<b>635</b>
403.gcc	80	<b>786</b>	<b>820</b>	791	815	784	821	80	<b>786</b>	<b>820</b>	791	815	784	821
429.mcf	80	512	1430	511	1430	<b>512</b>	<b>1430</b>	80	512	1430	511	1430	<b>512</b>	<b>1430</b>
445.gobmk	80	897	936	900	932	<b>898</b>	<b>934</b>	80	838	1000	<b>839</b>	<b>1000</b>	840	999
456.hammer	80	<b>524</b>	<b>1430</b>	523	1430	525	1420	80	463	1610	462	1620	<b>462</b>	<b>1620</b>
458.sjeng	80	<b>1072</b>	<b>903</b>	1071	904	1072	903	80	<b>987</b>	<b>980</b>	987	981	987	980
462.libquantum	80	<b>249</b>	<b>6670</b>	248	6670	250	6620	80	<b>249</b>	<b>6670</b>	248	6670	250	6620
464.h264ref	80	1351	1310	1367	1300	<b>1363</b>	<b>1300</b>	80	<b>1350</b>	<b>1310</b>	1356	1310	1346	1310
471.omnetpp	80	<b>890</b>	<b>562</b>	889	562	890	562	80	<b>840</b>	<b>595</b>	840	595	838	596
473.astar	80	<b>930</b>	<b>604</b>	930	604	930	604	80	<b>930</b>	<b>604</b>	930	604	930	604
483.xalancbmk	80	<b>497</b>	<b>1110</b>	497	1110	499	1110	80	<b>497</b>	<b>1110</b>	497	1110	499	1110

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:

Power Management = Maximum Performance (Default = Active Power Controller)

Baseboard Management Controller used to adjust the fan speed to 100%

Sysinfo program /spec/config/sysinfo.rev6800

\$Rev: 6800 \$ \$Date:: 2011-10-11 # \$ 6f2ebdff5032aaa42e583f96b07f99d3

running on spec Wed Aug 7 10:32:21 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7- 4870 @ 2.40GHz

4 "physical id"s (chips)

80 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1130

Huawei E9000 CH242 (Intel Xeon E7-4870)

SPECint\_rate\_base2006 = 1080

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2013

Hardware Availability: Aug-2013

Software Availability: Feb-2013

## Platform Notes (Continued)

```

caution.)
  cpu cores : 10
  siblings  : 20
  physical 0: cores 0 1 2 8 9 16 17 18 24 25
  physical 1: cores 0 1 2 8 9 16 17 18 24 25
  physical 2: cores 0 1 2 8 9 16 17 18 24 25
  physical 3: cores 0 1 2 8 9 16 17 18 24 25
cache size : 30720 KB

```

```

From /proc/meminfo
MemTotal:      264358860 kB
HugePages_Total:    0
Hugepagesize:    2048 kB

```

```

/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.4 (Santiago)

```

```

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

```

```

uname -a:
Linux spec 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64
x86_64 x86_64 GNU/Linux

```

run-level 3 Aug 7 10:15

```

SPEC is set to: /spec
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sdal       ext4      250G  21G  217G   9% /

```

Additional information from dmidecode:

```

Memory:
32x RAMAXEL RMS6031EC64FAF1333 8 GB 1067 MHz 2 rank

```

(End of data from sysinfo program)

## General Notes

```

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory
using RHEL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1> /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>

```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1130

Huawei E9000 CH242 (Intel Xeon E7-4870)

SPECint\_rate\_base2006 = 1080

CPU2006 license: 3175

Test date: Aug-2013

Test sponsor: Huawei

Hardware Availability: Aug-2013

Tested by: Huawei

Software Availability: Feb-2013

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/opt/cpu2006/smartheap -lsmartheap  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1130

Huawei E9000 CH242 (Intel Xeon E7-4870)

SPECint\_rate\_base2006 = 1080

CPU2006 license: 3175

Test date: Aug-2013

Test sponsor: Huawei

Hardware Availability: Aug-2013

Tested by: Huawei

Software Availability: Feb-2013

## Peak Compiler Invocation (Continued)

C++ benchmarks:  
icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-auto-ilp32  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32 -ansi-alias  
403.gcc: basepeak = yes  
429.mcf: basepeak = yes  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias -opt-mem-layout-trans=3  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32  
-B /usr/share/libhugetlbfs/ -Wl,-hugetlbfs-link=BDT  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll4 -auto-ilp32  
462.libquantum: basepeak = yes  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias

C++ benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECint\_rate2006 = 1130

Huawei E9000 CH242 (Intel Xeon E7-4870)

SPECint\_rate\_base2006 = 1080

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: Aug-2013

Hardware Availability: Aug-2013

Software Availability: Feb-2013

## Peak Optimization Flags (Continued)

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/opt/cpu2006/smartheap -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 15:58:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 24 September 2013.