SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH242 (Intel Xeon E7-4870)

SPECint®2006 = 41.2

SPECint_base2006 = 38.1

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Aug-2013
Hardware Availability: Aug-2013
Software Availability: Feb-2013

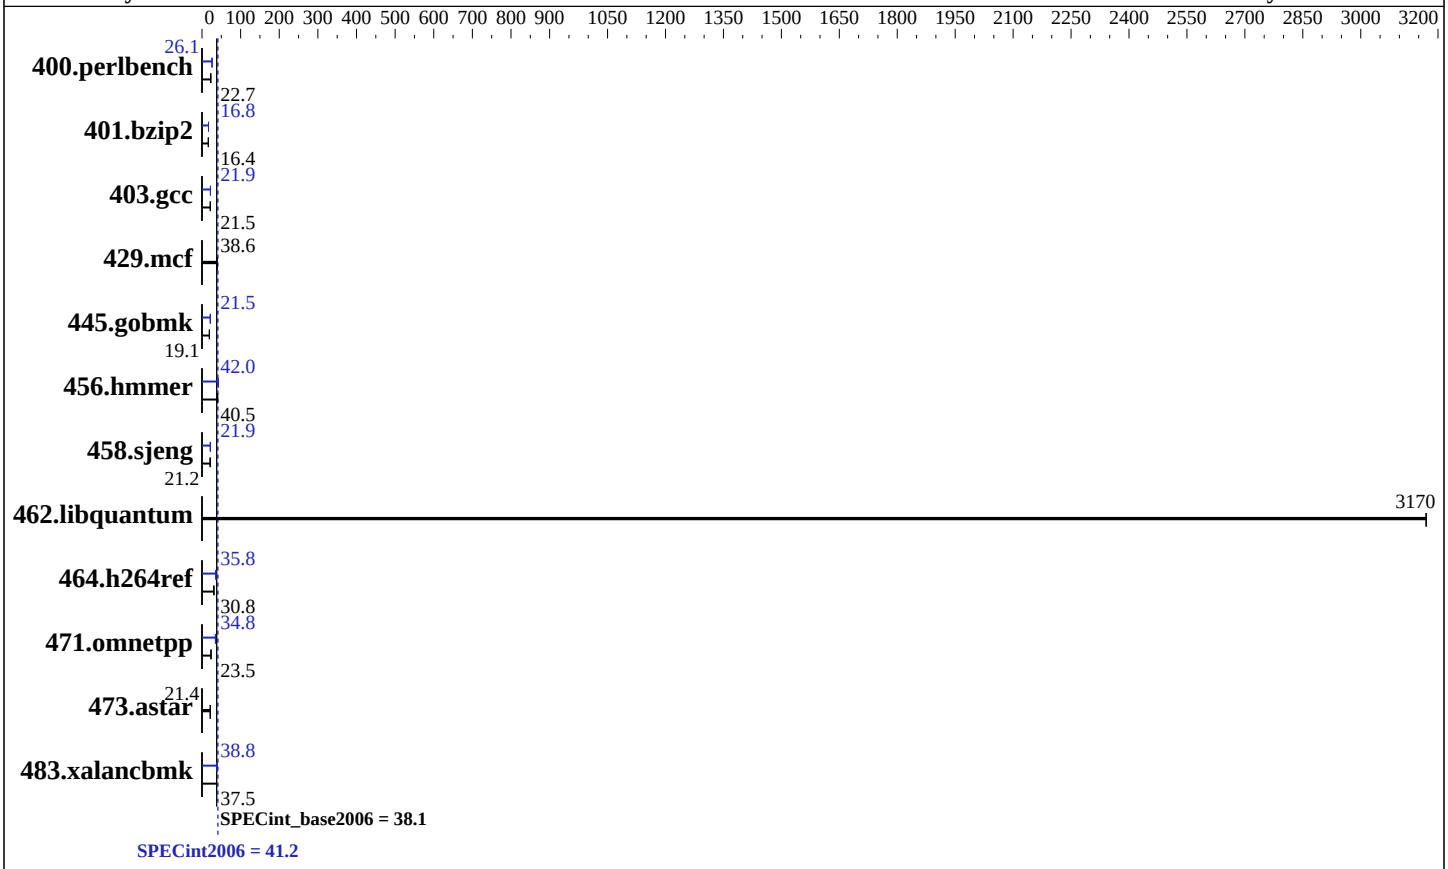

Hardware

CPU Name:	Intel Xeon E7-4870
CPU Characteristics:	Intel Turbo Boost Technology up to 2.80 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	40 cores, 4 chips, 10 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3L-12800R-11, ECC)
Disk Subsystem:	1 x 300 GB SAS, 10K RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 13.1.1.163 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei E9000 CH242 (Intel Xeon E7-4870)

SPECint2006 = 41.2

SPECint_base2006 = 38.1

CPU2006 license: 3175
Test sponsor: Huawei
Tested by: Huawei

Test date: Aug-2013
Hardware Availability: Aug-2013
Software Availability: Feb-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	431	22.7	430	22.7	**430**	**22.7**	**375**	**26.1**	374	26.1	375	26.1
401.bzip2	588	16.4	**588**	**16.4**	588	16.4	573	16.8	**574**	**16.8**	575	16.8
403.gcc	373	21.6	**374**	**21.5**	375	21.5	367	21.9	369	21.8	**368**	**21.9**
429.mcf	**236**	**38.6**	234	38.9	237	38.5	**236**	**38.6**	234	38.9	237	38.5
445.gobmk	**549**	**19.1**	550	19.1	549	19.1	487	21.5	**487**	**21.5**	487	21.5
456.hmmer	**230**	**40.5**	229	40.7	234	39.8	221	42.2	**222**	**42.0**	222	41.9
458.sjeng	571	21.2	571	21.2	**571**	**21.2**	**553**	**21.9**	572	21.1	553	21.9
462.libquantum	6.54	3170	6.54	3170	**6.54**	**3170**	6.54	3170	6.54	3170	**6.54**	**3170**
464.h264ref	**719**	**30.8**	718	30.8	719	30.8	618	35.8	**619**	**35.8**	619	35.8
471.omnetpp	**266**	**23.5**	272	23.0	266	23.5	**180**	**34.8**	180	34.7	179	35.0
473.astar	329	21.3	**328**	**21.4**	327	21.5	329	21.3	**328**	**21.4**	327	21.5
483.xalancbmk	184	37.5	183	37.7	**184**	**37.5**	**178**	**38.8**	178	38.8	177	38.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)
Intel Hyper-Threading set to Disabled
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec/config/sysinfo.rev6800
$Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
running on spec Sat Aug 10 22:22:22 2013

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7- 4870 @ 2.40GHz
      4 "physical id"s (chips)
      40 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 10
      physical 0: cores 0 1 2 8 9 16 17 18 24 25
      physical 1: cores 0 1 2 8 9 16 17 18 24 25
```

Continued on next page

Platform Notes (Continued)

```
        physical 2: cores 0 1 2 8 9 16 17 18 24 25
        physical 3: cores 0 1 2 8 9 16 17 18 24 25
     cache size : 30720 KB

  From /proc/meminfo
     MemTotal:       264363996 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.4 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux spec 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013 x86_64
     x86_64 x86_64 GNU/Linux

  run-level 3 Aug 10 22:19

  SPEC is set to: /spec
     Filesystem     Type    Size  Used Avail Use% Mounted on
     /dev/sda1      ext4    250G   21G  217G   9% /

  Additional information from dmidecode:
    Memory:
     32x RAMAXEL RMS6031EC64FAF1333 8 GB 1067 MHz 2 rank

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
  Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory
  using RHEL 6.4
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/opt/cpu2006/smartheap -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m64
```

Continued on next page

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2)
`-opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2)
`-O3`(pass 2) `-no-prec-div -prof-use`(pass 2) `-auto-ilp32`
`-opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc`
`-opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-prof-use`(pass 2)
`-ansi-alias`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`
`-ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/opt/cpu2006/smartheap -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/opt/cpu2006/smartheap -lsmartheap`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.html`
`http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic13-official-linux64.xml`
`http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 15:57:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 September 2013.