



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]2006 = **99.4**

ProLiant DL380p Gen8
(2.70 GHz, Intel Xeon E5-2697 v2)

SPECfp_base2006 = **94.3**

CPU2006 license: 3


Test date: Sep-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

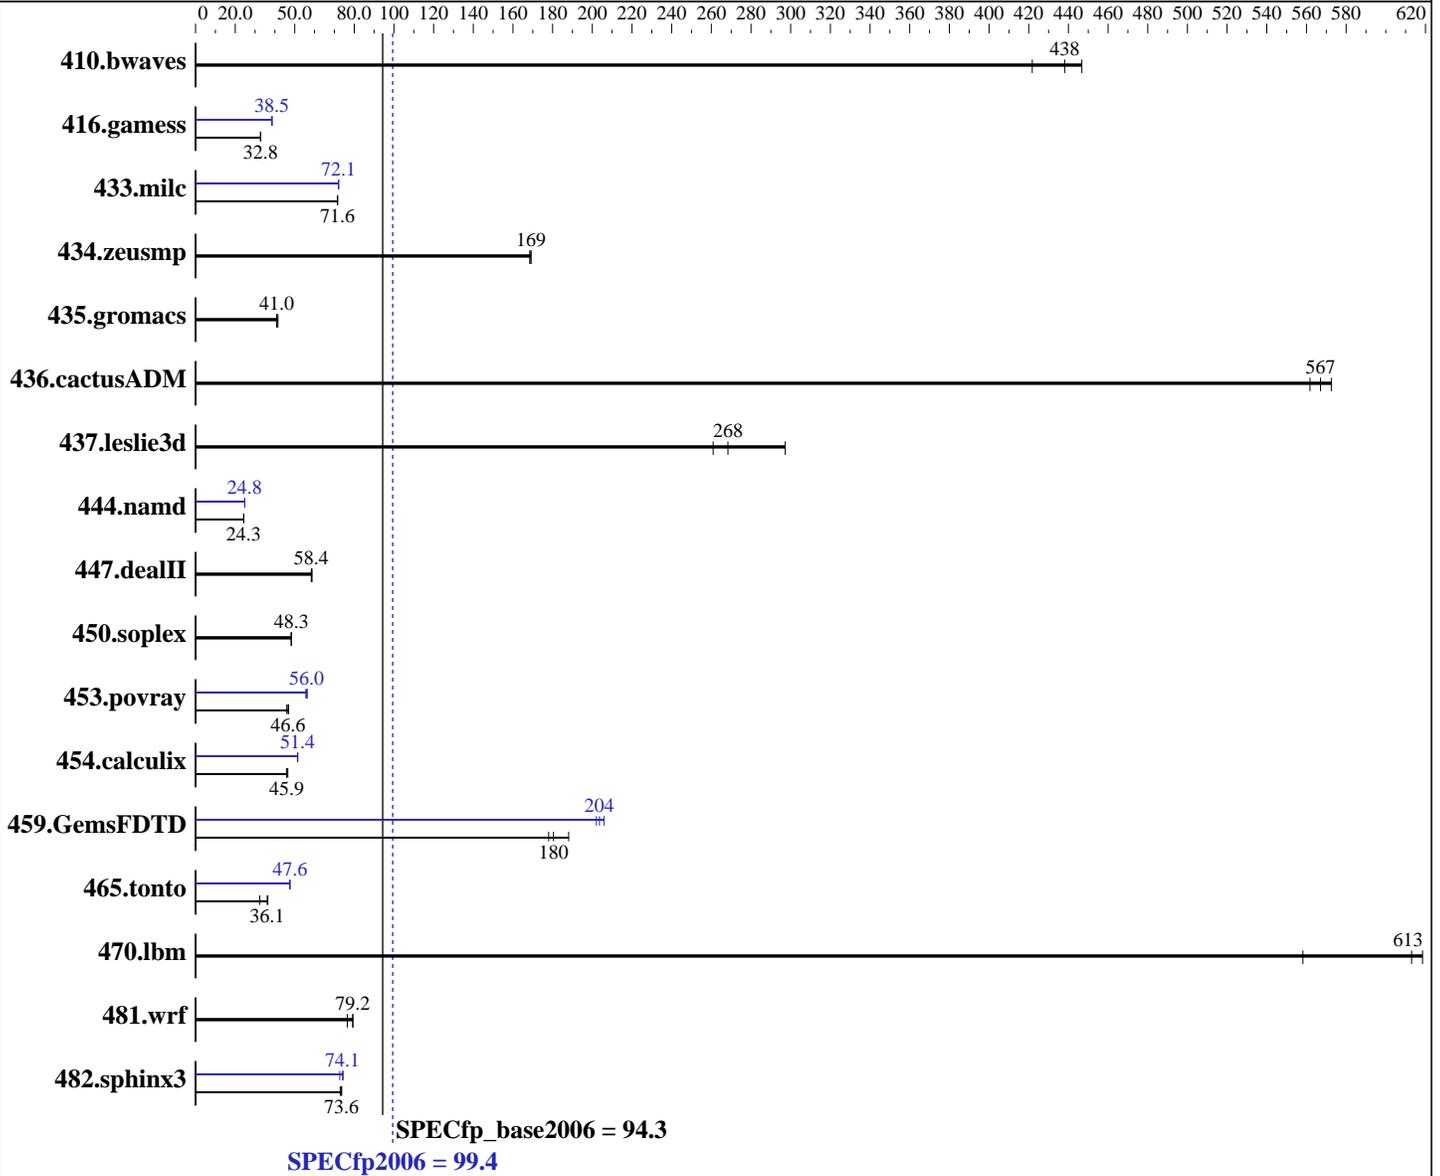

Hardware

CPU Name: Intel Xeon E5-2697 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.50 GHz
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 24 cores, 2 chips, 12 cores/chip
 CPU(s) orderable: 1,2 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 SP3 (x86_64)
 Kernel version 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext3
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = **99.4**

ProLiant DL380p Gen8
(2.70 GHz, Intel Xeon E5-2697 v2)

SPECfp_base2006 = **94.3**

CPU2006 license: 3

Test date: Sep-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

L3 Cache: 30 MB I+D on chip per chip
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem: 1 x 146 GB 15 K SAS, RAID 0
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<u>31.0</u>	<u>438</u>	30.4	447	32.2	422	<u>31.0</u>	<u>438</u>	30.4	447	32.2	422
416.gamess	<u>597</u>	<u>32.8</u>	598	32.8	597	32.8	<u>508</u>	<u>38.5</u>	508	38.5	508	38.5
433.milc	128	71.6	128	71.5	<u>128</u>	<u>71.6</u>	127	72.1	<u>127</u>	<u>72.1</u>	127	72.1
434.zeusmp	<u>53.8</u>	<u>169</u>	53.8	169	54.0	168	<u>53.8</u>	<u>169</u>	53.8	169	54.0	168
435.gromacs	172	41.5	<u>174</u>	<u>41.0</u>	175	40.9	172	41.5	<u>174</u>	<u>41.0</u>	175	40.9
436.cactusADM	21.3	562	20.9	573	<u>21.1</u>	<u>567</u>	21.3	562	20.9	573	<u>21.1</u>	<u>567</u>
437.leslie3d	36.0	261	31.6	297	<u>35.0</u>	<u>268</u>	36.0	261	31.6	297	<u>35.0</u>	<u>268</u>
444.namd	<u>330</u>	<u>24.3</u>	330	24.3	331	24.3	<u>324</u>	<u>24.8</u>	324	24.8	323	24.8
447.dealII	196	58.4	<u>196</u>	<u>58.4</u>	195	58.7	196	58.4	<u>196</u>	<u>58.4</u>	195	58.7
450.soplex	172	48.4	173	48.1	<u>173</u>	<u>48.3</u>	172	48.4	173	48.1	<u>173</u>	<u>48.3</u>
453.povray	<u>114</u>	<u>46.6</u>	116	46.0	113	46.9	95.7	55.6	<u>95.0</u>	<u>56.0</u>	94.5	56.3
454.calculix	180	45.9	177	46.5	<u>180</u>	<u>45.9</u>	<u>160</u>	<u>51.4</u>	161	51.4	160	51.6
459.GemsFDTD	59.6	178	56.4	188	<u>58.8</u>	<u>180</u>	51.5	206	<u>52.1</u>	<u>204</u>	52.5	202
465.tonto	<u>273</u>	<u>36.1</u>	270	36.5	304	32.4	207	47.5	207	47.6	<u>207</u>	<u>47.6</u>
470.lbm	24.6	558	22.2	619	<u>22.4</u>	<u>613</u>	24.6	558	22.2	619	<u>22.4</u>	<u>613</u>
481.wrf	<u>141</u>	<u>79.2</u>	141	79.3	146	76.5	<u>141</u>	<u>79.2</u>	141	79.3	146	76.5
482.sphinx3	<u>265</u>	<u>73.6</u>	265	73.6	267	72.9	<u>263</u>	<u>74.1</u>	268	72.7	262	74.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Reclaim mode enabled with:
  echo 1 > /proc/sys/vm/zone_reclaim_mode
Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/transparent_hugepage/enabled
Filesystem page cache cleared with:
  echo 1 > /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
  numactl --localalloc runspec <etc>
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 99.4

ProLiant DL380p Gen8
(2.70 GHz, Intel Xeon E5-2697 v2)

SPECfp_base2006 = 94.3

CPU2006 license: 3

Test date: Sep-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Platform Notes

BIOS Configuration:

```

Intel Hyperthreading Options set to Disabled
HP Power Profile set to Maximum Performance
Minimum Processor Idle Power Core State set to C1E state
Minimum Processor Idle Power Package State set to Package C6 (retention) State
Energy/Performance Bias is set to Maximum Performance
Memory Power Savings Mode set to Maximum Performance
Thermal Configuration set to Maximum Cooling
Collaborative Power Control set to Disabled
Dynamic Power Capping Functionality set to Disabled
Processor Power and Utilization Monitoring set to Disabled
Memory Refresh Rate set to 1x

```

Sysinfo program /cpu2006/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191

running on dl380p-gen8-0s9 Sun Sep 15 17:28:21 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

```

model name      : Intel(R) Xeon(R) CPU E5-2697 v2 @ 2.70GHz
 2 "physical id"s (chips)
 24 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores     : 12
  siblings      : 12
  physical 0:   cores 0 1 2 3 4 5 8 9 10 11 12 13
  physical 1:   cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size     : 30720 KB

```

From /proc/meminfo

```

MemTotal:      132130192 kB
HugePages_Total: 0
Hugepagesize:   2048 kB

```

/usr/bin/lsb_release -d

SUSE Linux Enterprise Server 11 (x86_64)

From /etc/*release* /etc/*version*

```

SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3

```

uname -a:

```

Linux dl380p-gen8-0s9 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux

```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 99.4

ProLiant DL380p Gen8
(2.70 GHz, Intel Xeon E5-2697 v2)

SPECfp_base2006 = 94.3

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2013
Hardware Availability: Sep-2013
Software Availability: Sep-2013

Platform Notes (Continued)

run-level 3 Sep 15 17:24 last=S

SPEC is set to: /cpu2006

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sdal	ext3	135G	13G	121G	10%	/

Additional information from dmidecode:

BIOS HP P70 09/08/2013

Memory:

16x HP 712382-071 8 GB 1866 MHz

8x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 128 GB and the dmidecode description should read as the following:

16x HP 712382-071 8 GB 1866 MHz

Regarding the sysinfo display about the CPU cores from /proc/cpuinfo, the correct mapping should display as cores 0 through 11. The mapping should read as the following:

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11

General Notes

Environment variables set by runspec before the start of the run:

LD_LIBRARY_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

OMP_NUM_THREADS = "24"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 99.4

ProLiant DL380p Gen8
(2.70 GHz, Intel Xeon E5-2697 v2)

SPECfp_base2006 = 94.3

CPU2006 license: 3

Test date: Sep-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

Base Optimization Flags

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 99.4

ProLiant DL380p Gen8
(2.70 GHz, Intel Xeon E5-2697 v2)

SPECfp_base2006 = 94.3

CPU2006 license: 3

Test date: Sep-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 99.4

ProLiant DL380p Gen8
(2.70 GHz, Intel Xeon E5-2697 v2)

SPECfp_base2006 = 94.3

CPU2006 license: 3
Test sponsor: Hewlett-Packard Company
Tested by: Hewlett-Packard Company

Test date: Sep-2013
Hardware Availability: Sep-2013
Software Availability: Sep-2013

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revB.20131009.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 17:05:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 October 2013.