



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECint®\_rate2006 = 735

Express5800/R120e-2M (Intel Xeon E5-2660 v2)

SPECint\_rate\_base2006 = 709

CPU2006 license: 9006


Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

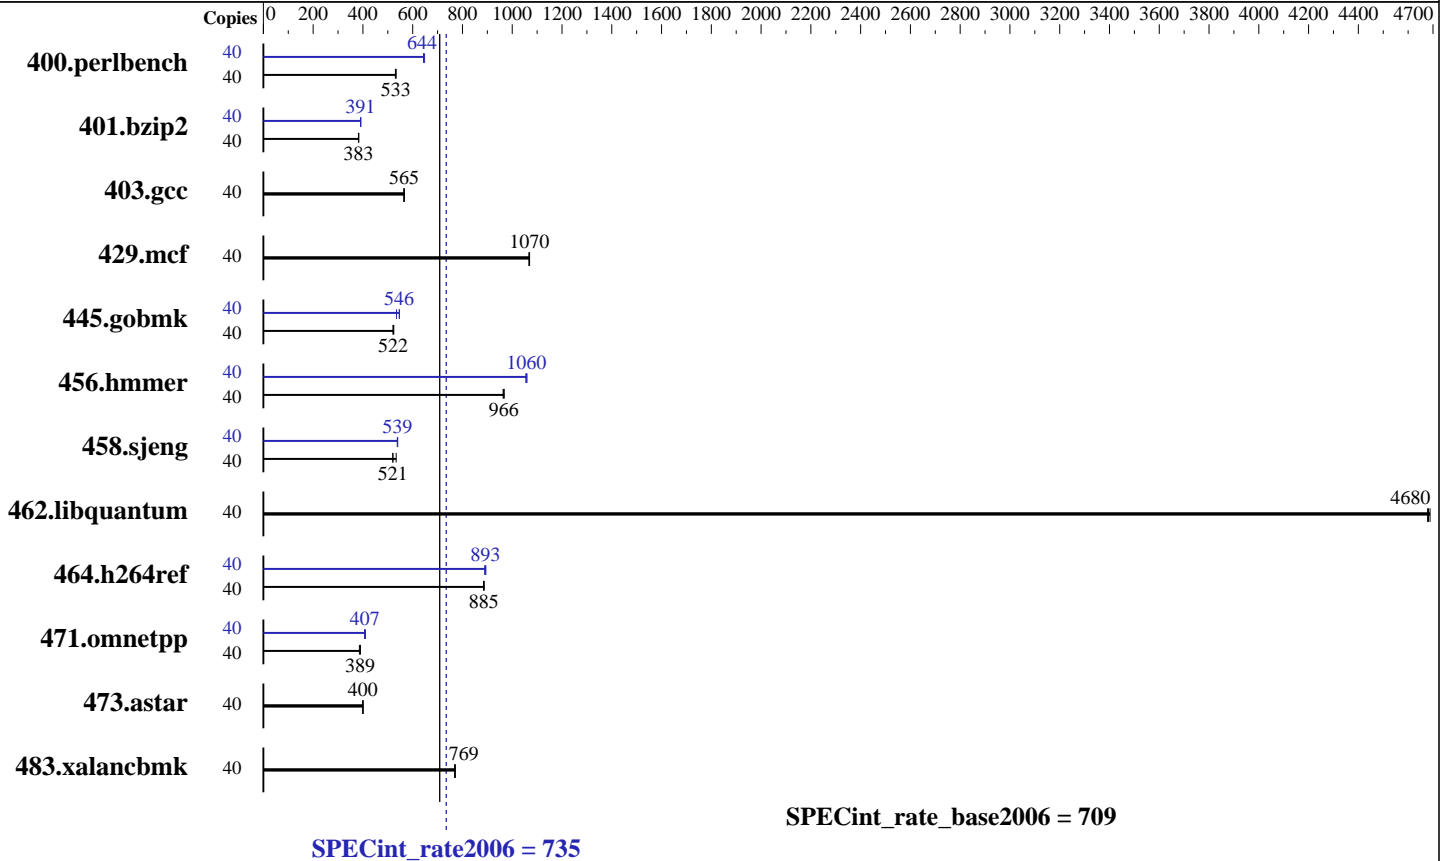

### Hardware

CPU Name: Intel Xeon E5-2660 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.00 GHz  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 20 cores, 2 chips, 10 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 25 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
 Disk Subsystem: 1 x 250 GB SATA, 7200 RPM  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 6.4 (Santiago)  
 Kernel 2.6.32-358.18.1.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

SPECint\_rate2006 = 735

Express5800/R120e-2M (Intel Xeon E5-2660 v2)

SPECint\_rate\_base2006 = 709

CPU2006 license: 9006

Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	733	533	737	531	<b>734</b>	<b>533</b>	40	603	648	<b>607</b>	<b>644</b>	607	643
401.bzip2	40	<b>1009</b>	<b>383</b>	1011	382	1007	383	40	989	390	<b>988</b>	<b>391</b>	985	392
403.gcc	40	570	565	<b>570</b>	<b>565</b>	568	566	40	570	565	<b>570</b>	<b>565</b>	568	566
429.mcf	40	<b>341</b>	<b>1070</b>	341	1070	342	1070	40	<b>341</b>	<b>1070</b>	341	1070	342	1070
445.gobmk	40	805	521	801	524	<b>804</b>	<b>522</b>	40	<b>768</b>	<b>546</b>	784	535	768	546
456.hammer	40	387	963	386	968	<b>386</b>	<b>966</b>	40	352	1060	354	1050	<b>353</b>	<b>1060</b>
458.sjeng	40	931	520	<b>930</b>	<b>521</b>	907	534	40	897	540	900	538	<b>898</b>	<b>539</b>
462.libquantum	40	177	4680	177	4690	<b>177</b>	<b>4680</b>	40	177	4680	177	4690	<b>177</b>	<b>4680</b>
464.h264ref	40	1001	885	<b>1000</b>	<b>885</b>	997	888	40	<b>992</b>	<b>893</b>	996	889	990	894
471.omnetpp	40	641	390	648	386	<b>643</b>	<b>389</b>	40	610	410	<b>614</b>	<b>407</b>	615	407
473.astar	40	<b>702</b>	<b>400</b>	703	399	701	401	40	<b>702</b>	<b>400</b>	703	399	701	401
483.xalancbmk	40	358	771	359	769	<b>359</b>	<b>769</b>	40	358	771	359	769	<b>359</b>	<b>769</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS Settings:  
Energy Performance: Performance

## General Notes

Environment variables set by runspec before the start of the run:  
LD\_LIBRARY\_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>  
The Express5800/R120e-1M and  
the Express5800/R120e-2M models are electronically equivalent.

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 735

Express5800/R120e-2M (Intel Xeon E5-2660 v2)

SPECint\_rate\_base2006 = 709

CPU2006 license: 9006

Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

## General Notes (Continued)

The results have been measured on the Express5800/R120e-2M model.

## Base Compiler Invocation

C benchmarks:

icc -m32

C++ benchmarks:

icpc -m32

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3  
-Wl,-z,muldefs -L/sh -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 735

Express5800/R120e-2M (Intel Xeon E5-2660 v2)

SPECint\_rate\_base2006 = 709

CPU2006 license: 9006

Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

## Peak Compiler Invocation (Continued)

458.sjeng: icc -m64

C++ benchmarks:

icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LINUX  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: basepeak = yes

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
 -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint\_rate2006 = 735

Express5800/R120e-2M (Intel Xeon E5-2660 v2)

SPECint\_rate\_base2006 = 709

CPU2006 license: 9006

Test date: Oct-2013

Test sponsor: NEC Corporation

Hardware Availability: Sep-2013

Tested by: NEC Corporation

Software Availability: Sep-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/NEC-Platform-Settings-V1.2-R120d-RevA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 17:56:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 3 December 2013.