



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

**SPECint®2006 = 39.2**

**SPECint\_base2006 = 37.4**

**CPU2006 license:** 9019


**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Nov-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

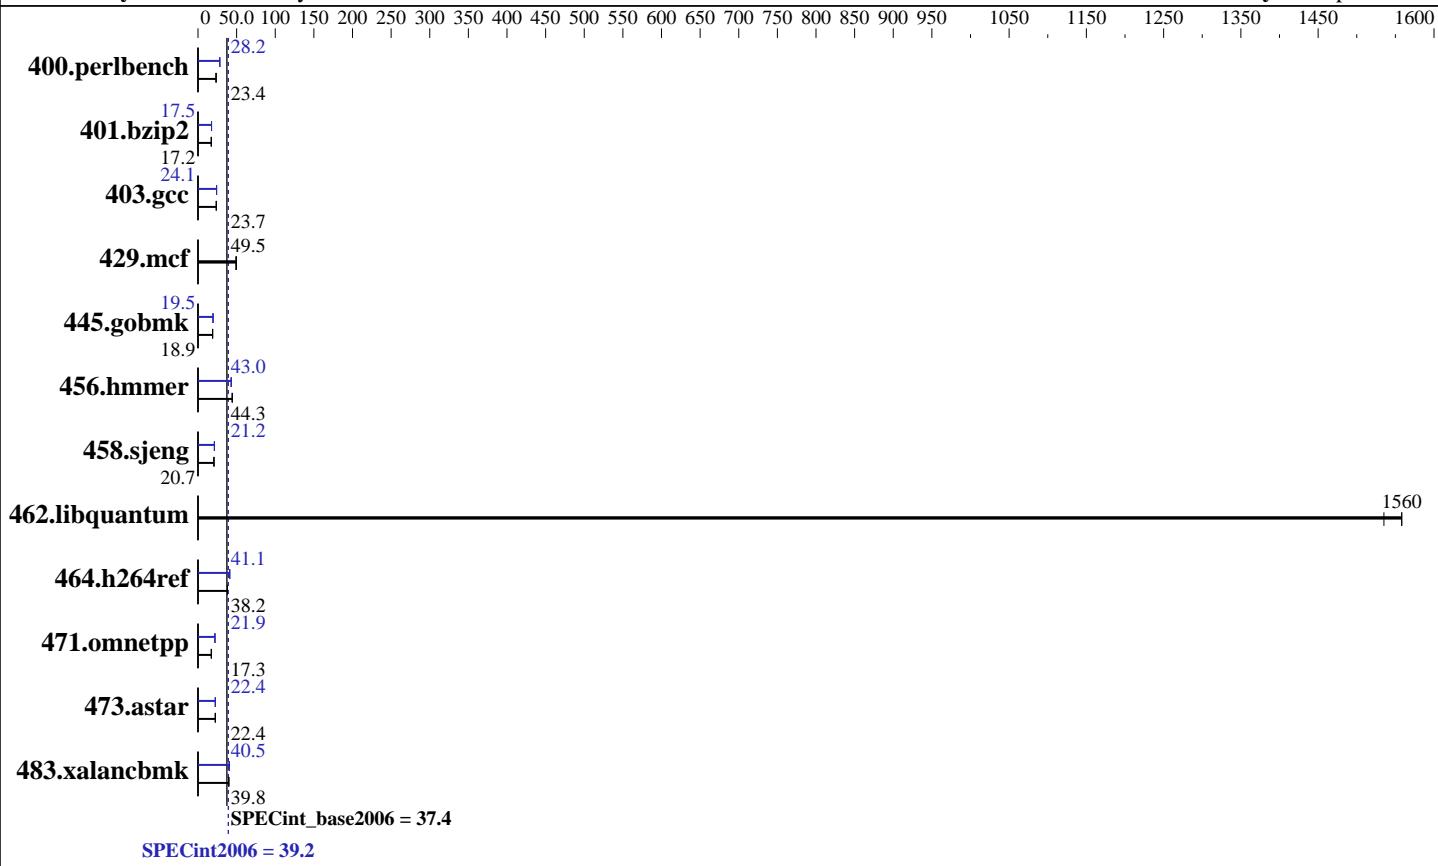

### Hardware

CPU Name:	Intel Xeon E5-2609 v2
CPU Characteristics:	
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	10 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC, running at 1333 MHz and CL11)
Disk Subsystem:	1 x 300 GB 15000 RPM SAS
Other Hardware:	None

### Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

**SPECint2006 = 39.2**

**SPECint\_base2006 = 37.4**

**CPU2006 license:** 9019

**Test date:** Nov-2013

**Test sponsor:** Cisco Systems

**Hardware Availability:** Sep-2013

**Tested by:** Cisco Systems

**Software Availability:** Sep-2013

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	417	23.4	<b>417</b>	<b>23.4</b>	418	23.4	346	28.2	<b>346</b>	<b>28.2</b>	347	28.2
401.bzip2	<b>560</b>	<b>17.2</b>	560	17.2	561	17.2	551	17.5	550	17.6	<b>551</b>	<b>17.5</b>
403.gcc	<b>340</b>	<b>23.7</b>	340	23.7	340	23.7	<b>335</b>	<b>24.1</b>	334	24.1	335	24.0
429.mcf	<b>184</b>	<b>49.5</b>	186	49.0	183	49.8	<b>184</b>	<b>49.5</b>	186	49.0	183	49.8
445.gobmk	555	18.9	<b>554</b>	<b>18.9</b>	554	18.9	539	19.5	<b>539</b>	<b>19.5</b>	538	19.5
456.hammer	<b>210</b>	<b>44.3</b>	210	44.4	211	44.3	218	42.9	217	43.1	<b>217</b>	<b>43.0</b>
458.sjeng	585	20.7	585	20.7	<b>585</b>	<b>20.7</b>	570	21.2	<b>570</b>	<b>21.2</b>	570	21.2
462.libquantum	<b>13.3</b>	<b>1560</b>	13.5	1540	13.3	1560	<b>13.3</b>	<b>1560</b>	13.5	1540	13.3	1560
464.h264ref	579	38.2	581	38.1	<b>580</b>	<b>38.2</b>	<b>539</b>	<b>41.1</b>	540	41.0	539	41.1
471.omnetpp	<b>362</b>	<b>17.3</b>	362	17.3	361	17.3	<b>285</b>	<b>21.9</b>	286	21.9	285	22.0
473.astar	<b>314</b>	<b>22.4</b>	312	22.5	314	22.4	<b>314</b>	<b>22.4</b>	313	22.4	<b>313</b>	<b>22.4</b>
483.xalancbmk	173	39.9	<b>173</b>	<b>39.8</b>	173	39.8	<b>170</b>	<b>40.5</b>	<b>170</b>	<b>40.5</b>	171	40.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

CPU performance set to HPC

Power Technology set to Custom

CPU Power State C6 set to Enabled

CPU Power State C1 Enhanced set to Disabled

Energy Performance policy set to Performance

Memory RAS configuration set to Maximum Performance

DRAM Clock Throttling Set to Performance

LV DDR Mode set to Performance-mode

DRAM Refresh Rate Set to 1x

Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818

\$Rev: 6818 \$ \$Date::: 2012-07-17 #\\$ e86d102572650a6e4d596a3cee98f191

running on rhel6.4-speed Sun Nov 24 15:36:32 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:

<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E5-2609 v2 @ 2.50GHz

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

<http://www.spec.org/>

Page 2



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

**SPECint2006 = 39.2**

**SPECint\_base2006 = 37.4**

**CPU2006 license:** 9019

**Test date:** Nov-2013

**Test sponsor:** Cisco Systems

**Hardware Availability:** Sep-2013

**Tested by:** Cisco Systems

**Software Availability:** Sep-2013

## Platform Notes (Continued)

```
2 "physical id"s (chips)
 8 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 4
  siblings   : 4
  physical 0: cores 0 1 2 3
  physical 1: cores 0 1 2 3
cache size : 10240 KB

From /proc/meminfo
MemTotal:      264460960 kB
HugePages_Total:       0
Hugepagesize:     2048 kB

/usr/bin/lsb_release -d
  Red Hat Enterprise Linux Server release 6.4 (Santiago)

From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

uname -a:
Linux rhel6.4-speed 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
x86_64 x86_64 x86_64 GNU/Linux

run-level 3 Nov 24 15:35

SPEC is set to: /opt/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sdb1        ext4  275G   82G  180G  32%  /

Additional information from dmidecode:
BIOS Cisco Systems, Inc. C220M3.1.5.2.27.071120132232 07/11/2013
Memory:
 16x 0xAD00 HMT42GR7AFR4C-RD 16 GB 1333 MHz 2 rank

(End of data from sysinfo program)
```

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"  
OMP\_NUM\_THREADS = "8"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

**SPECint2006 = 39.2**

**SPECint\_base2006 = 37.4**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Nov-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## General Notes (Continued)

runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>

## Base Compiler Invocation

C benchmarks:

    icc -m64

C++ benchmarks:

    icpc -m64

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
403.gcc: -DSPEC\_CPU\_LP64  
429.mcf: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hammer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
471.omnetpp: -DSPEC\_CPU\_LP64  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

    -xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32

C++ benchmarks:

    -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -Wl,-z,muldefs  
    -L/sh -lsmartheap64

## Base Other Flags

C benchmarks:

    403.gcc: -Dalloca=\_alloca



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

**SPECint2006 = 39.2**

**SPECint\_base2006 = 37.4**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Nov-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

403.gcc: -DSPEC\_CPU\_LP64

429.mcf: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

458.sjeng: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

473.astar: -DSPEC\_CPU\_LP64

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch  
-ansi-alias

401.bzip2: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div -prof-use(pass 2) -auto-ilp32 -opt-prefetch  
-ansi-alias

403.gcc: -xAVX -ipo -O3 -no-prec-div -inline-calloc  
-opt-malloc-options=3 -auto-ilp32

429.mcf: basepeak = yes

445.gobmk: -xAVX(pass 2) -prof-gen(pass 1) -prof-use(pass 2)  
-ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

**SPECint2006 = 39.2**

**SPECint\_base2006 = 37.4**

**CPU2006 license:** 9019

**Test sponsor:** Cisco Systems

**Tested by:** Cisco Systems

**Test date:** Nov-2013

**Hardware Availability:** Sep-2013

**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

456.hmmer: -xAVX -ipo -O3 -no-prec-div -unroll12 -auto-ilp32  
-ansi-alias

458.sjeng: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll14

462.libquantum: basepeak = yes

464.h264ref: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll12  
-ansi-alias

C++ benchmarks:

471.omnetpp: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2)  
-opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/sh -lsmartheap  
-ansi-alias

473.astar: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32  
-Wl,-z,muldefs -L/sh -lsmartheap64

483.xalancbmk: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias  
-Wl,-z,muldefs -L/sh -lsmartheap

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Cisco Systems

Cisco UCS C220 M3 (Intel Xeon E5-2609 v2, 2.50 GHz)

**SPECint2006 = 39.2**

**SPECint\_base2006 = 37.4**

**CPU2006 license:** 9019

**Test date:** Nov-2013

**Test sponsor:** Cisco Systems

**Hardware Availability:** Sep-2013

**Tested by:** Cisco Systems

**Software Availability:** Sep-2013

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 19:30:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 December 2013.