SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2609, 2.40 GHz)

SPECint®2006 = 36.1

SPECint_base2006 = 34.3

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Dec-2013
Hardware Availability: Jun-2012
Software Availability: Sep-2013

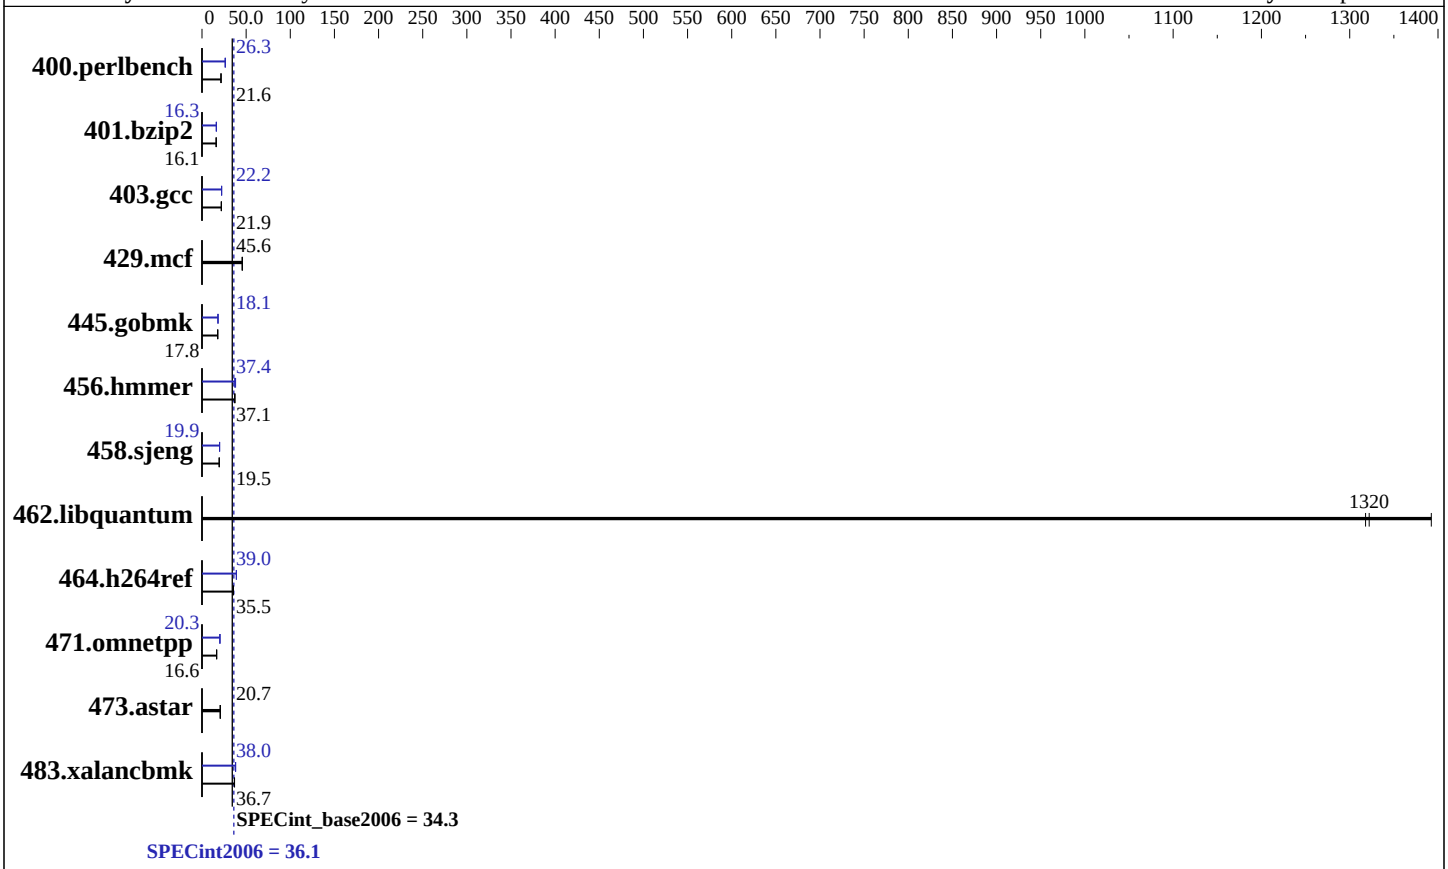

Hardware

CPU Name:	Intel Xeon E5-2609
CPU Characteristics:	
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	10 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC, running at 1067 MHz and CL7)
Disk Subsystem:	1 X 600 GB 1000 RPM SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	Yes
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B200 M3 (Intel Xeon E5-2609, 2.40 GHz)

SPECint2006 = 36.1

SPECint_base2006 = 34.3

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Dec-2013
Hardware Availability: Jun-2012
Software Availability: Sep-2013

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	455	21.5	453	21.6	**453**	**21.6**	**371**	**26.3**	371	26.3	370	26.4
401.bzip2	601	16.1	599	16.1	**600**	**16.1**	593	16.3	594	16.3	**593**	**16.3**
403.gcc	368	21.9	**368**	**21.9**	366	22.0	**362**	**22.2**	363	22.2	362	22.2
429.mcf	199	45.8	**200**	**45.6**	200	45.5	199	45.8	**200**	**45.6**	200	45.5
445.gobmk	589	17.8	**589**	**17.8**	589	17.8	**579**	**18.1**	579	18.1	579	18.1
456.hmmer	**251**	**37.1**	252	37.1	250	37.3	245	38.1	**250**	**37.4**	251	37.2
458.sjeng	619	19.6	**619**	**19.5**	621	19.5	**607**	**19.9**	607	19.9	608	19.9
462.libquantum	14.9	1390	15.7	1320	**15.7**	**1320**	14.9	1390	15.7	1320	**15.7**	**1320**
464.h264ref	**623**	**35.5**	621	35.6	628	35.3	569	38.9	**567**	**39.0**	567	39.0
471.omnetpp	376	16.6	**377**	**16.6**	378	16.5	**308**	**20.3**	308	20.3	308	20.3
473.astar	**339**	**20.7**	340	20.6	338	20.8	**339**	**20.7**	340	20.6	338	20.8
483.xalancbmk	188	36.6	**188**	**36.7**	187	36.9	181	38.1	**181**	**38.0**	181	38.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Settings:
Intel HT Technology =
CPU performance set to HPC
Power Technology set to Custom
CPU Power State C6 set to Enabled
CPU Power State C1 Enhanced set to Disabled
Energy Performance policy set to Performance
Memory RAS configuration set to Maximum Performance
DRAM Clock Throttling Set to Performance
LV DDR Mode set to Performance-mode
DRAM Refresh Rate Set to 1x
 Sysinfo program /opt/cpu2006-1.2/config/sysinfo.rev6818
 $Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
 running on localhost.localdomain Sun Dec 15 14:03:24 2013

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-2609 0 @ 2.40GHz
       2 "physical id"s (chips)
       8 "processors"
```

Continued on next page

Platform Notes (Continued)

```
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 4
         siblings  : 4
         physical 0: cores 0 1 2 3
         physical 1: cores 0 1 2 3
      cache size : 10240 KB

   From /proc/meminfo
      MemTotal:       132090360 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      Red Hat Enterprise Linux Server release 6.4 (Santiago)

   From /etc/*release* /etc/*version*
      redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
      system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

   uname -a:
      Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
      EST 2013 x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Dec 15 06:27

   SPEC is set to: /opt/cpu2006-1.2
      Filesystem     Type    Size  Used Avail Use% Mounted on
      /dev/sda1      ext4    550G   21G  501G   5% /

   Additional information from dmidecode:
     BIOS Cisco Systems, Inc. B200M3.2.1.3a.0.082320131800 08/23/2013
     Memory:
      16x 0xAD00 HMT31GR7EFR4C-RD 8 GB 1066 MHz 2 rank
      8x NO DIMM NO DIMM

   (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/opt/cpu2006-1.2/libs/32:/opt/cpu2006-1.2/libs/64:/opt/cpu2006-1.2/sh"
 OMP_NUM_THREADS = "8"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RedHat EL 6.4
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
  runspec command invoked through numactl i.e.:
```

Continued on next page

General Notes (Continued)

```
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m64
```

C++ benchmarks:
```
icpc -m64
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
445.gobmk: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
464.h264ref: `-DSPEC_CPU_LP64`
471.omnetpp: `-DSPEC_CPU_LP64`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -parallel -opt-prefetch -auto-p32
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -auto-p32
-Wl,-z,muldefs -L/sh -lsmartheap64
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m64`

400.perlbench: `icc -m32`

445.gobmk: `icc -m32`

464.h264ref: `icc -m32`

C++ benchmarks (except as noted below):
`icpc -m32`

473.astar: `icpc -m64`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
401.bzip2: `-DSPEC_CPU_LP64`
403.gcc: `-DSPEC_CPU_LP64`
429.mcf: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX`
473.astar: `-DSPEC_CPU_LP64`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -ansi-alias`

401.bzip2: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div -prof-use`(pass 2) `-auto-ilp32 -opt-prefetch -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div -inline-calloc -opt-malloc-options=3 -auto-ilp32`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ansi-alias`

Continued on next page

Peak Optimization Flags (Continued)

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32 -ansi-alias`

458.sjeng: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4`

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-ra-region-strategy=block -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias -Wl,-z,muldefs -L/sh -lsmartheap`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 16:54:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 31 December 2013.