SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B440 M2 (Intel Xeon E7-4807, 1.87 GHz)

SPECint®_rate2006 = 506

SPECint_rate_base2006 = 478

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Jan-2012
Hardware Availability: May-2011
Software Availability: Oct-2011

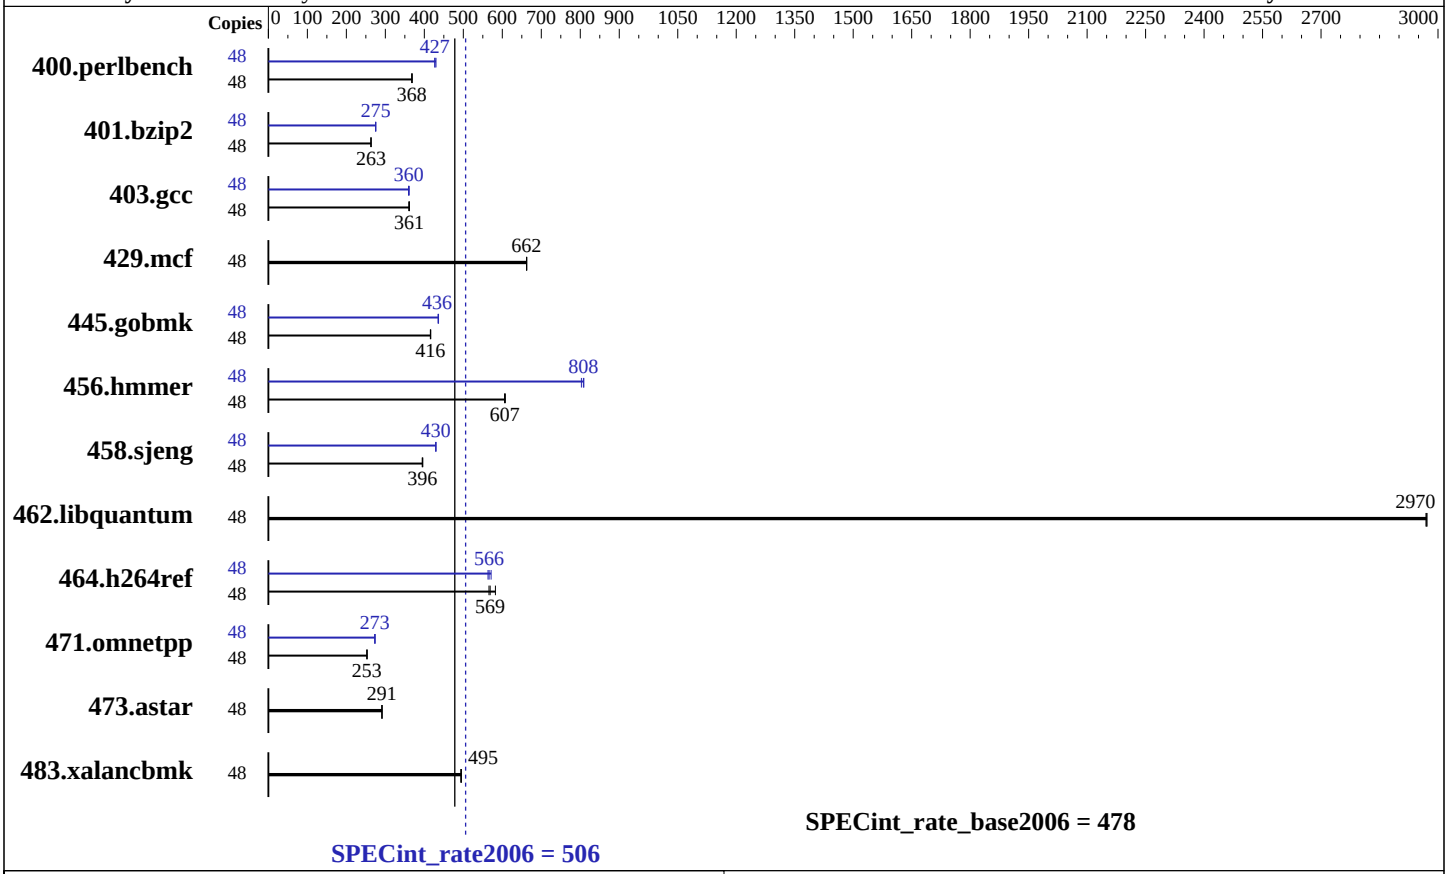

Hardware

CPU Name:	Intel Xeon E7-4807
CPU Characteristics:	
CPU MHz:	1867
FPU:	Integrated
CPU(s) enabled:	24 cores, 4 chips, 6 cores/chip, 2 threads/core
CPU(s) orderable:	1,2,3,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	18 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (32 x 16 GB 4Rx4 PC3-8500R-9, ECC, running at 800 MHz and CL7)
Disk Subsystem:	1 X 146 GB 15000 RPM SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.1 (Santiago) 2.6.32-131.0.15.el6.x86_64
Compiler:	C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V9.01

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B440 M2 (Intel Xeon E7-4807, 1.87 GHz)

SPECint_rate2006 = 506

SPECint_rate_base2006 = 478

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: Jan-2012
Hardware Availability: May-2011
Software Availability: Oct-2011

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	1271	369	**1273**	**368**	1276	368	48	1091	430	**1098**	**427**	1099	427
401.bzip2	48	**1760**	**263**	1760	263	1758	263	48	1682	275	1685	275	**1682**	**275**
403.gcc	48	1068	362	1073	360	**1069**	**361**	48	**1073**	**360**	1075	359	1070	361
429.mcf	48	660	663	661	662	**661**	**662**	48	660	663	661	662	**661**	**662**
445.gobmk	48	1209	416	1212	415	**1210**	**416**	48	1154	436	1156	435	**1155**	**436**
456.hmmer	48	739	606	737	608	**738**	**607**	48	553	809	558	803	**554**	**808**
458.sjeng	48	1467	396	1472	395	**1468**	**396**	48	1353	429	**1352**	**430**	1352	430
462.libquantum	48	335	2970	335	2970	**335**	**2970**	48	335	2970	335	2970	**335**	**2970**
464.h264ref	48	1824	582	1877	566	**1867**	**569**	48	**1876**	**566**	1859	571	1886	563
471.omnetpp	48	1188	252	1184	253	**1186**	**253**	48	**1098**	**273**	1096	274	1100	273
473.astar	48	1155	292	1158	291	**1157**	**291**	48	1155	292	1158	291	**1157**	**291**
483.xalancbmk	48	**669**	**495**	669	495	671	494	48	**669**	**495**	669	495	671	494

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Intel HT Technology = Enabled
CPU performance set to HPC
Power Technology set to Custom
CPU Power State C6 set to Enabled
CPU Power State C1 Enhanced set to Disabled
Memory RAS configuration set to Maximum Performance
DRAM Clock Throttling Set to Performance
 Sysinfo program /opt/cpu2006/config/sysinfo.rev6800
 $Rev: 6800 $ $Date:: 2011-10-11 #$ 6f2ebdff5032aaa42e583f96b07f99d3
 running on localhost.localdomain Wed Jan 18 18:24:10 2012

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E7- 4807 @ 1.87GHz
```

Continued on next page

Platform Notes (Continued)

```
        4 "physical id"s (chips)
        48 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 6
        siblings  : 12
        physical 0: cores 1 8 9 16 17 24
        physical 1: cores 0 8 9 16 17 25
        physical 2: cores 0 8 9 16 17 25
        physical 3: cores 2 8 9 16 17 18
     cache size : 18432 KB

  From /proc/meminfo
     MemTotal:       529231820 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.1 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.1 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux localhost.localdomain 2.6.32-131.0.15.el6.x86_64 #1 SMP Tue May 10
     15:42:40 EDT 2011 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Jan 18 18:21

  SPEC is set to: /opt/cpu2006
     Filesystem     Type    Size  Used Avail Use% Mounted on
     /dev/sda1      ext4    134G   59G   69G  47% /

  Additional information from dmidecode:

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/opt/cpu2006/libs/32:/opt/cpu2006/libs/64"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RHEL5.5
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
```

Continued on next page

General Notes (Continued)

```
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/smartheap -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

Continued on next page

Peak Compiler Invocation (Continued)

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias

Continued on next page

Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/smartheap -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2.20130717.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 20:15:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 January 2014.