SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2024G-6RF,
AMD Opteron 6338P

SPECint®_rate2006 = 807

SPECint_rate_base2006 = 708

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Sep-2013
Hardware Availability: Jan-2014
Software Availability: Sep-2012

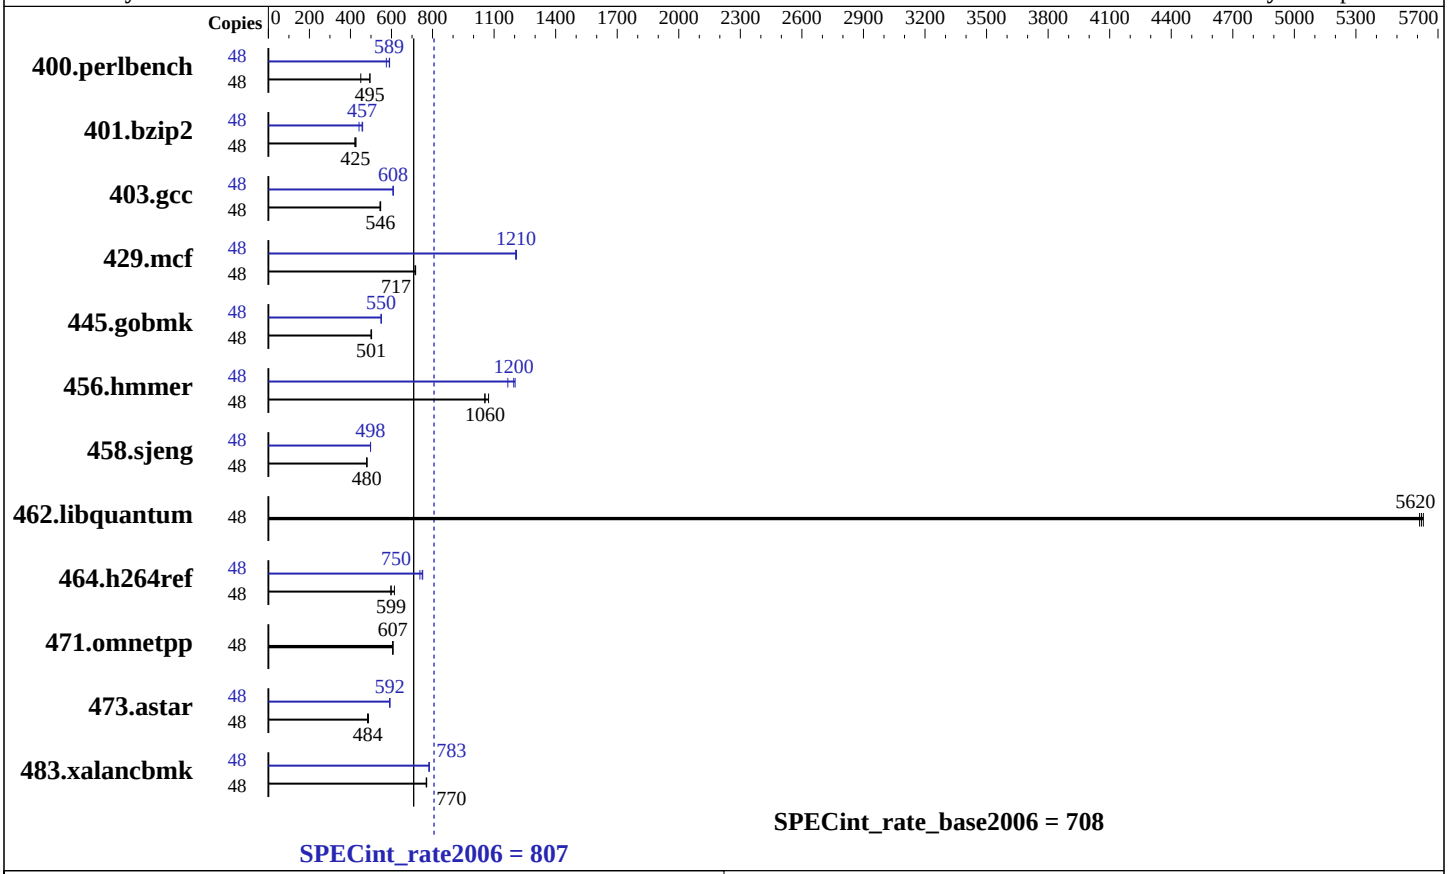

Hardware

CPU Name:	AMD Opteron 6338P
CPU Characteristics:	AMD Turbo CORE technology up to 2.80 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	48 cores, 4 chips, 12 cores/chip
CPU(s) orderable:	2,4 chips
Primary Cache:	384 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache:	12 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache:	16 MB I+D on chip per chip, 8 MB shared / 6 cores
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem:	1 x 320 GB SSD
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.3, Kernel 2.6.32-279.el6.x86_64
Compiler:	C/C++: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	SmartHeap 10.0 32-bit Library for Linux

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
(Test Sponsor: Advanced Micro Devices)

Supermicro A+ Server 2024G-6RF,
AMD Opteron 6338P

SPECint_rate2006 = 807

SPECint_rate_base2006 = 708

CPU2006 license: 49
Test sponsor: Advanced Micro Devices
Tested by: Advanced Micro Devices

Test date: Sep-2013
Hardware Availability: Jan-2014
Software Availability: Sep-2012

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	48	1041	450	948	495	**948**	**495**	48	794	591	816	575	**796**	**589**
401.bzip2	48	**1090**	**425**	1099	421	1085	427	48	1048	442	1008	459	**1014**	**457**
403.gcc	48	706	547	**707**	**546**	711	544	48	**635**	**608**	636	608	635	609
429.mcf	48	**611**	**717**	610	718	612	715	48	362	1210	363	1210	**363**	**1210**
445.gobmk	48	1005	501	1001	503	**1005**	**501**	48	914	551	917	549	**915**	**550**
456.hmmer	48	417	1070	425	1050	**424**	**1060**	48	**375**	**1200**	372	1200	384	1170
458.sjeng	48	1210	480	1211	480	**1210**	**480**	48	**1167**	**498**	1167	498	1166	498
462.libquantum	48	177	5630	**177**	**5620**	177	5610	48	177	5630	**177**	**5620**	177	5610
464.h264ref	48	1781	597	**1774**	**599**	1730	614	48	1412	752	**1417**	**750**	1439	738
471.omnetpp	48	495	606	494	607	**495**	**607**	48	495	606	494	607	**495**	**607**
473.astar	48	**696**	**484**	691	488	697	484	48	569	592	571	591	**569**	**592**
483.xalancbmk	48	429	772	**430**	**770**	430	770	48	422	784	423	783	**423**	**783**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst

Set vm/nr_hugepages=43008 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/root/work/cpu2006v1.2/amd1206-rate-libs-revA/32:/root/work/cpu2006v1.2/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-Ofast -CG:local_sched_alg=1 -INLINE:aggressive=ON -IPA:plimit=8000
-IPA:small_pu=100 -HP:bd=2m:heap=2m -mso -LNO:prefetch=2
-march=bdver1

C++ benchmarks:
-Ofast -m32 -INLINE:aggressive=on -CG:cmp_peep=on -D__OPEN64_FAST_SET
-march=bdver1 -L/root/work/libraries/SmartHeap-10/lib -lsmartheap

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64

Continued on next page

Peak Portability Flags (Continued)

401.bzip2: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -LNO:opt=0 -IPA:plimit=20000
-OPT:unroll_times_max=8 -OPT:unroll_size=256
-OPT:unroll_level=2 -OPT:keep_ext=on -WOPT:if_conv=0
-WOPT:sib=on -CG:local_sched_alg=1 -CG:unroll_fb_req=on
-CG:movext_icmp=off -HP:bd=2m:heap=2m -march=bdver1
-GRA:aggr_loop_splitting=off -GRA:loop_splitting=off

401.bzip2: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:prefetch=2 -LNO:pf2=0 -OPT:alias=disjoint
-OPT:goto=off -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-march=bdver2

403.gcc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:trip_count=256 -CG:cmp_peep=on -CG:pre_minreg_level=2
-m32 -HP:bdt=2m:heap=2m -GRA:unspill=on -IPA:small_pu=200
-WOPT:sib=on -march=bdver2 -mno-fma4

429.mcf: -O3 -OPT:unroll_times_max=5 -ipa -INLINE:aggressive=on
-CG:gcm=off -CG:dsched=on -GRA:prioritize_by_density=on
-m32 -HP:bdt=2m:heap=2m -mso -march=bdver1

445.gobmk: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:unroll_size=256 -OPT:unroll_times_max=8
-OPT:keep_ext=on -IPA:plimit=750 -IPA:min_hotness=300
-IPA:pu_reorder=1 -LNO:ignore_feedback=off -WOPT:if_conv=2
-HP:bd=2m:heap=2m -march=bdver1

456.hmmer: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:prefetch=2 -OPT:alias=disjoint
-OPT:unroll_times_max=16 -OPT:unroll_size=512
-OPT:unroll_level=2 -OPT:keep_ext=on -CG:cflow=0
-CG:cmp_peep=on -CG:pre_local_sched=off -HP:bdt=2m:heap=2m
-CG:p2align=0 -CG:load_exe=3 -CG:dsched=on -march=bdver1

Continued on next page

Peak Optimization Flags (Continued)

458.sjeng: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast`
`-CG:ptr_load_use=0 -CG:divrem_opt=on -CG:movext_icmp=off`
`-CG:locs_best=on -LNO:full_unroll=10 -IPA:pu_reorder=2`
`-HP:heap=2m:bd=2m -WOPT:sib=on -march=bdver1`

462.libquantum: `basepeak = yes`

464.h264ref: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-O3`
`-OPT:unroll_size=256 -OPT:unroll_times_max=2`
`-IPA:plimit=20000 -OPT:alias=disjoint -CG:ptr_load_use=0`
`-CG:local_sched_alg=1 -HP:bdt=2m:heap=2m -march=bdver1`

C++ benchmarks:

471.omnetpp: `basepeak = yes`

473.astar: `-fb_create fbdata`(pass 1) `-fb_opt fbdata`(pass 2) `-Ofast`
`-WOPT:if_conv=0 -WOPT:sib=on -CG:divrem_opt=on`
`-CG:p2align=1 -CG:dsched=on -GRA:optimize_boundary=on`
`-OPT:alias=disjoint -INLINE:aggressive=on`
`-IPA:small_pu=3000 -IPA:plimit=3000 -HP:bdt=2m:heap=2m`
`-march=bdver1`

483.xalancbmk: `-Ofast -LNO:prefetch=2 -OPT:unroll_size=512`
`-OPT:unroll_times_max=8 -D__OPEN64_FAST_SET`
`-INLINE:aggressive=on -m32 -CG:cmp_peep=on`
`-CG:local_sched=off -CG:p2align=1 -GRA:unspill=on`
`-TENV:frame_pointer=off -fno-emit-exceptions -march=bdver2`
`-mno-fma4`
`-L/root/work/libraries/SmartHeap-10/lib -lsmartheap`

The flags file that was used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.html`

You can also download the XML flags source by saving the following link:
`http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:03:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 22 January 2014.