SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sugon

I620-G15 (Intel Xeon E5-2637 v2, 3.50 GHz)

SPECint®_rate2006 = 428

SPECint_rate_base2006 = 411

CPU2006 license:	9046	**Test date:**	Jan-2014
Test sponsor:	Sugon	**Hardware Availability:**	Jan-2014
Tested by:	Sugon	**Software Availability:**	Jan-2014

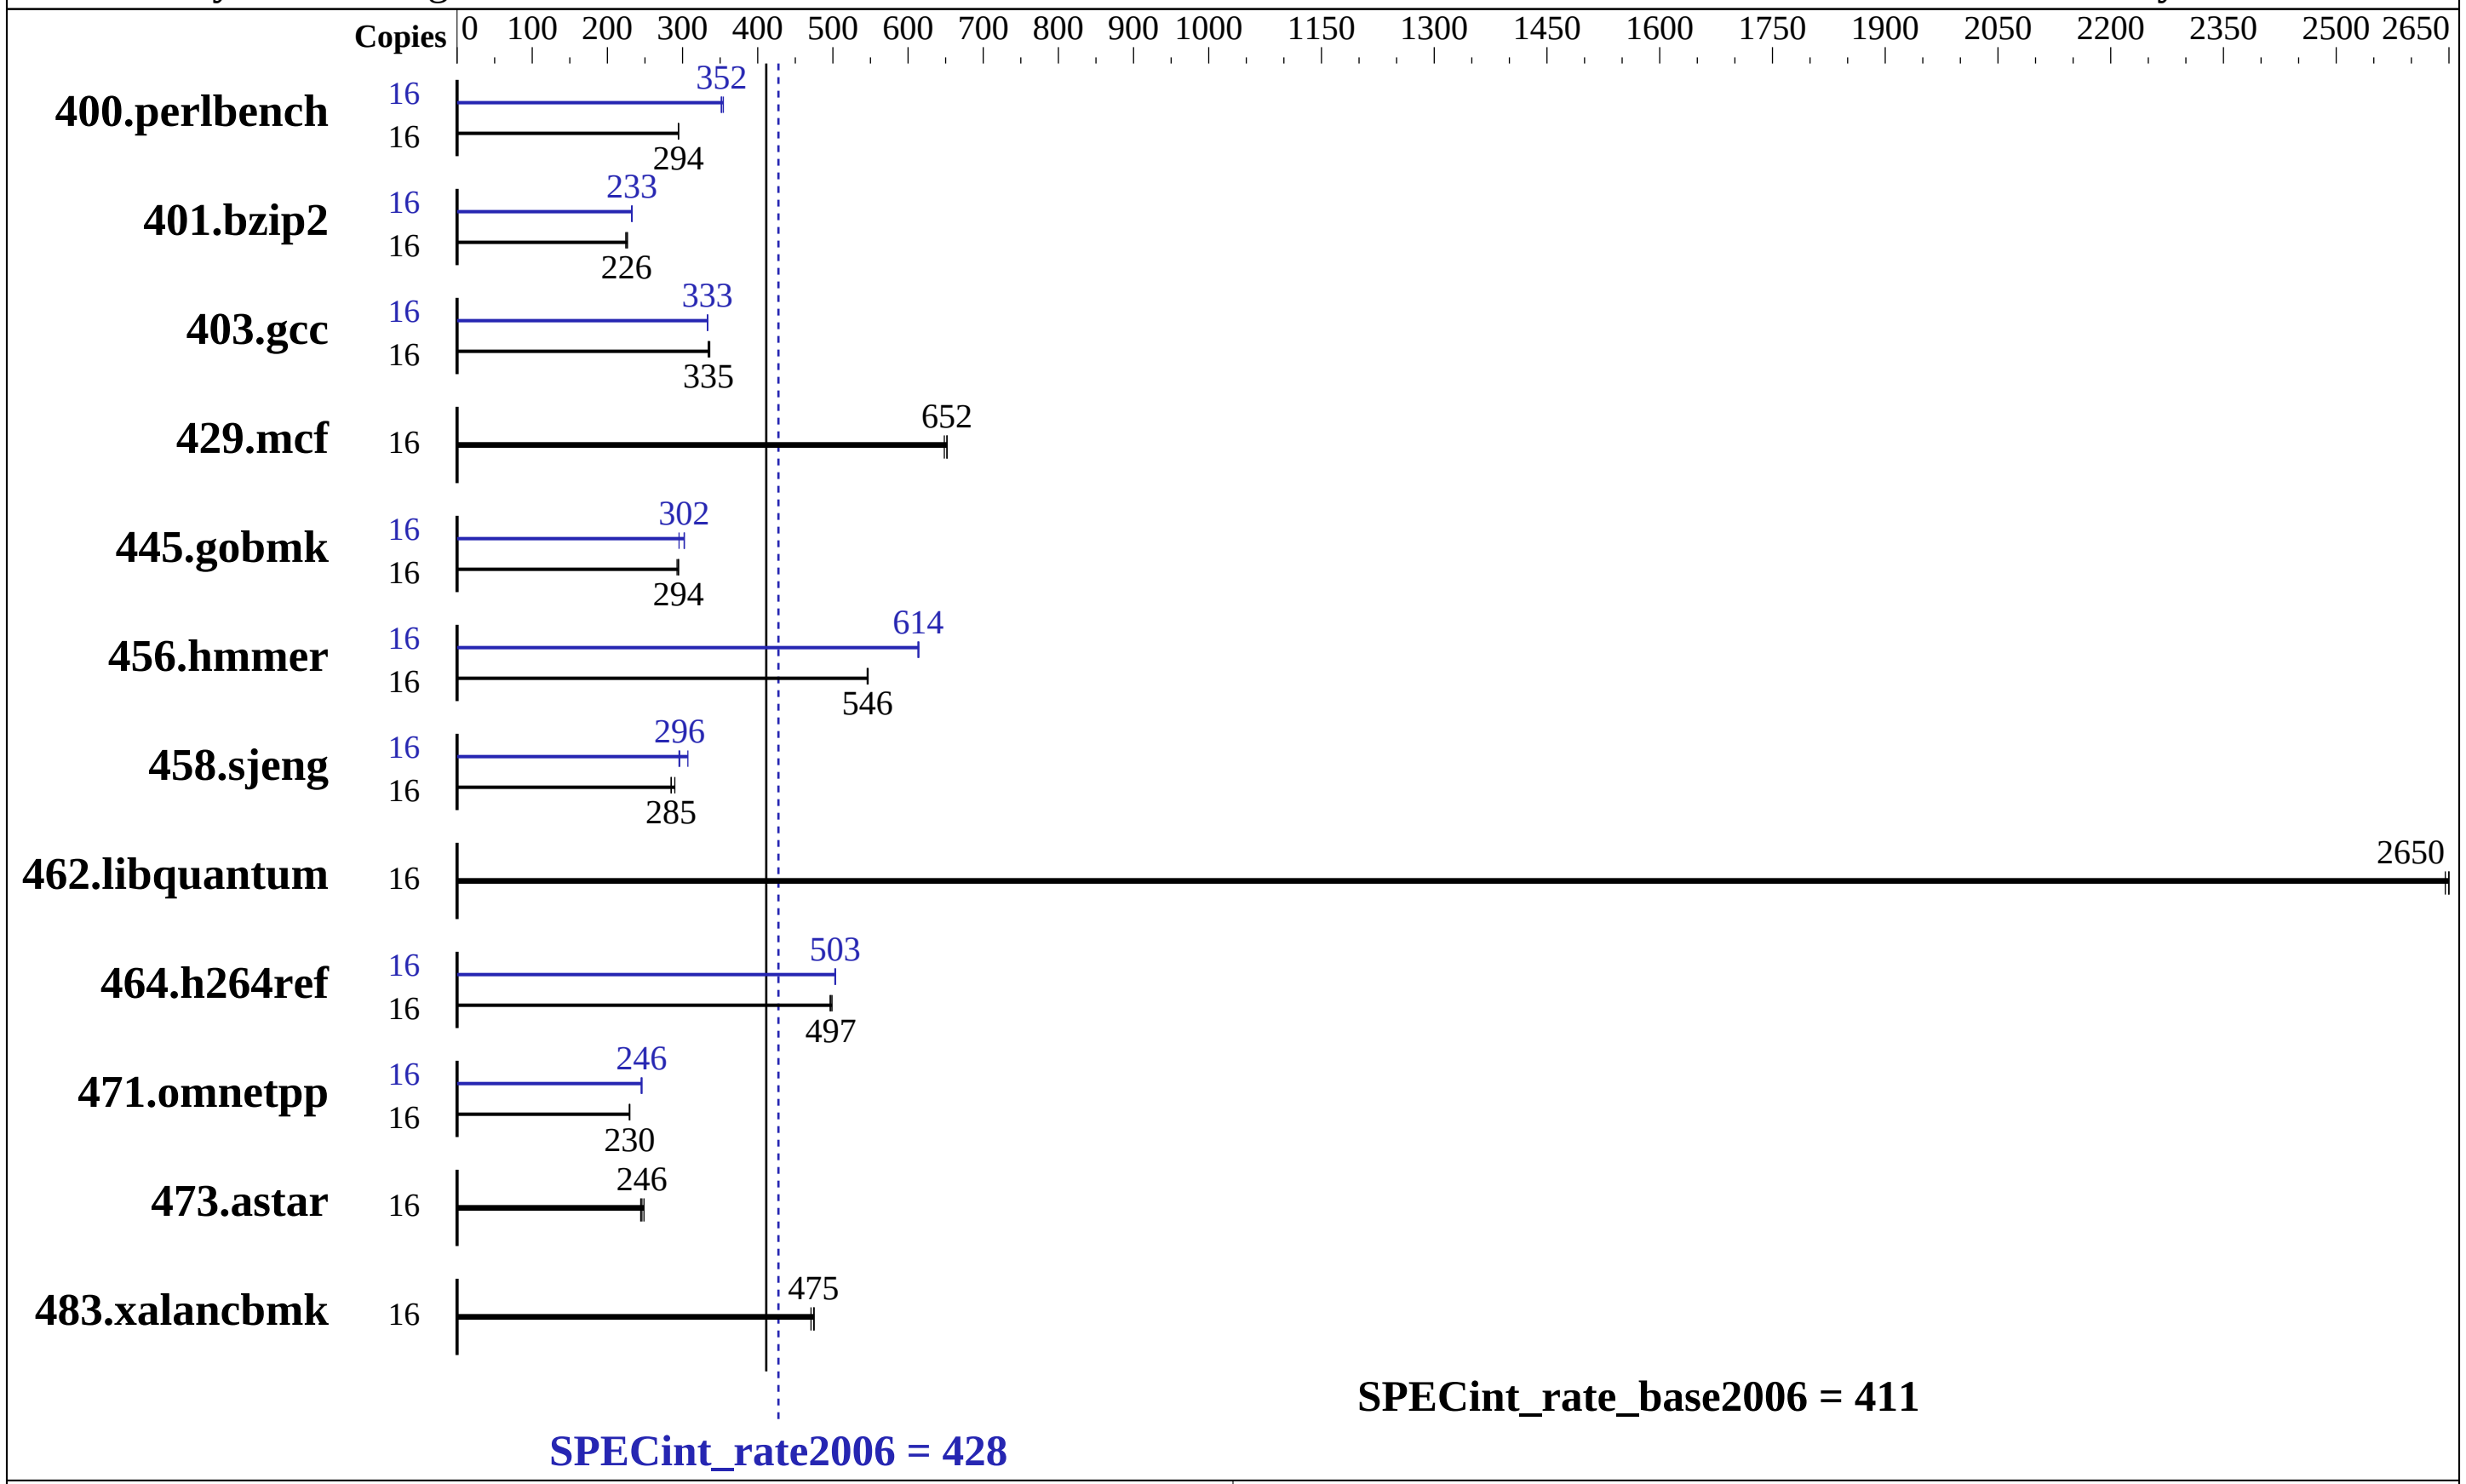

Hardware

CPU Name:	Intel Xeon E5-2637 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	3500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem:	1 X 2 TB SATA 7200 RPM, RAID 0
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

Sugon

I620-G15 (Intel Xeon E5-2637 v2, 3.50 GHz)

SPECint_rate2006 = 428

SPECint_rate_base2006 = 411

CPU2006 license: 9046
Test sponsor: Sugon
Tested by: Sugon
Test date: Jan-2014
Hardware Availability: Jan-2014
Software Availability: Jan-2014

Results Table

Benchmark	Base Copies	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Base Seconds	Base Ratio	Peak Copies	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio	Peak Seconds	Peak Ratio
400.perlbench	16	531	294	**531**	**294**	530	295	16	441	354	**444**	**352**	445	351
401.bzip2	16	**684**	**226**	688	224	681	227	16	665	232	**664**	**233**	663	233
403.gcc	16	**385**	**335**	383	336	385	334	16	**387**	**333**	387	333	386	334
429.mcf	16	**224**	**652**	225	648	224	652	16	**224**	**652**	225	648	224	652
445.gobmk	16	570	295	573	293	**570**	**294**	16	**556**	**302**	555	302	568	295
456.hmmer	16	274	546	**273**	**546**	273	547	16	243	613	243	614	**243**	**614**
458.sjeng	16	680	285	**679**	**285**	668	290	16	656	295	**654**	**296**	630	307
462.libquantum	16	**125**	**2650**	125	2650	125	2650	16	**125**	**2650**	125	2650	125	2650
464.h264ref	16	713	496	710	499	**712**	**497**	16	704	503	703	504	**704**	**503**
471.omnetpp	16	436	229	**435**	**230**	435	230	16	407	246	408	245	**407**	**246**
473.astar	16	**457**	**246**	460	244	452	249	16	**457**	**246**	460	244	452	249
483.xalancbmk	16	234	471	**233**	**475**	232	475	16	234	471	**233**	**475**	232	475

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS Configuration:
Intel Virtualization technology set to disabled
Power Technology set to performance
Turbo boost set to enabled
DDR Speed set to force 1866
Sysinfo program /home/cpu2006/config/sysinfo.rev6874
$Rev: 6874 $ $Date:: 2013-11-20 #$ 654bd3fcf53b06faef0efe54ed011998
running on cpu2006 Tue Jan  7 20:11:33 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2637 v2 @ 3.50GHz
      2 "physical id"s (chips)
      16 "processors"
```

Continued on next page

Platform Notes (Continued)

```
      cores, siblings (Caution: counting these is hw and system dependent.  The
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 4
         siblings  : 8
         physical 0: cores 1 2 3 4
         physical 1: cores 1 2 3 4
      cache size : 15360 KB

   From /proc/meminfo
      MemTotal:       264504588 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      Red Hat Enterprise Linux Server release 6.4 (Santiago)

   From /etc/*release* /etc/*version*
      redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
      system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

   uname -a:
      Linux cpu2006 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST 2013
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Jan 7 20:08

   SPEC is set to: /home/cpu2006
      Filesystem     Type    Size  Used Avail Use% Mounted on
      /dev/mapper/vg_cpu2006-lv_home
                     ext4    1.8T   98G  1.6T   6% /home
   Additional information from dmidecode:

      Warning: Use caution when you interpret this section. The 'dmidecode' program
      reads system data which is "intended to allow hardware to be accurately
      determined", but the intent may not be met, as there are frequent changes to
      hardware, firmware, and the "DMTF SMBIOS" standard.

     BIOS American Megatrends Inc. V8.100A 10/31/2013
     Memory:
      16x Hynix Semiconductor HMT42GR7AFR4C-RD 16 GB 1 rank 1866 MHz

   (End of data from sysinfo program)
```

General Notes

```
  Environment variables set by runspec before the start of the run:
  LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

   Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
```

Continued on next page

General Notes (Continued)

```
memory using RedHat EL 6.4
Transparent Huge Pages enabled with:
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc   -m32`

C++ benchmarks:
`icpc -m32`

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`
`-Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc   -m32`

Continued on next page

Peak Compiler Invocation (Continued)

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Peak Optimization Flags

C benchmarks:

400.perlbench: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-auto-ilp32`

401.bzip2: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-opt-prefetch -auto-ilp32 -ansi-alias`

403.gcc: `-xSSE4.2 -ipo -O3 -no-prec-div`

429.mcf: `basepeak = yes`

445.gobmk: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-prof-use`(pass 2) `-ansi-alias -opt-mem-layout-trans=3`

456.hmmer: `-xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32`

458.sjeng: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll4 -auto-ilp32`

Continued on next page

Peak Optimization Flags (Continued)

462.libquantum: `basepeak = yes`

464.h264ref: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2` `-ansi-alias`

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias` `-opt-ra-region-strategy=block` `-Wl,-z,muldefs` `-L/sh` `-lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Sugon-Platform-Settings-V1.2-IVB.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 21:18:39 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 28 January 2014.