SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT, Opteron 6338P)
AMD Opteron 6338P

SPECfp®_rate2006 = 332

SPECfp_rate_base2006 = 301

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2013
Hardware Availability: Jan-2014
Software Availability: Aug-2012

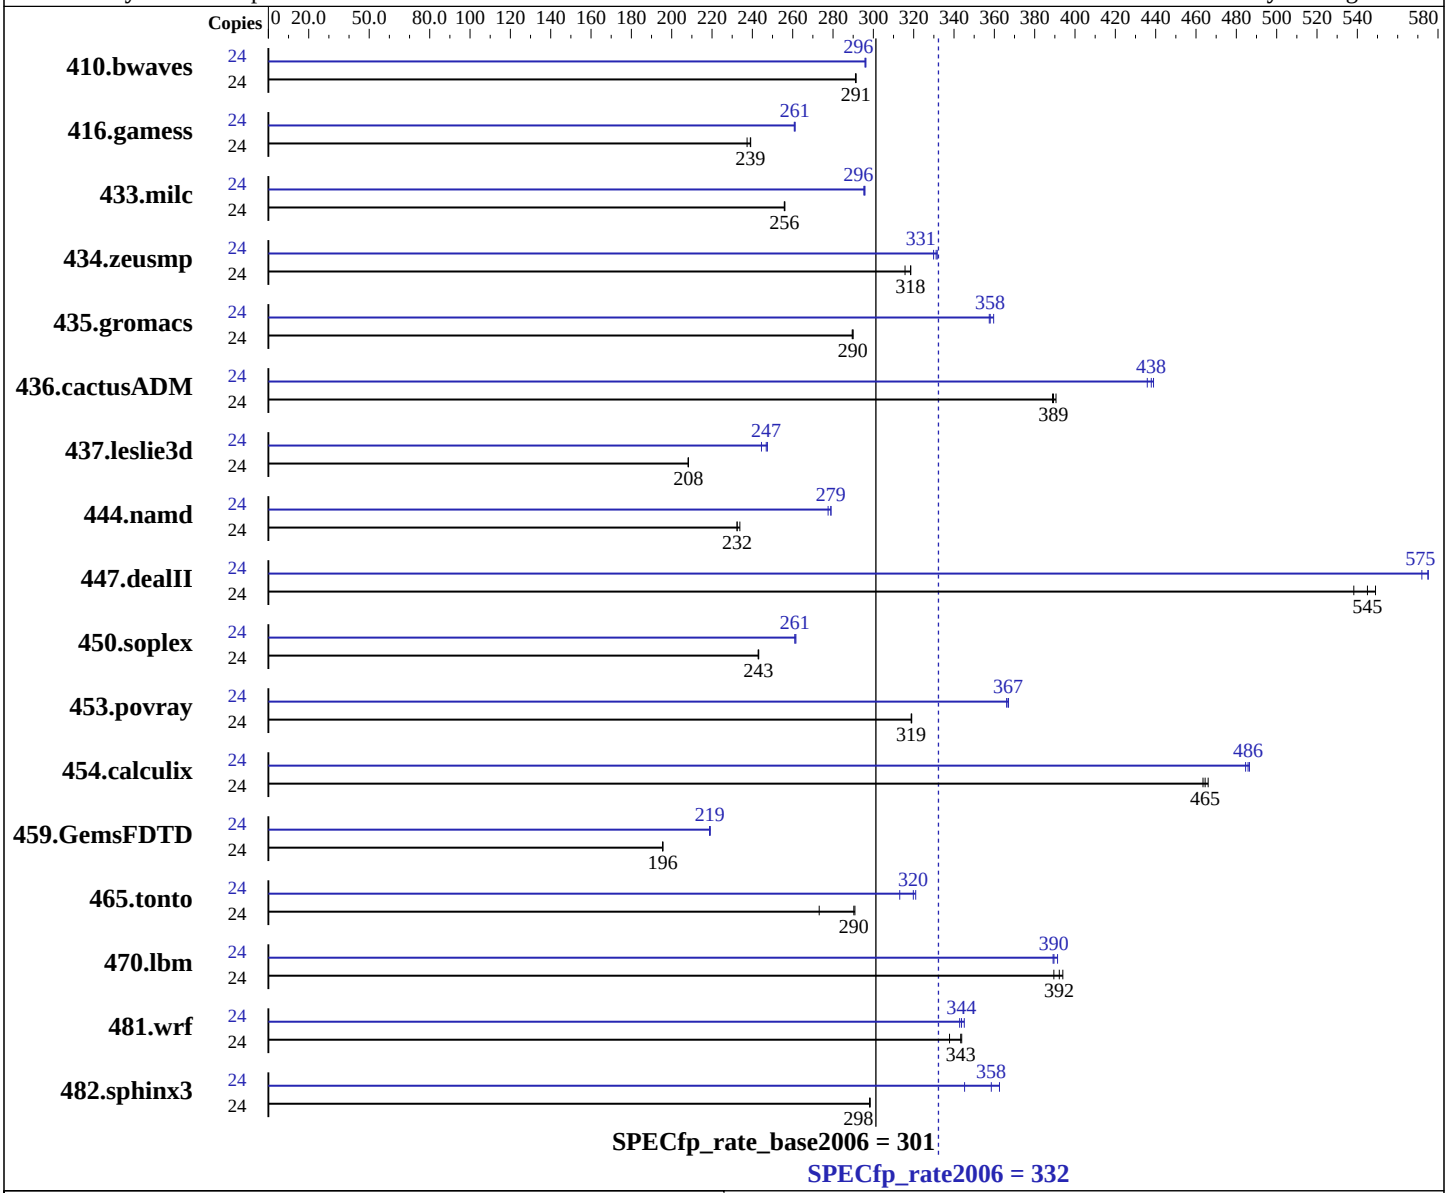

Hardware

CPU Name:	AMD Opteron 6338P
CPU Characteristics:	AMD Turbo CORE technology up to 2.80 GHz
CPU MHz:	2300
FPU:	Integrated
CPU(s) enabled:	24 cores, 2 chips, 12 cores/chip
CPU(s) orderable:	1,2 chips

Continued on next page

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4, Kernel 2.6.32-358.el6.x86_64
Compiler:	C/C++/Fortran: Version 4.5.2 of x86 Open64 Compiler Suite (from AMD)
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (Full multiuser with network)
Base Pointers:	64-bit
Peak Pointers:	32/64-bit

Continued on next page

SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro

Supermicro Processor Blade SBA-7222G-T2 (BHDGT, Opteron 6338P)
AMD Opteron 6338P

SPECfp_rate2006 = 332

SPECfp_rate_base2006 = 301

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Oct-2013
Hardware Availability: Jan-2014
Software Availability: Aug-2012

Primary Cache: 384 KB I on chip per chip, 64 KB I shared / 2 cores; 16 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: 16 MB I+D on chip per chip, 8 MB shared / 6 cores
Other Cache: None
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-12800R-11, ECC)
Disk Subsystem: 1 x 500 GB SATA II, 7200 RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1119	291	1120	291	**1120**	**291**	24	**1102**	**296**	1101	296	1102	296
416.gamess	24	**1966**	**239**	1965	239	1980	237	24	1799	261	1802	261	**1800**	**261**
433.milc	24	**861**	**256**	861	256	860	256	24	745	296	**745**	**296**	746	295
434.zeusmp	24	692	316	686	319	**686**	**318**	24	**660**	**331**	662	330	658	332
435.gromacs	24	592	290	**591**	**290**	591	290	24	**479**	**358**	476	360	479	357
436.cactusADM	24	**737**	**389**	734	391	738	389	24	653	439	658	436	**655**	**438**
437.leslie3d	24	1083	208	1084	208	**1083**	**208**	24	**914**	**247**	912	247	923	245
444.namd	24	823	234	**828**	**232**	828	232	24	690	279	693	278	**690**	**279**
447.dealII	24	500	549	**504**	**545**	510	538	24	480	572	**478**	**575**	477	575
450.soplex	24	823	243	824	243	**823**	**243**	24	765	262	767	261	**766**	**261**
453.povray	24	400	319	400	319	**400**	**319**	24	349	366	348	367	**348**	**367**
454.calculix	24	**426**	**465**	425	466	427	463	24	407	487	**408**	**486**	409	485
459.GemsFDTD	24	1303	195	1301	196	**1302**	**196**	24	**1164**	**219**	1162	219	1164	219
465.tonto	24	812	291	865	273	**813**	**290**	24	754	313	736	321	**738**	**320**
470.lbm	24	837	394	**841**	**392**	847	390	24	847	389	843	391	**846**	**390**
481.wrf	24	794	338	**781**	**343**	780	344	24	782	343	777	345	**780**	**344**
482.sphinx3	24	1569	298	**1569**	**298**	1567	298	24	**1305**	**358**	1290	363	1355	345

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.
```

Operating System Notes

```
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152'  was used to set environment locked pages in memory limit

Set transparent_hugepage=never as a boot parameter in /boot/grub/menu.lst
```

Continued on next page

Operating System Notes (Continued)

```
Set vm/nr_hugepages=21504 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

```
C State mode set to disabled under Processor & Clock Options in BIOS.
HPC Mode set to enabled under Processor & Clock Options in BIOS.
C1E Support set to disabled under Processor & Clock Options in BIOS.
Power Down Enable set to disabled in Memory Configuration in BIOS.
```

General Notes

```
Environment variables set by runspec before the start of the run:
HUGETLB_LIMIT = "896"
LD_LIBRARY_PATH = "/home/spec/amd1206-rate-libs-revA/32:/home/spec/amd1206-rate-libs-revA/64"

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at
http://developer.amd.com/cpu/open64

Binaries were compiled on a system with 2x AMD Opteron 6386SE chips + 128GB Memory using RHEL 6.3
```

Base Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64

Continued on next page

Base Portability Flags (Continued)

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -march=bdver1

C++ benchmarks:
-Ofast -static -CG:load_exe=0 -OPT:malloc_alg=1 -INLINE:aggressive=on -HP:bd=2m:heap=2m -D__OPEN64_FAST_SET -march=bdver1

Fortran benchmarks:
-Ofast -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256 -HP:bd=2m:heap=2m -mso -march=bdver1

Benchmarks using both Fortran and C:
-Ofast -OPT:malloc_alg=1 -HP:bd=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -mso -march=bdver1 -LNO:blocking=off -LNO:simd_peel_align=on -OPT:rsqrt=2 -OPT:unroll_size=256

Peak Compiler Invocation

C benchmarks:
opencc

C++ benchmarks:
openCC

Fortran benchmarks:
openf95

Benchmarks using both Fortran and C:
opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LINUX -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LP64 -fno-second-underscore

Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:movnti=1 -CG:locs_best=on -HP:bdt=2m:heap=2m -IPA:plimit=7000 -IPA:callee_limit=1200 -OPT:struct_array_copy=2 -OPT:alias=field_sensitive -mso -march=bdver1

470.lbm: -Ofast -CG:cmp_peep=on -OPT:keep_ext=on -HP:bdt=2m:heap=2m -IPA:plimit=8000 -IPA:small_pu=100 -march=bdver1 -mso

482.sphinx3: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast -m32 -IPA:plimit=1000 -OPT:malloc_alg=2 -CG:cmp_peep=on -CG:p2align=0 -CG:load_exe=1 -CG:dsched=on -INLINE:aggressive=on -LNO:prefetch=2 -LNO:prefetch_ahead=4 -mso -march=bdver2

C++ benchmarks:

444.namd: -Ofast -IPA:plimit=3000 -LNO:ignore_feedback=off -CG:local_sched_alg=0 -CG:load_exe=0 -OPT:unroll_size=256 -fno-exceptions -HP:bdt=2m:heap=2m -LNO:if_select_conv=1 -OPT:alias=disjoint -LNO:psimd_iso_unroll=ON -march=bdver1

447.dealII: -Ofast -D__OPEN64_FAST_SET -static -INLINE:aggressive=on -LNO:opt=1 -LNO:simd=2 -fno-emit-exceptions -m32 -OPT:unroll_times_max=8 -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m -GRA:unspill=on -CG:cmp_peep=on -CG:movext_icmp=off -TENV:frame_pointer=off -march=bdver1

Continued on next page

Peak Optimization Flags (Continued)

450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3
-LNO:ignore_feedback=off -INLINE:aggressive=on -OPT:RO=1
-OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
-OPT:fold_unsigned_relops=on -fno-exceptions -CG:p2align=0
-m32 -mno-fma4 -HP:bdt=2m:heap=2m -WOPT:sib=on
-march=bdver1

453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-CG:pre_local_sched=off -CG:p2align=0 -CG:p2align_split=on
-CG:dsched=on -INLINE:aggressive=on -HP:bd=2m:heap=2m
-OPT:transform=2 -OPT:alias=disjoint -WOPT:aggcm=0
-march=bdver2

Fortran benchmarks:

410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-OPT:Ofast -OPT:treeheight=on -LNO:blocking=off
-LNO:ignore_feedback=off -LNO:fu=4 -LNO:loop_model_simd=on
-LNO:simd_rm_unity_remainder=on -WOPT:aggstr=0
-HP:bdt=2m:heap=2m -CG:cmp_peep=on -march=bdver1

416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:fu=6 -LNO:blocking=0 -LNO:simd=2 -OPT:ro=3
-OPT:recip=on -CG:local_sched_alg=1 -HP:bdt=2m:heap=2m
-WOPT:sib=on -march=bdver1

434.zeusmp: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:interchange=off -IPA:plimit=1500
-HP:bdt=2m:heap=2m -march=bdver1

437.leslie3d: -Ofast -CG:pre_minreg_level=2 -LNO:simd=0 -LNO:fusion=2
-HP:bdt=2m:heap=2m -mso -march=bdver1

459.GemsFDTD: -Ofast -IPA:plimit=1500 -OPT:unroll_size=1024
-OPT:unroll_times_max=16 -LNO:fission=2
-CG:local_sched_alg=2 -HP -march=bdver1

465.tonto: -Ofast -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -CG:local_sched_alg=3 -IPA:plimit=525
-HP:bdt=2m:heap=2m -march=bdver1

Benchmarks using both Fortran and C:

435.gromacs: -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m
-CG:local_sched_alg=2 -CG:load_exe=3 -GRA:unspill=on
-march=bdver1 -LNO:simd=3

436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast
-LNO:blocking=off -LNO:prefetch=2 -LNO:pf2=0
-LNO:prefetch_ahead=4 -HP -CG:locs_shallow_depth=1
-CG:load_exe=0 -CG:dsched=on -WOPT:sib=on -march=bdver1

Continued on next page

Peak Optimization Flags (Continued)

454.calculix: `-Ofast -OPT:unroll_size=256 -OPT:alias=disjoint -GRA:optimize_boundary=on -CG:dsched=on -HP:bdt=2m:heap=2m -march=bdver1`

481.wrf: `-Ofast -LNO:blocking=off -LANG:copyinout=off -IPA:callee_limit=5000 -GRA:prioritize_by_density=on -HP -WOPT:sib=on -march=bdver1`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.html
http://www.spec.org/cpu2006/flags/amd-Supermicro-platform-rate-revC-I.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/x86-open64-452-flags-rate-revA-III.xml
http://www.spec.org/cpu2006/flags/amd-Supermicro-platform-rate-revC-I.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:12:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 13 February 2014.