SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4
(Intel Xeon E5-2637 v2, 3.50 GHz)

SPECint®_rate2006 = 428

SPECint_rate_base2006 = 412

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jan-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

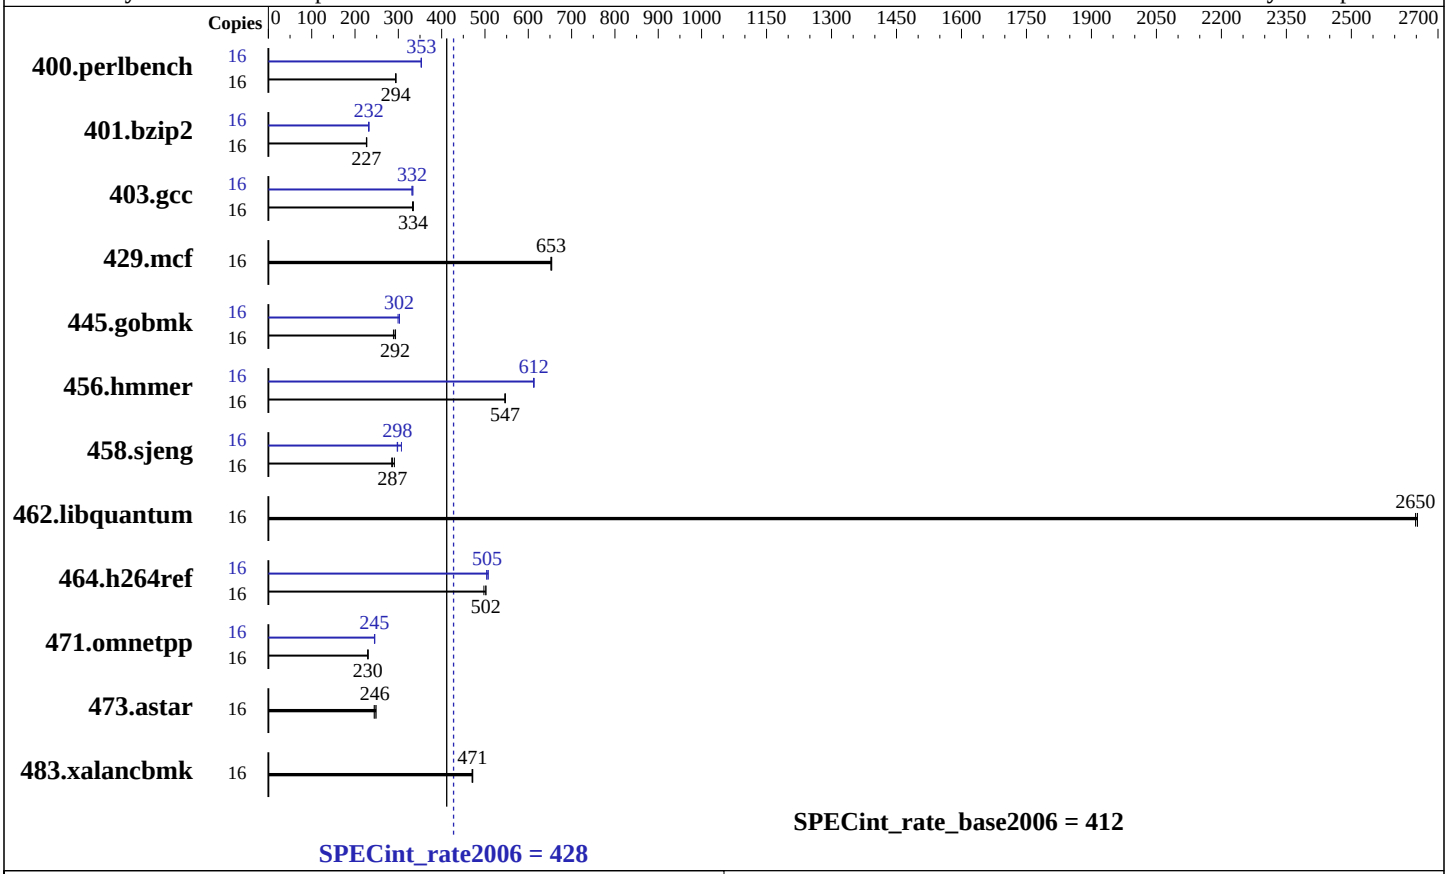

Hardware

CPU Name:	Intel Xeon E5-2637 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.80 GHz
CPU MHz:	3500
FPU:	Integrated
CPU(s) enabled:	8 cores, 2 chips, 4 cores/chip, 2 threads/core
CPU(s) orderable:	1,2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	15 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (16 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem:	1 x 400 GB SAS SSD, RAID 0
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

IBM System x3650 M4
(Intel Xeon E5-2637 v2, 3.50 GHz)

SPECint_rate2006 = 428

SPECint_rate_base2006 = 412

CPU2006 license: 11
Test sponsor: IBM Corporation
Tested by: IBM Corporation

Test date: Jan-2014
Hardware Availability: Dec-2013
Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	**532**	**294**	532	294	531	294	16	442	353	443	353	**443**	**353**
401.bzip2	16	**681**	**227**	680	227	682	226	16	**666**	**232**	667	232	665	232
403.gcc	16	385	334	387	333	**385**	**334**	16	**388**	**332**	388	332	386	334
429.mcf	16	223	654	224	652	**223**	**653**	16	223	654	224	652	**223**	**653**
445.gobmk	16	**574**	**292**	572	294	581	289	16	**555**	**302**	555	303	561	299
456.hmmer	16	**273**	**547**	273	547	273	546	16	244	612	**244**	**612**	243	613
458.sjeng	16	680	285	665	291	**675**	**287**	16	651	297	630	307	**649**	**298**
462.libquantum	16	125	2650	**125**	**2650**	125	2650	16	125	2650	**125**	**2650**	125	2650
464.h264ref	16	712	498	**705**	**502**	705	502	16	697	508	703	504	**701**	**505**
471.omnetpp	16	436	229	**435**	**230**	434	230	16	408	245	407	246	**408**	**245**
473.astar	16	**456**	**246**	460	244	452	249	16	**456**	**246**	460	244	452	249
483.xalancbmk	16	235	470	234	472	**234**	**471**	16	235	470	234	472	**234**	**471**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
Zone reclaim mode enabled with:
echo 1 > /proc/sys/vm/zone_reclaim_mode
```

Platform Notes

```
BIOS setting:
Operating Mode set to Maximum Performance
Sysinfo program /home/SPECcpu-new/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on x3650M4 Thu Jan 16 13:21:02 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2637 v2 @ 3.50GHz
      2 "physical id"s (chips)
      16 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
```

Continued on next page

Platform Notes (Continued)

```
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 4
         siblings  : 8
         physical 0: cores 1 2 3 4
         physical 1: cores 1 2 3 4
      cache size : 15360 KB

   From /proc/meminfo
      MemTotal:       264342644 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      Red Hat Enterprise Linux Server release 6.4 (Santiago)

   From /etc/*release* /etc/*version*
      redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
      system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

   uname -a:
      Linux x3650M4 2.6.32-358.18.1.el6.x86_64 #1 SMP Fri Aug 2 17:04:38 EDT 2013
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Jan 16 12:48

   SPEC is set to: /home/SPECcpu-new
      Filesystem     Type    Size  Used Avail Use% Mounted on
      /dev/mapper/vg_x3650m4-lv_home
                     ext4    313G  200G   97G  68% /home

   Additional information from dmidecode:
     BIOS IBM -[TESTBUILD-1.50]- 08/09/2013
     Memory:
      8x Not Specified Not Specified
      16x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank

   (End of data from sysinfo program)
  "Not Specified" memory information from dmidecode indicates unused DIMM slots.
  The BIOS IBM -[TESTBUILD-1.50] is equivalent to production version [VVE134TUS-1.51]
```

General Notes

```
  Environment variables set by runspec before the start of the run:
  LD_LIBRARY_PATH = "/home/SPECcpu-new/libs/32:/home/SPECcpu-new/libs/64:/home/SPECcpu-new/sh"

   Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
   memory using RedHat EL 6.4
   Transparent Huge Pages enabled with:
   echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Continued on next page

General Notes (Continued)

```
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m32`

C++ benchmarks:
`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`
`-Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

400.perlbench: `icc -m64`

Continued on next page

Peak Compiler Invocation (Continued)

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2)
-ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-unroll4 -auto-ilp32

462.libquantum: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

464.h264ref: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-unroll2 -ansi-alias`

C++ benchmarks:

471.omnetpp: `-xSSE4.2`(pass 2) `-prof-gen`(pass 1) `-ipo`(pass 2) `-O3`(pass 2) `-no-prec-div`(pass 2) `-prof-use`(pass 2) `-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap`

473.astar: `basepeak = yes`

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html`
`http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml`
`http://www.spec.org/cpu2006/flags/IBM-Platform-Flags-V1.2-IVB-A.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 20:25:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 February 2014.