SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885H v3 (Intel Xeon E7-4890 v2)

SPECint®_rate2006 = Not Run

SPECint_rate_base2006 = 2320

CPU2006 license: 13
Test sponsor: Huawei
Tested by: Huawei

Test date: Feb-2014
Hardware Availability: Feb-2014
Software Availability: Nov-2013

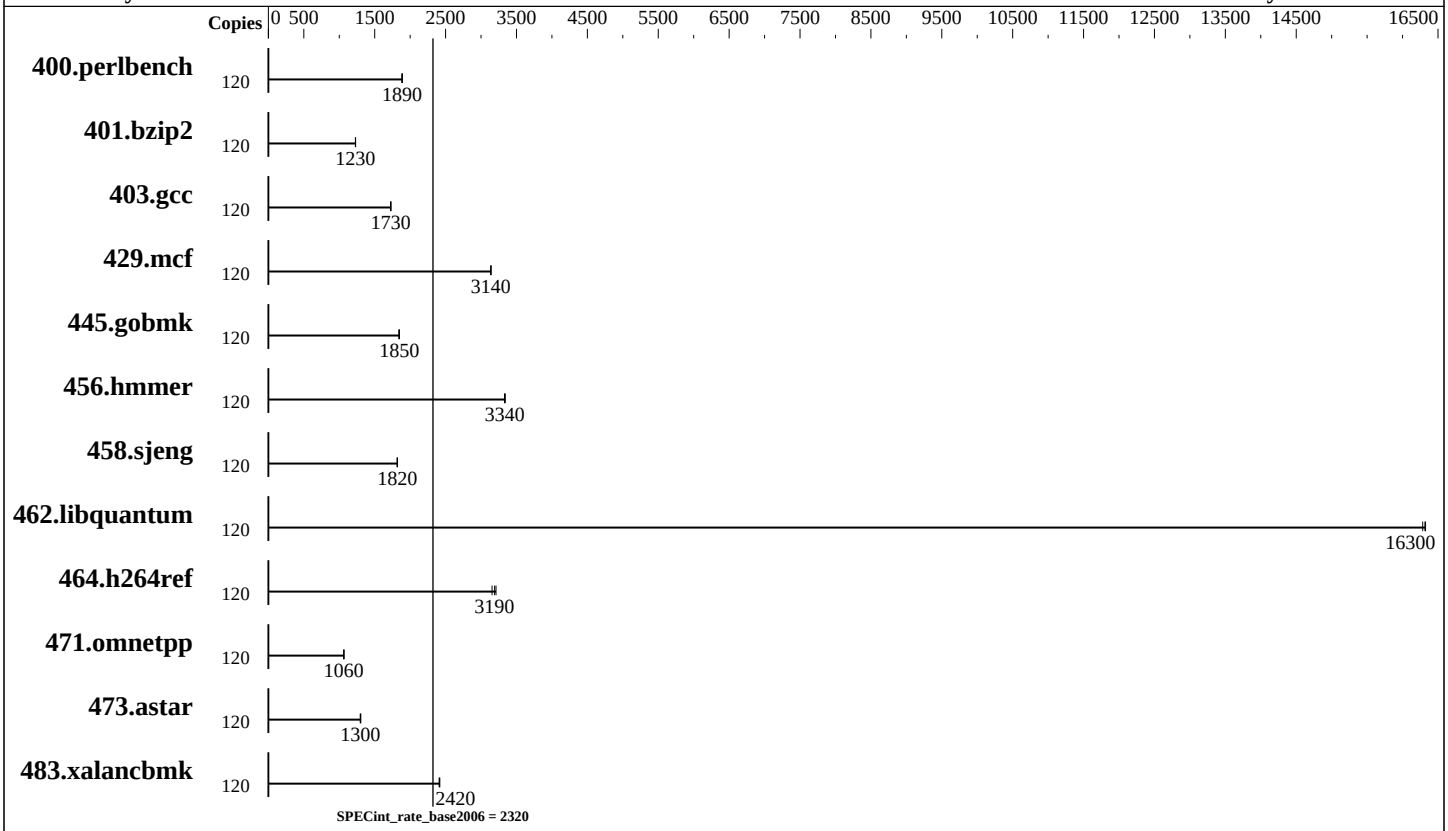

Hardware

CPU Name:	Intel Xeon E7-4890 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.40 GHz
CPU MHz:	2800
FPU:	Integrated
CPU(s) enabled:	60 cores, 4 chips, 15 cores/chip, 2 threads/core
CPU(s) orderable:	2,4 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	37.5 MB I+D on chip per chip
Other Cache:	None
Memory:	512 GB (64 x 8 GB 2Rx4 PC3-10600R-9, ECC)
Disk Subsystem:	1 x 300 GB SAS, 10 K RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

Huawei RH5885H v3 (Intel Xeon E7-4890 v2)

SPECint_rate2006 = Not Run

SPECint_rate_base2006 = 2320

CPU2006 license: 13
Test sponsor: Huawei
Tested by: Huawei

Test date: Feb-2014
Hardware Availability: Feb-2014
Software Availability: Nov-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	120	620	1890	**621**	**1890**	622	1880							
401.bzip2	120	941	1230	943	1230	**942**	**1230**							
403.gcc	120	**560**	**1730**	561	1720	558	1730							
429.mcf	120	**349**	**3140**	349	3140	349	3140							
445.gobmk	120	684	1840	681	1850	**681**	**1850**							
456.hmmer	120	335	3340	336	3330	**336**	**3340**							
458.sjeng	120	799	1820	798	1820	**798**	**1820**							
462.libquantum	120	**152**	**16300**	153	16300	152	16300							
464.h264ref	120	827	3210	**832**	**3190**	842	3160							
471.omnetpp	120	704	1060	**704**	**1060**	704	1060							
473.astar	120	647	1300	650	1300	**647**	**1300**							
483.xalancbmk	120	343	2420	**343**	**2420**	344	2410							

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
BIOS configuration:
Set Power Efficiency Mode to Performance
Set Lock_step to disabled
Baseboard Management Controller used to adjust the fan speed to 100%
Sysinfo program /spec/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on speccpu Sun Feb  9 20:10:41 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E7-4890 v2 @ 2.80GHz
      4 "physical id"s (chips)
      120 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
```

Continued on next page

Platform Notes (Continued)

```
      following excerpts from /proc/cpuinfo might not be reliable.  Use with
      caution.)
         cpu cores : 15
         siblings  : 30
         physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
         physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
         physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
         physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
      cache size : 38400 KB

   From /proc/meminfo
      MemTotal:       529098336 kB
      HugePages_Total:       0
      Hugepagesize:       2048 kB

   /usr/bin/lsb_release -d
      Red Hat Enterprise Linux Server release 6.5 (Santiago)

   From /etc/*release* /etc/*version*
      redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
      system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
      system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

   uname -a:
      Linux speccpu 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
      x86_64 x86_64 x86_64 GNU/Linux

   run-level 3 Feb 9 19:50

   SPEC is set to: /spec
      Filesystem     Type  Size  Used Avail Use% Mounted on
      /dev/sda1      ext4  241G  8.6G  220G   4% /

   Additional information from dmidecode:
     BIOS American Megatrends Inc. BLISV099 02/09/2014
     Memory:
      64x   8 GB
      12x Hynix HMT31GR7AFR4C-H9 8 GB 1333 MHz 2 rank
      52x Hynix HMT31GR7BFR4C-H9 8 GB 1333 MHz 2 rank
      32x NO DIMM NO DIMM

   (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64:/spec/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RedHat EL 6.4
  Transparent Huge Pages enabled with:
```

Continued on next page

General Notes (Continued)

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
Filesystem page cache cleared with:
echo 1>       /proc/sys/vm/drop_caches
runspec command invoked through numactl i.e.:
numactl --interleave=all runspec <etc>
```

Base Compiler Invocation

C benchmarks:
`icc -m32`

C++ benchmarks:
`icpc -m32`

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`
`-Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-revE.20121120.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 20:14:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 February 2014.