SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

Hitachi Compute Blade 520H (Intel Xeon E5-2670 v2)

SPECint®_rate2006 = 794

SPECint_rate_base2006 = 768

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Mar-2014
Hardware Availability: Feb-2014
Software Availability: Sep-2013

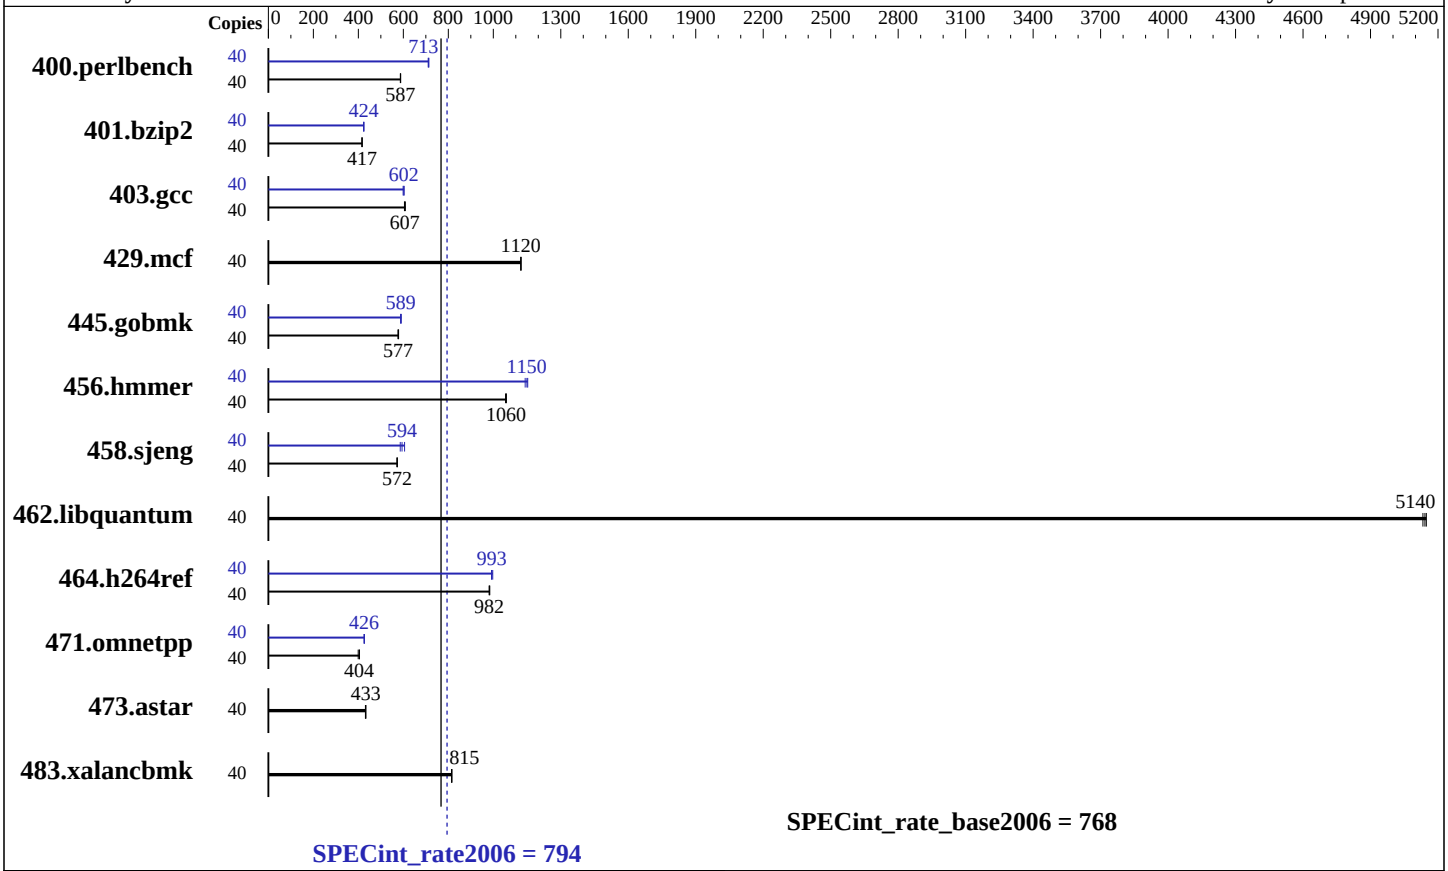

Hardware

CPU Name:	Intel Xeon E5-2670 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.30 GHz
CPU MHz:	2500
FPU:	Integrated
CPU(s) enabled:	20 cores, 2 chips, 10 cores/chip, 2 threads/core
CPU(s) orderable:	1, 2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem:	1 x 146 GB SAS, 15000 RPM
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.4 (Santiago) 2.6.32-358.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

Hitachi Compute Blade 520H (Intel Xeon E5-2670 v2)

SPECint_rate2006 = 794

SPECint_rate_base2006 = 768

CPU2006 license: 35
Test sponsor: HITACHI
Tested by: HITACHI

Test date: Mar-2014
Hardware Availability: Feb-2014
Software Availability: Sep-2013

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	40	664	588	666	587	**665**	**587**	40	550	711	548	713	**548**	**713**
401.bzip2	40	926	417	928	416	**926**	**417**	40	909	425	912	423	**910**	**424**
403.gcc	40	529	609	**531**	**607**	532	605	40	**535**	**602**	534	603	538	599
429.mcf	40	**325**	**1120**	325	1120	325	1120	40	**325**	**1120**	325	1120	325	1120
445.gobmk	40	728	577	**727**	**577**	725	579	40	714	588	710	591	**712**	**589**
456.hmmer	40	**353**	**1060**	353	1060	354	1050	40	**325**	**1150**	324	1150	327	1140
458.sjeng	40	846	572	844	573	**846**	**572**	40	**815**	**594**	826	586	799	606
462.libquantum	40	161	5130	161	5150	**161**	**5140**	40	161	5130	161	5150	**161**	**5140**
464.h264ref	40	901	982	**901**	**982**	899	984	40	892	992	**891**	**993**	887	997
471.omnetpp	40	626	399	**619**	**404**	617	405	40	586	427	587	426	**586**	**426**
473.astar	40	**649**	**433**	651	431	648	433	40	**649**	**433**	651	431	648	433
483.xalancbmk	40	339	815	**339**	**815**	338	816	40	339	815	**339**	**815**	338	816

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on localhost.localdomain Tue Mar  4 17:55:10 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2670 v2 @ 2.50GHz
      2 "physical id"s (chips)
      40 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 10
      siblings  : 20
```

Continued on next page

Platform Notes (Continued)

```
        physical 0: cores 0 1 2 3 4 8 9 10 11 12
        physical 1: cores 0 1 2 3 4 8 9 10 11 12
     cache size : 25600 KB

  From /proc/meminfo
     MemTotal:       132334256 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.4 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux localhost.localdomain 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41
     EST 2013 x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 Mar 4 17:52

  SPEC is set to: /home/cpu2006
     Filesystem     Type    Size  Used Avail Use% Mounted on
     /dev/mapper/VolGroup-lv_root
                    ext4    133G   16G  110G  13% /

  Additional information from dmidecode:
    BIOS HITACHI EP1043 02/04/2014
    Memory:
     16x Not Specified Not Specified
     8x Samsung M393B2G70QH0-CMA 16 GB 1867 MHz 2 rank

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RedHat EL 6.4
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
  Filesystem page cache cleared with:
  echo 1>       /proc/sys/vm/drop_caches
  runspec command invoked through numactl i.e.:
  numactl --interleave=all runspec <etc>
  BladeSymphony BS520H and Hitachi Compute Blade 520H are electronically equivalent.
  The results have been measured on a BladeSymphony BS520H
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
```
icc  -m32
```

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
```
icpc -m32
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

Continued on next page

Peak Optimization Flags (Continued)

483.xalancbmk: `basepeak = yes`

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html`
`http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml`
`http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 20:43:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 25 March 2014.