



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp®\_rate2006 = 557

ProLiant DL380p Gen8  
(2.60 GHz, Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = 544

CPU2006 license: 3


Test date: Oct-2013

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2013

Tested by: Hewlett-Packard Company

Software Availability: Sep-2013

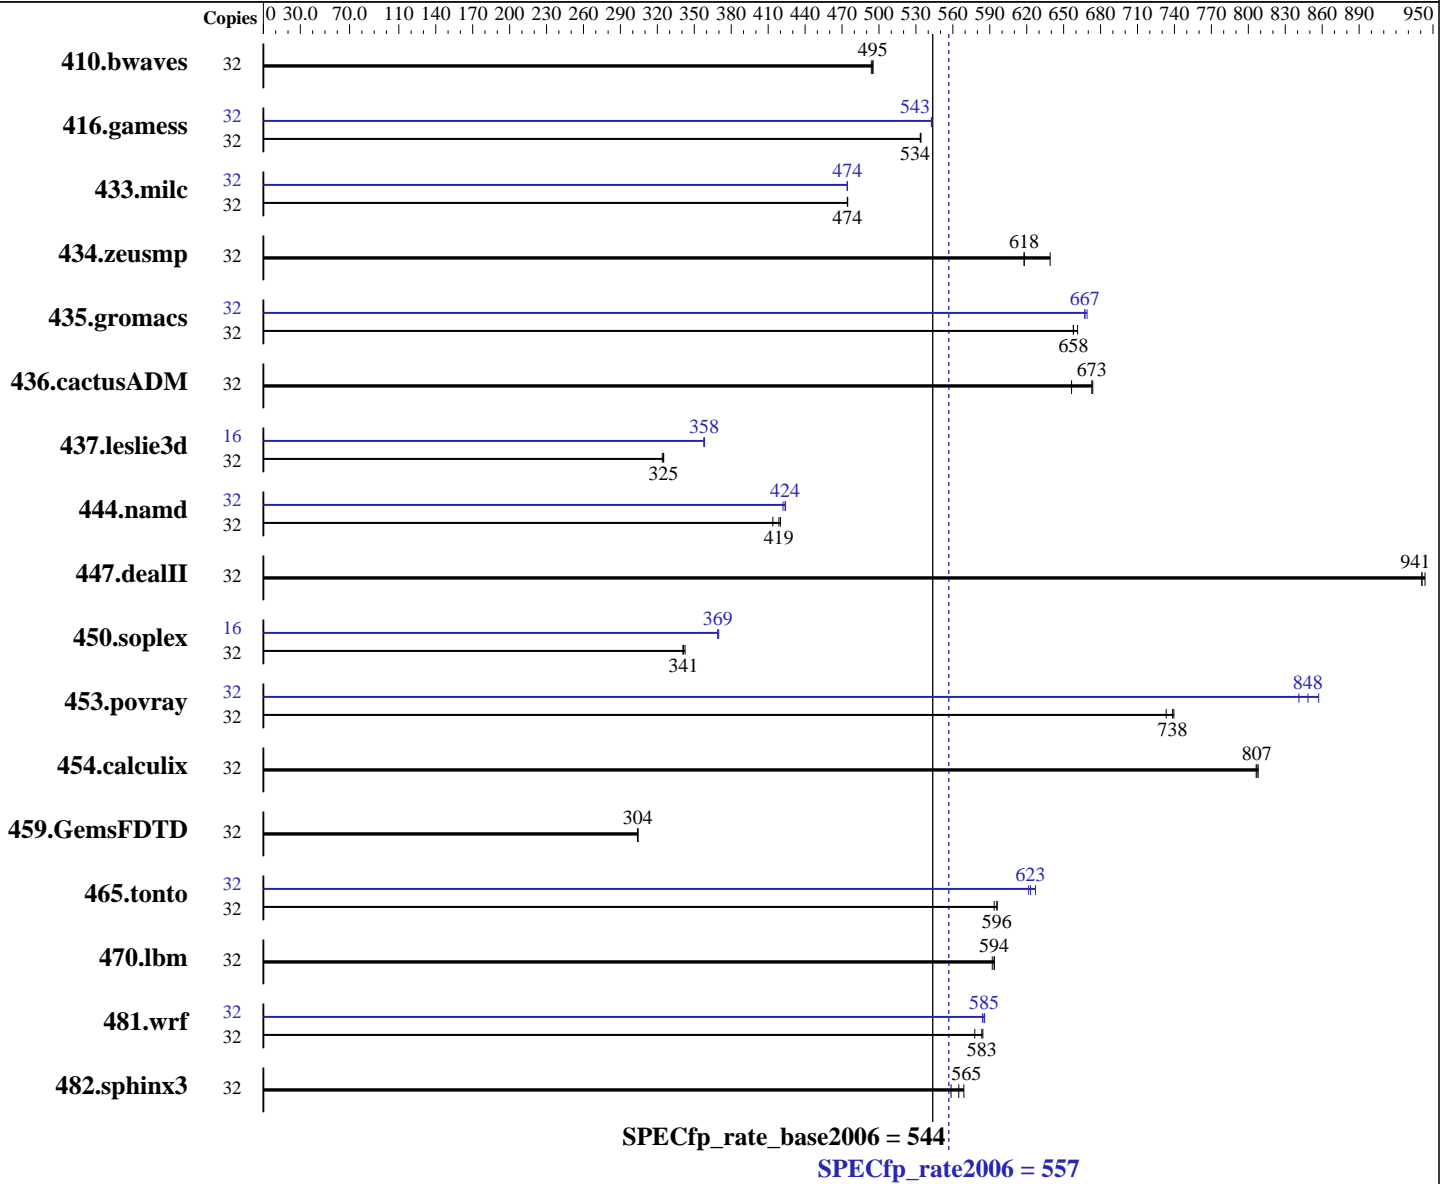

**Hardware**

CPU Name: Intel Xeon E5-2650 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.40 GHz  
 CPU MHz: 2600  
 FPU: Integrated  
 CPU(s) enabled: 16 cores, 2 chips, 8 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

*Continued on next page*

**Software**

Operating System: Red Hat Enterprise Linux Server release 6.4  
 Kernel 2.6.32-358.el6.x86\_64  
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;  
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux  
 Auto Parallel: No  
 File System: ext4  
 System State: Run level 3 (multi-user)

*Continued on next page*



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = **557**

ProLiant DL380p Gen8  
(2.60 GHz, Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = **544**

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Oct-2013  
Hardware Availability: Sep-2013  
Software Availability: Sep-2013

L3 Cache: 20 MB I+D on chip per chip  
Other Cache: None  
Memory: 128 GB (16 x 8 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 300 GB GB 10 K SAS, RAID 0  
Other Hardware: None

Base Pointers: 32/64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	32	<b>879</b>	<b>495</b>	878	495	881	494	32	<b>879</b>	<b>495</b>	878	495	881	494
416.gamess	32	1173	534	<b>1174</b>	<b>534</b>	1174	534	32	1154	543	1155	543	<b>1154</b>	<b>543</b>
433.milc	32	<b>619</b>	<b>474</b>	619	475	619	474	32	619	474	620	474	<b>619</b>	<b>474</b>
434.zeusmp	32	456	639	471	618	<b>471</b>	<b>618</b>	32	456	639	471	618	<b>471</b>	<b>618</b>
435.gromacs	32	347	658	345	661	<b>347</b>	<b>658</b>	32	<b>342</b>	<b>667</b>	342	667	341	669
436.cactusADM	32	568	674	<b>568</b>	<b>673</b>	583	656	32	568	674	<b>568</b>	<b>673</b>	583	656
437.leslie3d	32	<b>926</b>	<b>325</b>	928	324	925	325	16	<b>420</b>	<b>358</b>	420	358	420	358
444.namd	32	620	414	<b>613</b>	<b>419</b>	611	420	32	<b>606</b>	<b>424</b>	605	424	608	422
447.dealII	32	388	944	<b>389</b>	<b>941</b>	389	941	32	388	944	<b>389</b>	<b>941</b>	389	941
450.soplex	32	783	341	779	343	<b>782</b>	<b>341</b>	16	361	370	<b>362</b>	<b>369</b>	362	369
453.povray	32	232	733	<b>231</b>	<b>738</b>	230	740	32	199	857	202	841	<b>201</b>	<b>848</b>
454.calculix	32	327	808	327	806	<b>327</b>	<b>807</b>	32	327	808	327	806	<b>327</b>	<b>807</b>
459.GemsFDTD	32	<b>1116</b>	<b>304</b>	1116	304	1117	304	32	<b>1116</b>	<b>304</b>	1116	304	1117	304
465.tonto	32	530	594	<b>529</b>	<b>596</b>	528	596	32	507	622	<b>505</b>	<b>623</b>	502	627
470.lbm	32	743	592	<b>741</b>	<b>594</b>	741	594	32	743	592	<b>741</b>	<b>594</b>	741	594
481.wrf	32	612	584	<b>613</b>	<b>583</b>	619	578	32	610	586	612	584	<b>611</b>	<b>585</b>
482.sphinx3	32	1096	569	1117	559	<b>1104</b>	<b>565</b>	32	1096	569	1117	559	<b>1104</b>	<b>565</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The numactl mechanism was used to bind copies to processors. The config file option 'submit' was used to generate numactl commands to bind each copy to a specific processor. For details, please see the config file.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"  
Transparent Huge Pages enabled with:  
echo always > /sys/kernel/mm/redhat\_transparent\_hugepage/enabled  
Filesystem page cache cleared with:  
echo 1 > /proc/sys/vm/drop\_caches  
runspec command invoked through numactl i.e.:  
numactl --interleave=all runspec <etc>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 557

ProLiant DL380p Gen8  
(2.60 GHz, Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = 544

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2013  
**Hardware Availability:** Sep-2013  
**Software Availability:** Sep-2013

### Platform Notes

#### BIOS Configuration:

HP Power Profile set to Maximum Performance  
Energy/Performance Bias is set to Maximum Performance  
Memory Power Savings Mode set to Maximum Performance  
Thermal Configuration set to Maximum Cooling  
Collaborative Power Control set to Disabled  
Dynamic Power Capping Functionality set to Disabled  
Processor Power and Utilization Monitoring set to Disabled  
Memory Refresh Rate set to 1x

Sysinfo program /cpu2006/config/sysinfo.rev6818  
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191  
running on DL380p-Gen8-0SB Thu Oct 24 01:40:51 2013

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```
From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-2650 v2 @ 2.60GHz
 2 "physical id"s (chips)
 32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores : 8
  siblings  : 16
  physical 0: cores 0 1 2 3 4 5 6 7
  physical 1: cores 0 1 2 3 4 5 6 7
cache size : 20480 KB
```

```
From /proc/meminfo
MemTotal: 132119284 kB
HugePages_Total: 0
Hugepagesize: 2048 kB
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.4 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux DL380p-Gen8-0SB 2.6.32-358.el6.x86_64 #1 SMP Tue Jan 29 11:47:41 EST
2013 x86_64 x86_64 x86_64 GNU/Linux
```

run-level 3 Oct 23 13:42

```
SPEC is set to: /cpu2006
Filesystem      Type      Size  Used Avail Use% Mounted on
/dev/sda3       ext4      273G  181G   79G  70% /
```

Additional information from dmidecode:  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 557**

ProLiant DL380p Gen8  
(2.60 GHz, Intel Xeon E5-2650 v2)

**SPECfp\_rate\_base2006 = 544**

**CPU2006 license:** 3

**Test date:** Oct-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Platform Notes (Continued)

BIOS HP P70 09/08/2013

Memory:

16x HP 712382-071 8 GB 1866 MHz 2 rank

8x UNKNOWN NOT AVAILABLE

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 128 GB and the dmidecode description should have one line reading as:

16x HP 712382-071 8 GB 1866 MHz 2 rank

## General Notes

Environment variables set by runspec before the start of the run:

LD\_LIBRARY\_PATH = "/cpu2006/libs/32:/cpu2006/libs/64:/cpu2006/sh"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

444.namd: -DSPEC\_CPU\_LP64

447.dealII: -DSPEC\_CPU\_LP64

450.soplex: -DSPEC\_CPU\_LP64

453.povray: -DSPEC\_CPU\_LP64

454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 557**

ProLiant DL380p Gen8  
(2.60 GHz, Intel Xeon E5-2650 v2)

**SPECfp\_rate\_base2006 = 544**

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2013  
**Hardware Availability:** Sep-2013  
**Software Availability:** Sep-2013

## Base Portability Flags (Continued)

459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

C++ benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

Fortran benchmarks:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch

Benchmarks using both Fortran and C:  
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -auto-p32 -ansi-alias  
-opt-mem-layout-trans=3

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks (except as noted below):  
icpc -m64  
450.soplex: icpc -m32

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 557**

ProLiant DL380p Gen8  
(2.60 GHz, Intel Xeon E5-2650 v2)

**SPECfp\_rate\_base2006 = 544**

**CPU2006 license:** 3

**Test date:** Oct-2013

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2013

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2013

## Peak Portability Flags (Continued)

```

433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -auto-ilp32

```

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

```

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -fno-alias -auto-ilp32

```

447.dealII: basepeak = yes

```

450.soplex: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -opt-malloc-options=3

```

```

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)
-prof-use(pass 2) -unroll4 -ansi-alias

```

Fortran benchmarks:

410.bwaves: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 557

ProLiant DL380p Gen8  
(2.60 GHz, Intel Xeon E5-2650 v2)

SPECfp\_rate\_base2006 = 544

**CPU2006 license:** 3  
**Test sponsor:** Hewlett-Packard Company  
**Tested by:** Hewlett-Packard Company

**Test date:** Oct-2013  
**Hardware Availability:** Sep-2013  
**Software Availability:** Sep-2013

## Peak Optimization Flags (Continued)

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: -xAVX -ipo -O3 -no-prec-div -opt-prefetch

459.GemsFDTD: basepeak = yes

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto  
-inline-calloc -opt-malloc-options=3

Benchmarks using both Fortran and C:

435.gromacs: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -opt-mem-layout-trans=3(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: -xAVX -ipo -O3 -no-prec-div -auto-ilp32

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>  
<http://www.spec.org/cpu2006/flags/HP-Platform-Flags-Intel-V1.2-revD.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 23:55:00 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 April 2014.