



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge M820 (Intel Xeon E5-4627 v2, 3.30 GHz)

SPECfp<sup>®</sup>2006 = 85.7

SPECfp\_base2006 = 81.3

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

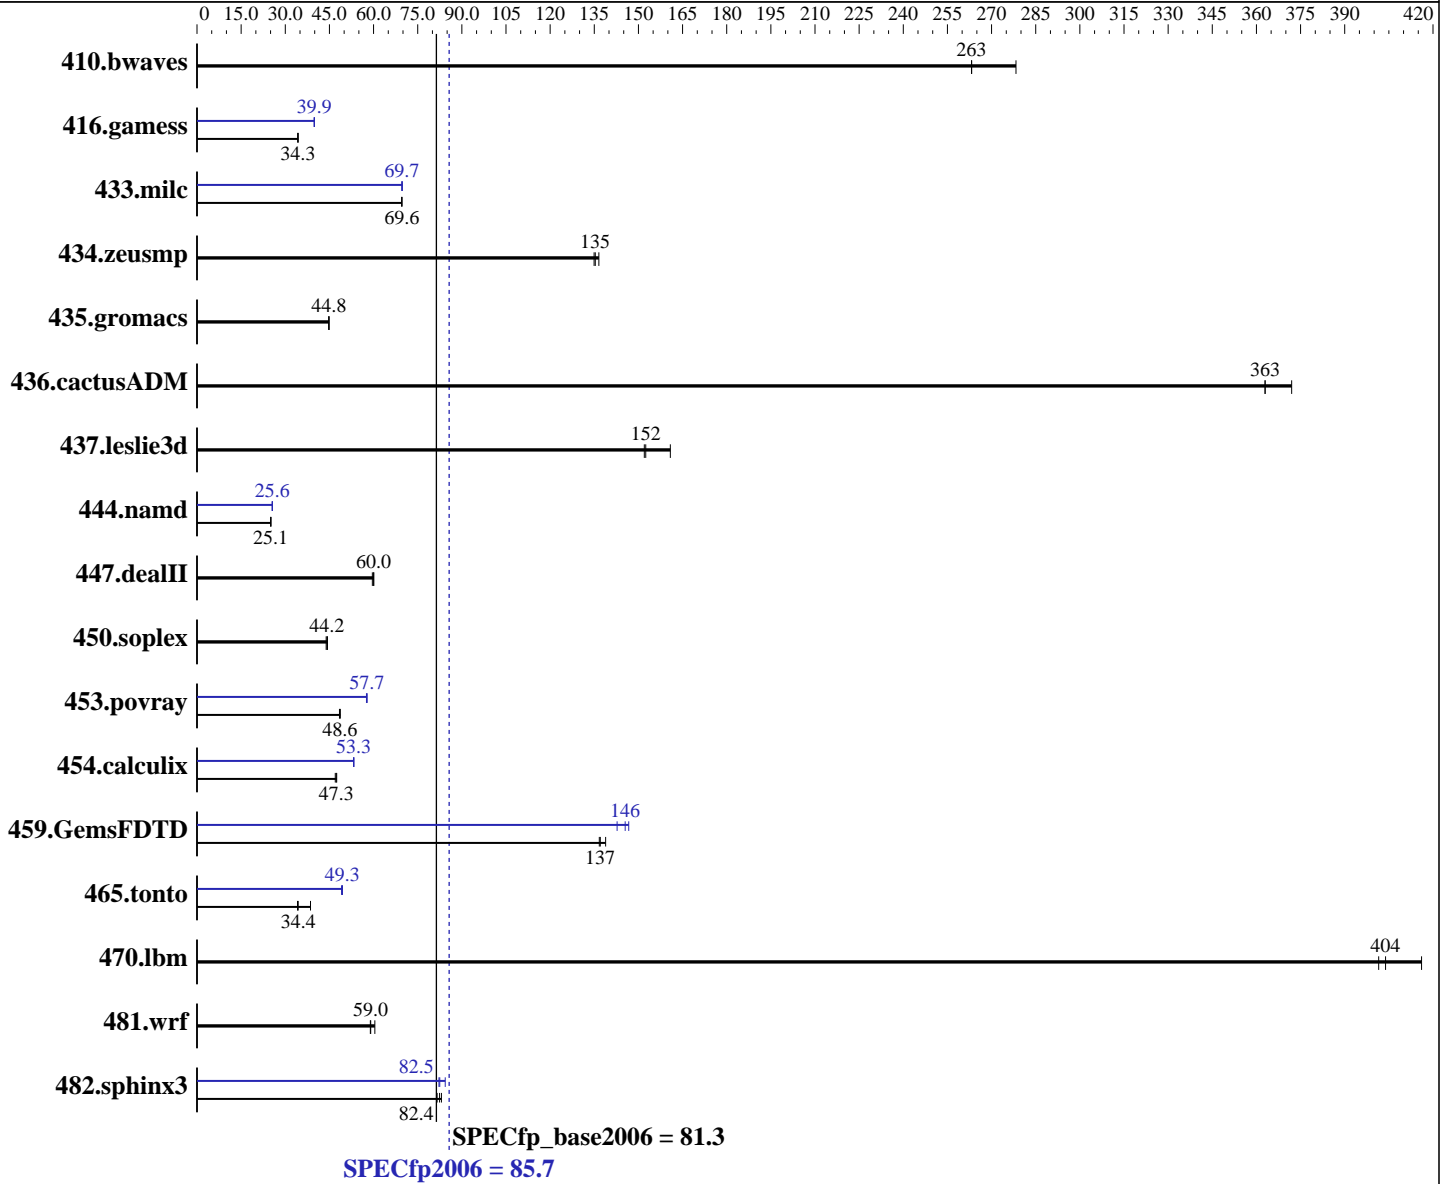

Hardware	
CPU Name:	Intel Xeon E5-4627 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3300
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip
CPU(s) orderable:	4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core

Continued on next page

Software	
Operating System:	SUSE Linux Enterprise Server 11 (x86_64) SUSE Linux Enterprise Server 11 (x86_64) 3.0.76-0.11-default
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux; Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
Auto Parallel:	Yes
File System:	ext2

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

PowerEdge M820 (Intel Xeon E5-4627 v2, 3.30 GHz)

SPECfp2006 = **85.7**

SPECfp\_base2006 = **81.3**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2014

Hardware Availability: Mar-2014

Software Availability: Aug-2013

L3 Cache: 16 MB I+D on chip per chip  
Other Cache: None  
Memory: 512 GB (32 x 16 GB 2Rx4 PC3-14900R-13, ECC)  
Disk Subsystem: 1 x 1TB 7200 RPM Near-Line SAS  
Other Hardware: None

System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	48.8	278	<b>51.6</b>	<b>263</b>	51.6	263	48.8	278	<b>51.6</b>	<b>263</b>	51.6	263
416.gamess	572	34.2	<b>570</b>	<b>34.3</b>	570	34.4	492	39.8	491	39.9	<b>491</b>	<b>39.9</b>
433.milc	132	69.6	132	69.6	<b>132</b>	<b>69.6</b>	132	69.8	<b>132</b>	<b>69.7</b>	132	69.6
434.zeusmp	<b>67.2</b>	<b>135</b>	66.6	137	67.4	135	<b>67.2</b>	<b>135</b>	66.6	137	67.4	135
435.gromacs	<b>159</b>	<b>44.8</b>	159	44.9	160	44.8	<b>159</b>	<b>44.8</b>	159	44.9	160	44.8
436.cactusADM	32.1	372	32.9	363	<b>32.9</b>	<b>363</b>	32.1	372	32.9	363	<b>32.9</b>	<b>363</b>
437.leslie3d	<b>61.6</b>	<b>152</b>	61.8	152	58.4	161	<b>61.6</b>	<b>152</b>	61.8	152	58.4	161
444.namd	320	25.1	<b>320</b>	<b>25.1</b>	320	25.1	313	25.6	314	25.6	<b>313</b>	<b>25.6</b>
447.dealII	190	60.1	192	59.6	<b>191</b>	<b>60.0</b>	190	60.1	192	59.6	<b>191</b>	<b>60.0</b>
450.soplex	<b>189</b>	<b>44.2</b>	190	43.9	188	44.3	<b>189</b>	<b>44.2</b>	190	43.9	188	44.3
453.povray	109	48.7	110	48.4	<b>110</b>	<b>48.6</b>	<b>92.2</b>	<b>57.7</b>	92.1	57.8	92.4	57.6
454.calculix	174	47.5	176	47.0	<b>174</b>	<b>47.3</b>	155	53.3	<b>155</b>	<b>53.3</b>	155	53.2
459.GemsFDTD	77.6	137	76.4	139	<b>77.4</b>	<b>137</b>	74.3	143	<b>72.9</b>	<b>146</b>	72.3	147
465.tonto	<b>286</b>	<b>34.4</b>	255	38.6	288	34.2	200	49.1	199	49.4	<b>199</b>	<b>49.3</b>
470.lbm	34.2	402	<b>34.0</b>	<b>404</b>	33.0	416	34.2	402	<b>34.0</b>	<b>404</b>	33.0	416
481.wrf	190	58.9	<b>189</b>	<b>59.0</b>	185	60.4	190	58.9	<b>189</b>	<b>59.0</b>	185	60.4
482.sphinx3	235	83.1	<b>236</b>	<b>82.4</b>	239	81.6	231	84.4	<b>236</b>	<b>82.5</b>	237	82.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

Virtualization Technology disabled  
Execute Disable disabled  
Logical Processor enabled  
System Profile set to Custom  
CPU Power Management set to Maximum Performance  
Memory Frequency set to Maximum Performance  
Turbo Boost enabled  
C1E enabled  
C States enabled  
Monitor/Mwait enabled

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp2006 = 85.7**

PowerEdge M820 (Intel Xeon E5-4627 v2, 3.30 GHz)

**SPECfp\_base2006 = 81.3**

**CPU2006 license:** 55

**Test date:** Mar-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** Aug-2013

## Platform Notes (Continued)

```

Memory Patrol Scrub set to disabled
Memory Refresh Rate set to 1x
Memory Operating Voltage set to Auto
Collaborative CPU Performance Control disabled
Sysinfo program /root/cpu2006-1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on linux Mon Mar 3 17:56:46 2014

```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name : Intel(R) Xeon(R) CPU E5-4627 v2 @ 3.30GHz
4 "physical id"s (chips)
32 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 8
siblings : 8
physical 0: cores 0 1 2 3 4 5 6 7
physical 1: cores 0 1 2 3 4 5 6 7
physical 2: cores 0 1 2 3 4 5 6 7
physical 3: cores 0 1 2 3 4 5 6 7
cache size : 16384 KB

```

```

From /proc/meminfo
MemTotal: 529392220 kB
HugePages_Total: 0
Hugepagesize: 2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3

```

```

uname -a:
Linux linux 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013 (ccab990)
x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Mar 3 12:29 last=S

```

SPEC is set to: /root/cpu2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda2       ext2  909G  9.5G  898G   2% /

```

Additional information from dmidecode:  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

**SPECfp2006 = 85.7**

PowerEdge M820 (Intel Xeon E5-4627 v2,  
3.30 GHz)

**SPECfp\_base2006 = 81.3**

**CPU2006 license:** 55

**Test date:** Mar-2014

**Test sponsor:** Dell Inc.

**Hardware Availability:** Mar-2014

**Tested by:** Dell Inc.

**Software Availability:** Aug-2013

## Platform Notes (Continued)

BIOS Dell Inc. 2.0.24 01/21/2014

Memory:

8x 002C04B3002C 36JSF2G72PZ-1G9E1 16 GB 1866 MHz

21x 00CE00B300CE M393B2G70DB0-CMA 16 GB 1866 MHz

3x 00CE04B300CE M393B2G70DB0-CMA 16 GB 1866 MHz

(End of data from sysinfo program)

## General Notes

Environment variables set by runspec before the start of the run:

```
LD_LIBRARY_PATH = "/root/cpu2006-1.2/libs/32:/root/cpu2006-1.2/libs/64:/root/cpu2006-1.2/sh"
OMP_NUM_THREADS = "32"
```

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB  
memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/transparent_hugepage/enabled
```

Filesystem page cache cleared with:

```
echo 1 > /proc/sys/vm/drop_caches
```

runspec command invoked through numactl i.e.:

```
numactl --interleave=all runspec <etc>
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main

436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main

437.leslie3d: -DSPEC\_CPU\_LP64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge M820 (Intel Xeon E5-4627 v2,  
3.30 GHz)

**SPECfp2006 = 85.7**

**SPECfp\_base2006 = 81.3**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Mar-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Aug-2013

## Base Portability Flags (Continued)

```

444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```

## Base Optimization Flags

```

C benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

```

## Peak Compiler Invocation

```

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

```

## Peak Portability Flags

Same as Base Portability Flags



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge M820 (Intel Xeon E5-4627 v2,  
3.30 GHz)

**SPECfp2006 = 85.7**

**SPECfp\_base2006 = 81.3**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Mar-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Aug-2013

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias  
-parallel

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Dell Inc.**

PowerEdge M820 (Intel Xeon E5-4627 v2,  
3.30 GHz)

**SPECfp2006 = 85.7**

**SPECfp\_base2006 = 81.3**

**CPU2006 license:** 55

**Test sponsor:** Dell Inc.

**Tested by:** Dell Inc.

**Test date:** Mar-2014

**Hardware Availability:** Mar-2014

**Software Availability:** Aug-2013

## Peak Optimization Flags (Continued)

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>

<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 22:41:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 8 April 2014.