



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

SPECfp®2006 = 97.3

Compute Blade 520X (Intel Xeon E7-4860 v2)

SPECfp_base2006 = 92.6

CPU2006 license: 35


Test date: Apr-2014

Test sponsor: HITACHI

Hardware Availability: Apr-2014

Tested by: HITACHI

Software Availability: Sep-2013

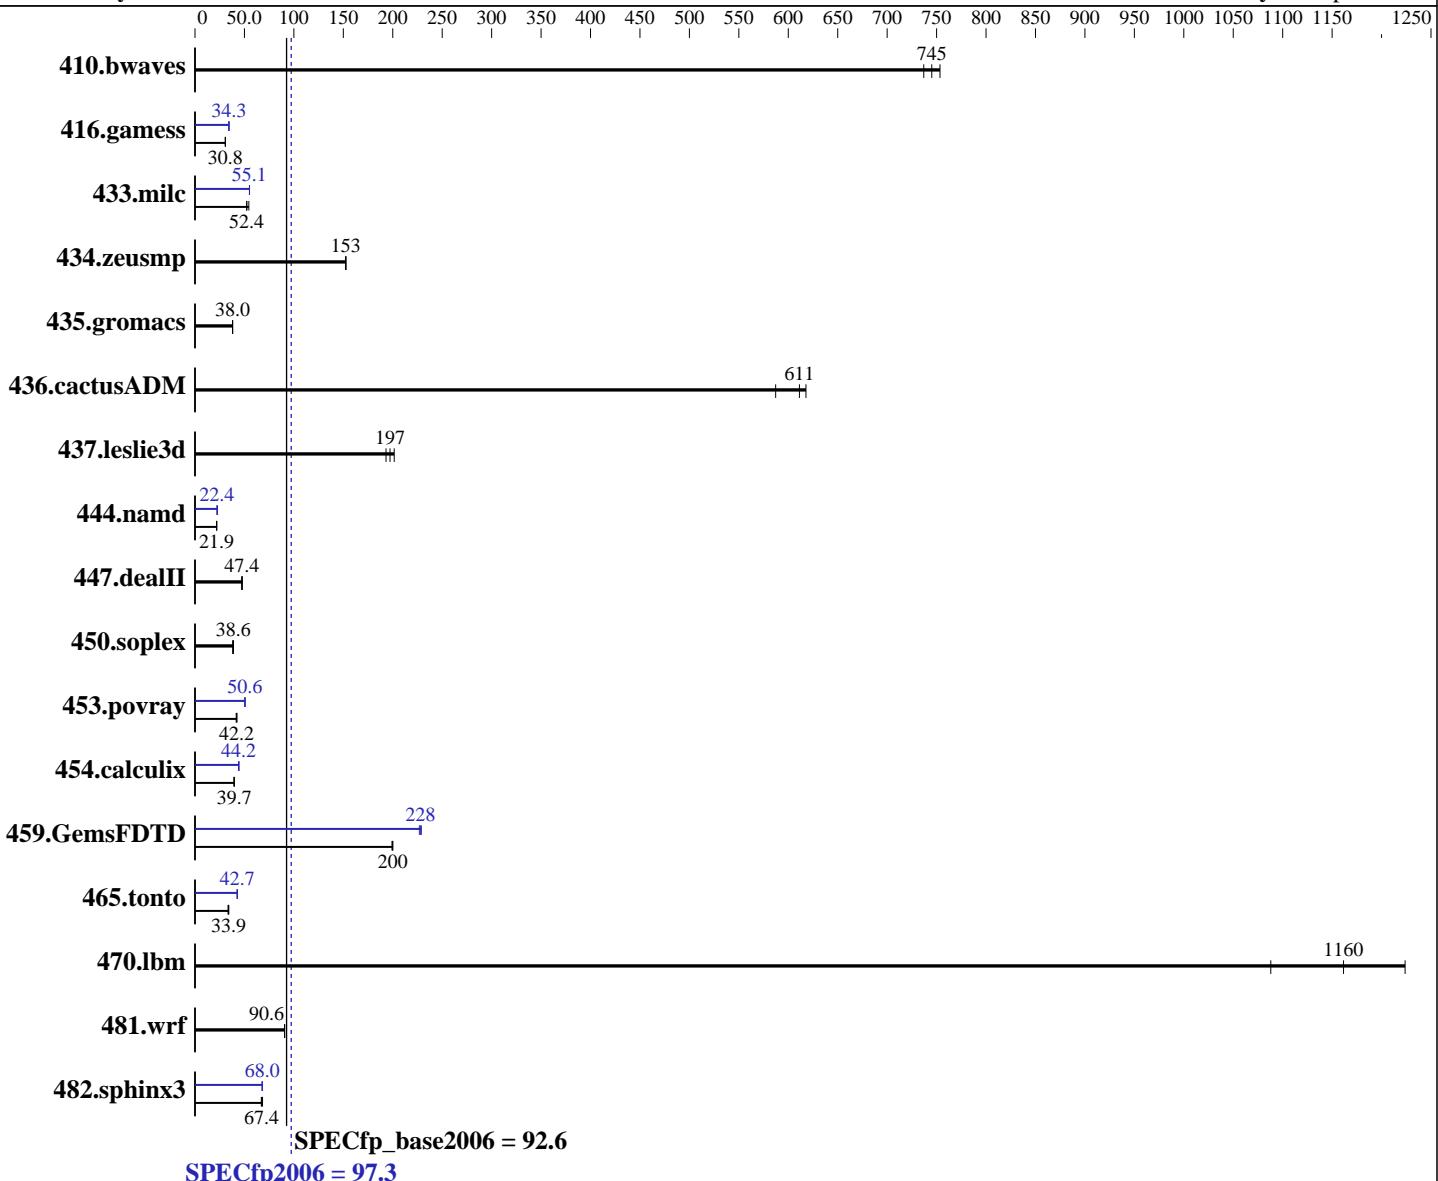

Hardware

CPU Name: Intel Xeon E7-4860 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 48 cores, 4 chips, 12 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)
 Compiler: 2.6.32-431.el6.x86_64
 Auto Parallel: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 File System: Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Software: Yes
 ext4

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-4860 v2)

SPECfp2006 = 97.3

CPU2006 license: 35

Test date: Apr-2014

Test sponsor: HITACHI

Hardware Availability: Apr-2014

Tested by: HITACHI

Software Availability: Sep-2013

L3 Cache: 30 MB I+D on chip per chip
 Other Cache: None
 Memory: 1 TB (64 x 16 GB 2Rx4 PC3L-12800R-11, ECC, running at 1333 MHz)
 Disk Subsystem: 2 x 300 GB SAS, 15000 RPM
 Other Hardware: None

System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit
 Other Software: none

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	18.4	737	<u>18.2</u>	<u>745</u>	18.0	753	18.4	737	<u>18.2</u>	<u>745</u>	18.0	753
416.gamess	640	30.6	636	30.8	<u>637</u>	<u>30.8</u>	570	34.3	571	34.3	<u>571</u>	<u>34.3</u>
433.milc	169	54.5	<u>175</u>	<u>52.4</u>	175	52.3	166	55.1	167	55.1	<u>167</u>	<u>55.1</u>
434.zeusmp	59.7	153	59.7	153	<u>59.7</u>	<u>153</u>	59.7	153	59.7	153	<u>59.7</u>	<u>153</u>
435.gromacs	<u>188</u>	<u>38.0</u>	188	38.0	188	38.0	<u>188</u>	<u>38.0</u>	188	38.0	188	38.0
436.cactusADM	19.3	618	20.3	587	<u>19.5</u>	<u>611</u>	19.3	618	20.3	587	<u>19.5</u>	<u>611</u>
437.leslie3d	46.7	201	48.7	193	<u>47.7</u>	<u>197</u>	46.7	201	48.7	193	<u>47.7</u>	<u>197</u>
444.namd	366	21.9	<u>366</u>	<u>21.9</u>	366	21.9	<u>358</u>	<u>22.4</u>	358	22.4	358	22.4
447.dealII	239	47.8	<u>241</u>	<u>47.4</u>	241	47.4	239	47.8	<u>241</u>	<u>47.4</u>	241	47.4
450.soplex	<u>216</u>	<u>38.6</u>	215	38.9	219	38.1	<u>216</u>	<u>38.6</u>	215	38.9	219	38.1
453.povray	126	42.3	128	41.7	<u>126</u>	<u>42.2</u>	106	50.3	<u>105</u>	<u>50.6</u>	105	50.7
454.calculix	209	39.4	208	39.7	<u>208</u>	<u>39.7</u>	186	44.4	187	44.2	<u>186</u>	<u>44.2</u>
459.GemsFDTD	53.3	199	53.1	200	<u>53.1</u>	<u>200</u>	46.8	227	<u>46.6</u>	<u>228</u>	46.4	229
465.tonto	294	33.4	<u>290</u>	<u>33.9</u>	288	34.2	231	42.7	230	42.8	<u>230</u>	<u>42.7</u>
470.lbm	12.6	1090	<u>11.8</u>	<u>1160</u>	11.2	1220	12.6	1090	<u>11.8</u>	<u>1160</u>	11.2	1220
481.wrf	123	90.6	<u>123</u>	<u>90.6</u>	123	90.6	123	90.6	<u>123</u>	<u>90.6</u>	123	90.6
482.sphinx3	<u>289</u>	<u>67.4</u>	291	67.1	285	68.3	<u>287</u>	<u>68.0</u>	287	68.0	287	68.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

```
Sysinfo program /home/cpu2006/config/sysinfo.rev6818
$Rev: 6818 $ $Date::: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
running on RHEL6.5x86_64 Tue Apr 15 14:03:46 2014
```

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see:
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-4860 v2)

SPECfp2006 = 97.3

CPU2006 license: 35

Test date: Apr-2014

Test sponsor: HITACHI

Hardware Availability: Apr-2014

Tested by: HITACHI

Software Availability: Sep-2013

Platform Notes (Continued)

```
model name : Intel(R) Xeon(R) CPU E7-4860 v2 @ 2.60GHz
        4 "physical id"s (chips)
        96 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
cpu cores : 12
siblings : 24
physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
cache size : 30720 KB
```

```
From /proc/meminfo
MemTotal:      1058309196 kB
HugePages_Total:      0
Hugepagesize:     2048 kB
```

```
/usr/bin/lsb_release -d
Red Hat Enterprise Linux Server release 6.5 (Santiago)
```

```
From /etc/*release* /etc/*version*
redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server
```

```
uname -a:
Linux RHEL6.5x86_64 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013
x86_64 x86_64 x86_64 GNU/Linux
```

```
run-level 3 Apr 15 12:17
```

```
SPEC is set to: /home/cpu2006
Filesystem           Type  Size  Used Avail Use% Mounted on
/dev/mapper/vg_rhel6-lv_home ext4  221G  5.4G  205G   3% /home
```

```
Additional information from dmidecode:
```

```
BIOS HITACHI 06-02 04/04/2014
Memory:
32x NO DIMM Unknown
1x Samsung 393B2G7 BH0 YH9 16 GB 1333 MHz 2 rank
3x Samsung M393B2G7 BH0 YK0 16 GB 1333 MHz 2 rank
13x Samsung M393B2G70BH0-YK0 16 GB 1333 MHz 2 rank
47x Samsung M393B2G70QH0-YK0 16 GB 1333 MHz 2 rank
```

```
(End of data from sysinfo program)
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-4860 v2)

SPECfp2006 = 97.3

CPU2006 license: 35

Test date: Apr-2014

Test sponsor: HITACHI

Hardware Availability: Apr-2014

Tested by: HITACHI

Software Availability: Sep-2013

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/home/cpu2006/libs/32:/home/cpu2006/libs/64:/home/cpu2006/sh"

OMP_NUM_THREADS = "48"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-4860 v2)

SPECfp2006 = 97.3

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2014

Hardware Availability: Apr-2014

Software Availability: Sep-2013

Base Optimization Flags

C benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
```

C++ benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias
```

Fortran benchmarks:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch
```

Benchmarks using both Fortran and C:

```
-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias
```

Peak Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

```
433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32  
-ansi-alias
```

```
470.lbm: basepeak = yes
```

```
482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll12 -ansi-alias  
-parallel
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-4860 v2)

SPECfp2006 = 97.3

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2014

Hardware Availability: Apr-2014

Software Availability: Sep-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

```
444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
           -no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
           -auto-ilp32

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias
```

Fortran benchmarks:

```
410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
             -inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
                -no-prec-div(pass 2) -prof-use(pass 2) -unroll2
                -inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
             -no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
             -opt-malloc-options=3 -auto -unroll4
```

Benchmarks using both Fortran and C:

```
435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.html>
<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64-revC.xml>
<http://www.spec.org/cpu2006/flags/PlatformHitachi-V1.2.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

HITACHI

Compute Blade 520X (Intel Xeon E7-4860 v2)

SPECfp2006 = 97.3

SPECfp_base2006 = 92.6

CPU2006 license: 35

Test sponsor: HITACHI

Tested by: HITACHI

Test date: Apr-2014

Hardware Availability: Apr-2014

Software Availability: Sep-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.

Report generated on Thu Jul 24 22:53:10 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 27 May 2014.