



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp[®]2006 = 89.1

PowerEdge R920 (Intel Xeon E7-2880 v2, 2.50 GHz)

SPECfp_base2006 = 84.9

CPU2006 license: 55


Test date: Apr-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

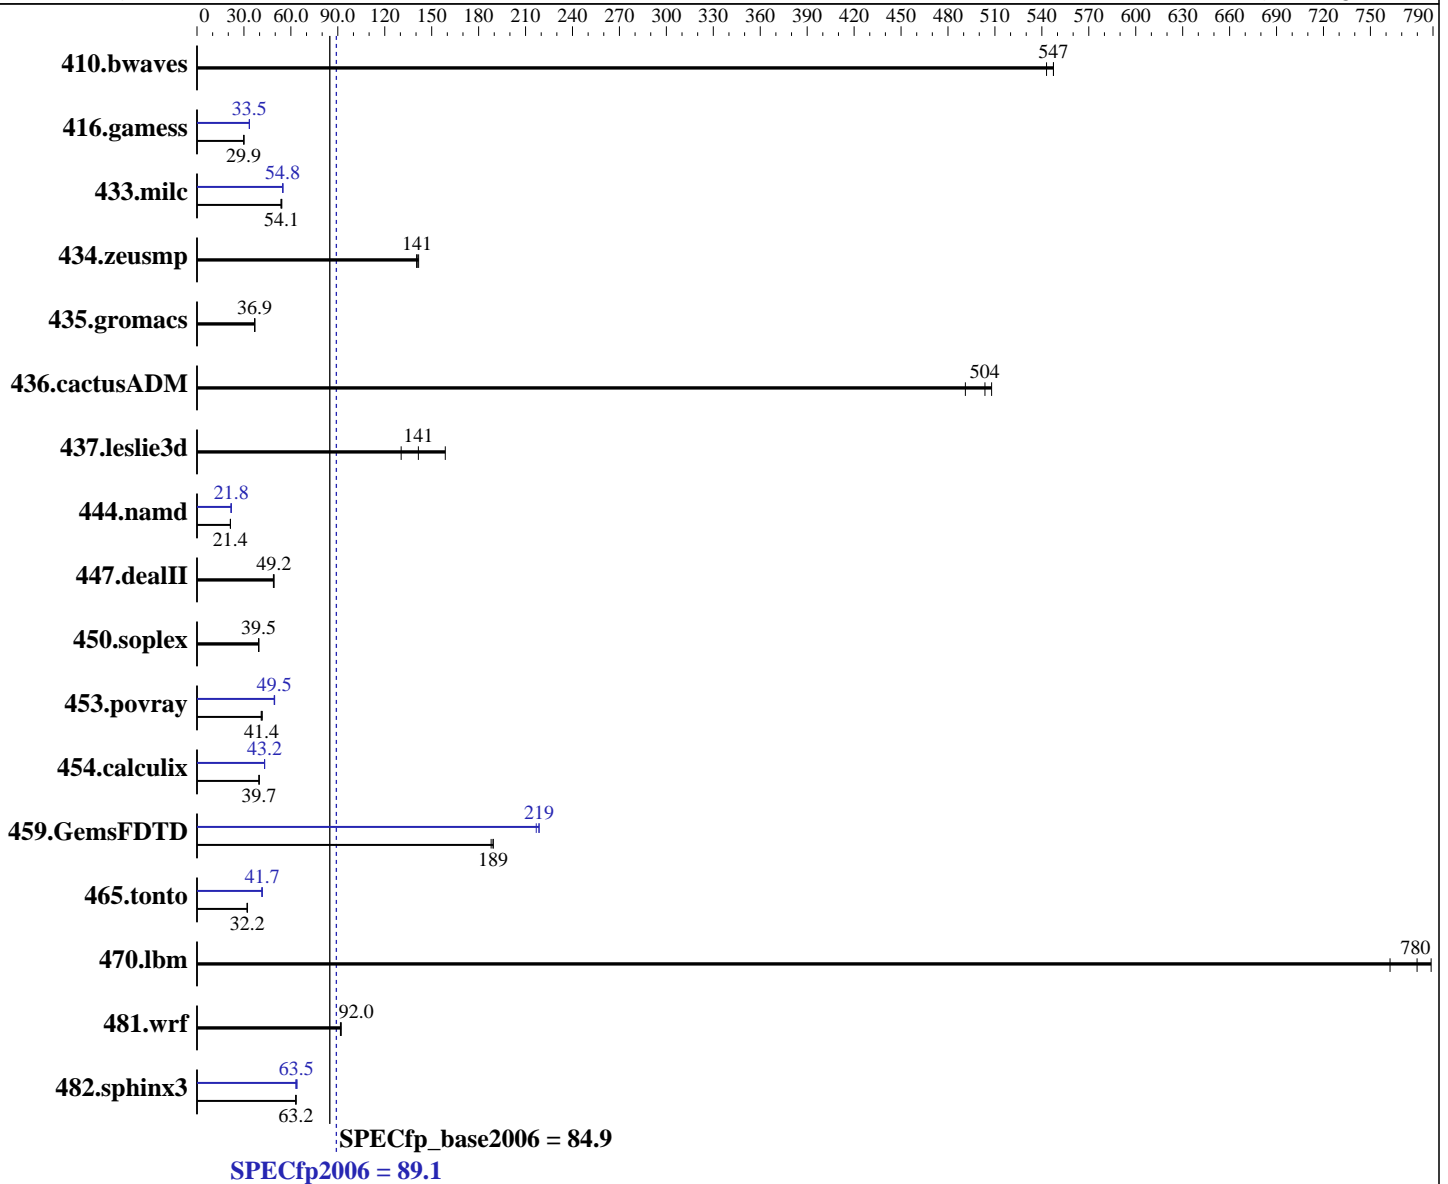

Hardware

CPU Name: Intel Xeon E7-2880 v2
 CPU Characteristics: Intel Turbo Boost Technology up to 3.10 GHz
 CPU MHz: 2500
 FPU: Integrated
 CPU(s) enabled: 30 cores, 2 chips, 15 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64)
 3.0.76-0.11-default
 Compiler: C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux;
 Fortran: Version 14.0.0.080 of Intel Fortran Studio XE for Linux
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 89.1

PowerEdge R920 (Intel Xeon E7-2880 v2, 2.50 GHz)

SPECfp_base2006 = 84.9

CPU2006 license: 55

Test date: Apr-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

L3 Cache: 37.5 MB I+D on chip per chip
Other Cache: None
Memory: 256 GB (32 x 8 GB 2Rx4 PC3L-12800R-11, ECC)
Disk Subsystem: 1 x 300 GB 15000 RPM SAS
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	25.0	543	24.8	547	<u>24.8</u>	<u>547</u>	25.0	543	24.8	547	<u>24.8</u>	<u>547</u>
416.gamess	655	29.9	<u>654</u>	<u>29.9</u>	653	30.0	584	33.5	586	33.4	<u>585</u>	<u>33.5</u>
433.milc	171	53.6	170	54.2	<u>170</u>	<u>54.1</u>	<u>167</u>	<u>54.8</u>	167	54.8	167	54.9
434.zeusmp	64.2	142	64.8	140	<u>64.6</u>	<u>141</u>	64.2	142	64.8	140	<u>64.6</u>	<u>141</u>
435.gromacs	<u>194</u>	<u>36.9</u>	194	36.9	194	36.9	<u>194</u>	<u>36.9</u>	194	36.9	194	36.9
436.cactusADM	24.3	491	23.5	508	<u>23.7</u>	<u>504</u>	24.3	491	23.5	508	<u>23.7</u>	<u>504</u>
437.leslie3d	59.2	159	<u>66.4</u>	<u>141</u>	72.0	130	59.2	159	<u>66.4</u>	<u>141</u>	72.0	130
444.namd	375	21.4	375	21.4	<u>375</u>	<u>21.4</u>	367	21.9	367	21.8	<u>367</u>	<u>21.8</u>
447.dealII	233	49.2	234	48.8	<u>233</u>	<u>49.2</u>	233	49.2	234	48.8	<u>233</u>	<u>49.2</u>
450.soplex	212	39.3	211	39.5	<u>211</u>	<u>39.5</u>	212	39.3	211	39.5	<u>211</u>	<u>39.5</u>
453.povray	130	41.0	128	41.7	<u>129</u>	<u>41.4</u>	108	49.4	<u>108</u>	<u>49.5</u>	107	49.6
454.calculix	208	39.6	<u>208</u>	<u>39.7</u>	208	39.7	<u>191</u>	<u>43.2</u>	191	43.2	191	43.2
459.GemsFDTD	<u>56.1</u>	<u>189</u>	56.4	188	56.0	189	48.5	219	48.9	217	<u>48.5</u>	<u>219</u>
465.tonto	308	32.0	<u>306</u>	<u>32.2</u>	305	32.3	<u>236</u>	<u>41.7</u>	236	41.7	237	41.4
470.lbm	17.4	789	<u>17.6</u>	<u>780</u>	18.0	763	17.4	789	<u>17.6</u>	<u>780</u>	18.0	763
481.wrf	<u>121</u>	<u>92.0</u>	122	91.7	121	92.1	<u>121</u>	<u>92.0</u>	122	91.7	121	92.1
482.sphinx3	309	63.1	307	63.4	<u>308</u>	<u>63.2</u>	308	63.2	305	64.0	<u>307</u>	<u>63.5</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

Platform Notes

BIOS settings:
Virtualization Technology disabled
Execute Disable disabled
System Profile set to Custom
ClE set to enabled
C States set to enabled
Sysinfo program /root/CPU2006-1.2/config/sysinfo.rev6818
\$Rev: 6818 \$ \$Date:: 2012-07-17 #\$ e86d102572650a6e4d596a3cee98f191
running on R920-SL11SP3 Fri Apr 18 10:33:05 2014

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 89.1

PowerEdge R920 (Intel Xeon E7-2880 v2, 2.50 GHz)

SPECfp_base2006 = 84.9

CPU2006 license: 55

Test date: Apr-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

Platform Notes (Continued)

This section contains SUT (System Under Test) info as seen by some common utilities. To remove or add to this section, see: <http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

```

From /proc/cpuinfo
model name      : Intel(R) Xeon(R) CPU E7-2880 v2 @ 2.50GHz
 2 "physical id"s (chips)
 60 "processors"
cores, siblings (Caution: counting these is hw and system dependent. The
following excerpts from /proc/cpuinfo might not be reliable. Use with
caution.)
  cpu cores    : 15
  siblings     : 30
  physical 0   : cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
  physical 1   : cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14
cache size     : 38400 KB

```

```

From /proc/meminfo
MemTotal:      264594020 kB
HugePages_Total: 0
Hugepagesize:  2048 kB

```

```

/usr/bin/lsb_release -d
SUSE Linux Enterprise Server 11 (x86_64)

```

```

From /etc/*release* /etc/*version*
SuSE-release:
SUSE Linux Enterprise Server 11 (x86_64)
VERSION = 11
PATCHLEVEL = 3

```

```

uname -a:
Linux R920-SL11SP3 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
(ccab990) x86_64 x86_64 x86_64 GNU/Linux

```

run-level 3 Apr 18 10:32 last=S

```

SPEC is set to: /root/CPU2006-1.2
Filesystem      Type  Size  Used Avail Use% Mounted on
/dev/sda1       ext2  266G  14G  252G   6% /

```

```

Additional information from dmidecode:
BIOS Dell Inc. 1.1.0 03/07/2014
Memory:
 29x 00CE00B300CE M393B1G73QH0-YK0 8 GB 1333 MHz
  3x 00CE04B300CE M393B1G73QH0-YK0 8 GB 1333 MHz

```

(End of data from sysinfo program)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 89.1

PowerEdge R920 (Intel Xeon E7-2880 v2, 2.50 GHz)

SPECfp_base2006 = 84.9

CPU2006 license: 55

Test date: Apr-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

General Notes

Environment variables set by runspec before the start of the run:

KMP_AFFINITY = "granularity=fine,compact,1,0"

LD_LIBRARY_PATH = "/root/CPU2006-1.2/libs/32:/root/CPU2006-1.2/libs/64:/root/CPU2006-1.2/sh"

OMP_NUM_THREADS = "30"

Binaries compiled on a system with 1x Core i7-860 CPU + 8GB memory using RedHat EL 6.4

Transparent Huge Pages enabled with:

echo always > /sys/kernel/mm/transparent_hugepage/enabled

Filesystem page cache cleared with:

echo 1> /proc/sys/vm/drop_caches

runspec command invoked through numactl i.e.:

numactl --interleave=all runspec <etc>

Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 89.1

PowerEdge R920 (Intel Xeon E7-2880 v2, 2.50 GHz)

SPECfp_base2006 = 84.9

CPU2006 license: 55

Test date: Apr-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -parallel -opt-prefetch -ansi-alias

Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: -xAVX -ipo -O3 -no-prec-div -unroll2 -ansi-alias
-parallel

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 89.1

PowerEdge R920 (Intel Xeon E7-2880 v2, 2.50 GHz)

SPECfp_base2006 = 84.9

CPU2006 license: 55

Test date: Apr-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml>
<http://www.spec.org/cpu2006/flags/Dell-Platform-Settings-V1.2-revC.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 89.1

PowerEdge R920 (Intel Xeon E7-2880 v2, 2.50 GHz)

SPECfp_base2006 = 84.9

CPU2006 license: 55

Test date: Apr-2014

Test sponsor: Dell Inc.

Hardware Availability: Mar-2014

Tested by: Dell Inc.

Software Availability: Aug-2013

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:00:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 20 May 2014.