



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp<sup>®</sup>2006 = **88.6**

Huawei RH5885H v3 (Intel Xeon E7-4870 v2)

SPECfp\_base2006 = **84.8**

CPU2006 license: 3175


Test sponsor: Huawei

Tested by: Huawei

Test date: May-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

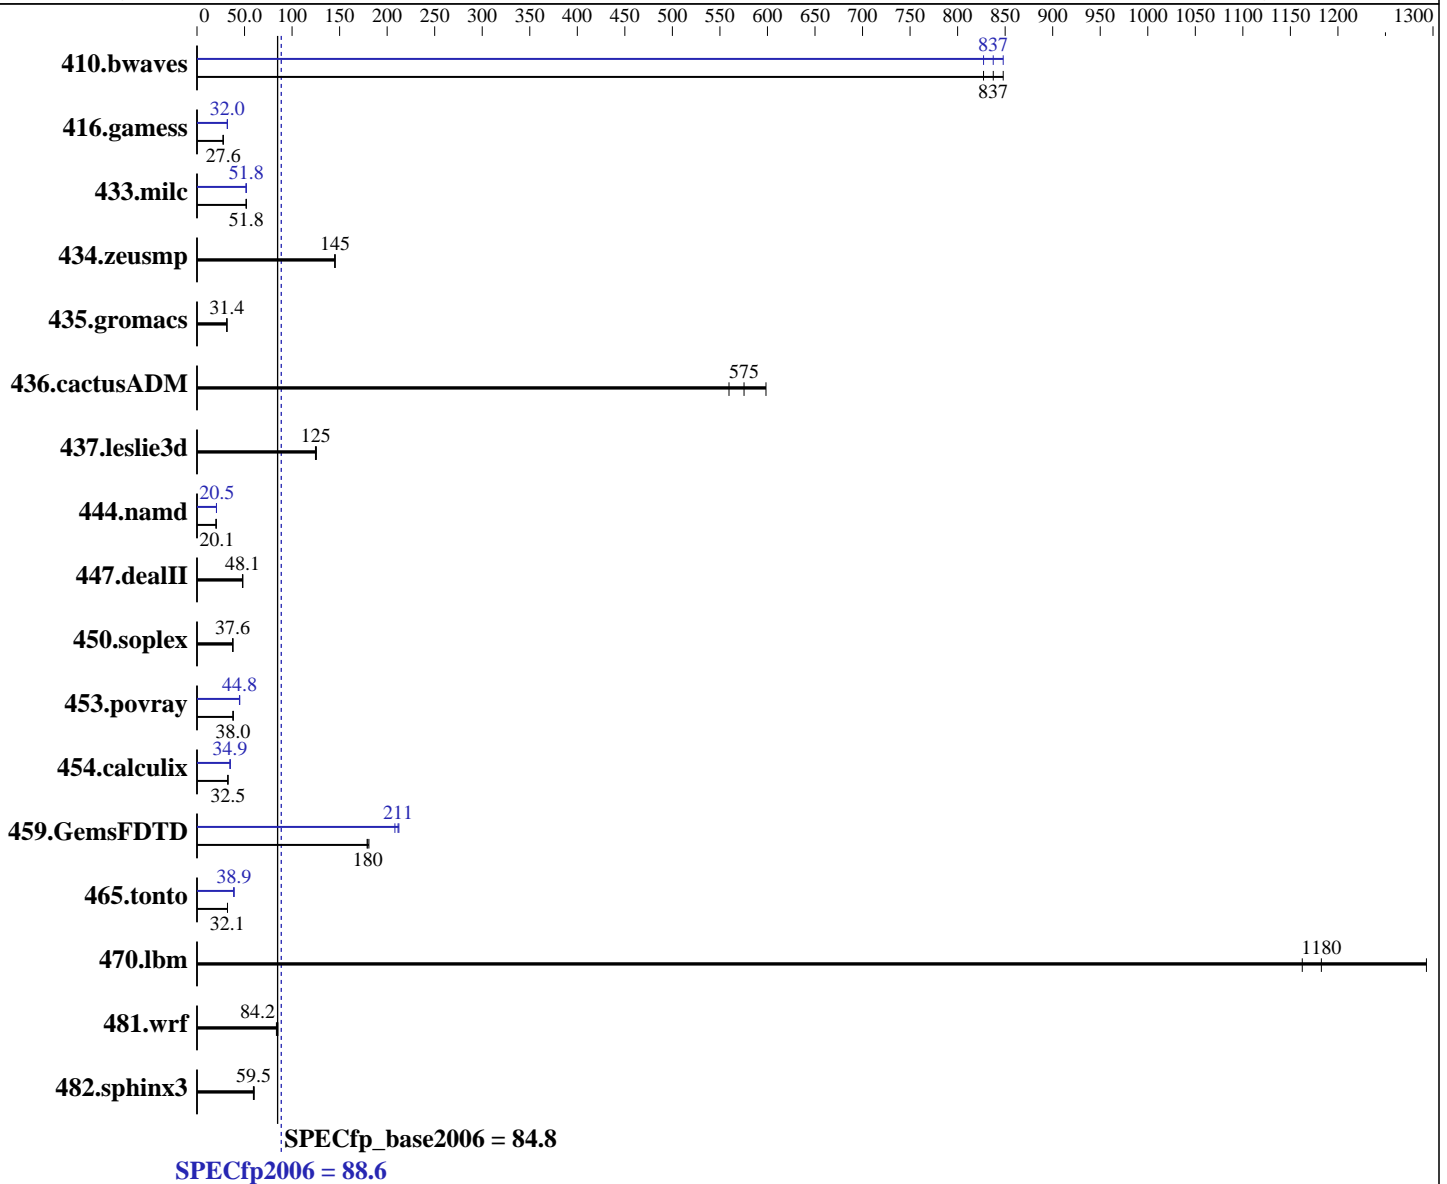

### Hardware

CPU Name: Intel Xeon E7-4870 v2  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.90 GHz  
 CPU MHz: 2300  
 FPU: Integrated  
 CPU(s) enabled: 60 cores, 4 chips, 15 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux Server release 6.5 (Santiago)  
 2.6.32-431.el6.x86\_64  
 Compiler: C/C++: Version 12.1.0.225 of Intel C++ Studio XE for Linux;  
 Fortran: Version 12.1.0.225 of Intel Fortran Studio XE for Linux  
 Auto Parallel: Yes  
 File System: ext4

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Huawei

SPECfp2006 = **88.6**

Huawei RH5885H v3 (Intel Xeon E7-4870 v2)

SPECfp\_base2006 = **84.8**

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

L3 Cache: 30 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 512 GB (32 x 16 GB 2Rx4 PC3-12800R-11, ECC)  
 Disk Subsystem: 2 x 300 GB SAS, 10K RPM  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16.0	848	<b>16.2</b>	<b>837</b>	16.4	827	16.4	827	<b>16.2</b>	<b>837</b>	16.0	848
416.gamess	712	27.5	709	27.6	<b>710</b>	<b>27.6</b>	613	31.9	<b>613</b>	<b>32.0</b>	612	32.0
433.milc	177	51.8	177	51.8	<b>177</b>	<b>51.8</b>	<b>177</b>	<b>51.8</b>	177	51.8	177	51.7
434.zeusmp	62.8	145	62.6	145	<b>62.6</b>	<b>145</b>	62.8	145	62.6	145	<b>62.6</b>	<b>145</b>
435.gromacs	227	31.4	227	31.5	<b>227</b>	<b>31.4</b>	227	31.4	227	31.5	<b>227</b>	<b>31.4</b>
436.cactusADM	<b>20.8</b>	<b>575</b>	20.0	598	21.4	560	<b>20.8</b>	<b>575</b>	20.0	598	21.4	560
437.leslie3d	74.8	126	75.4	125	<b>75.2</b>	<b>125</b>	74.8	126	75.4	125	<b>75.2</b>	<b>125</b>
444.namd	<b>398</b>	<b>20.1</b>	398	20.1	398	20.1	<b>391</b>	<b>20.5</b>	391	20.5	392	20.5
447.dealII	<b>238</b>	<b>48.1</b>	238	48.1	239	47.8	<b>238</b>	<b>48.1</b>	238	48.1	239	47.8
450.soplex	222	37.6	221	37.8	<b>222</b>	<b>37.6</b>	222	37.6	221	37.8	<b>222</b>	<b>37.6</b>
453.povray	139	38.2	<b>140</b>	<b>38.0</b>	141	37.8	119	44.9	<b>119</b>	<b>44.8</b>	119	44.7
454.calculix	<b>254</b>	<b>32.5</b>	253	32.6	255	32.4	237	34.9	<b>237</b>	<b>34.9</b>	237	34.9
459.GemsFDTD	58.7	181	59.3	179	<b>59.1</b>	<b>180</b>	50.0	212	51.0	208	<b>50.2</b>	<b>211</b>
465.tonto	307	32.1	<b>307</b>	<b>32.1</b>	307	32.1	254	38.7	253	38.9	<b>253</b>	<b>38.9</b>
470.lbm	11.8	1160	<b>11.6</b>	<b>1180</b>	10.6	1290	11.8	1160	<b>11.6</b>	<b>1180</b>	10.6	1290
481.wrf	134	83.5	<b>133</b>	<b>84.2</b>	131	85.1	134	83.5	<b>133</b>	<b>84.2</b>	131	85.1
482.sphinx3	<b>327</b>	<b>59.5</b>	324	60.2	329	59.3	<b>327</b>	<b>59.5</b>	324	60.2	329	59.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

Stack size set to unlimited using "ulimit -s unlimited"

## Platform Notes

BIOS configuration:  
 Set Power Efficiency Mode to Performance  
 Set Lock\_step to disabled  
 Baseboard Management Controller used to adjust the fan speed to 100%  
 Set Intel Hyper Threading to disabled  
 Sysinfo program /spec/config/sysinfo.rev6800  
 \$Rev: 6800 \$ \$Date:: 2011-10-11 #\$ 6f2ebdff5032aaa42e583f96b07f99d3  
 running on memtest Tue May 13 17:24:38 2014

This section contains SUT (System Under Test) info as seen by  
Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp2006 = 88.6**

**Huawei RH5885H v3 (Intel Xeon E7-4870 v2)**

**SPECfp\_base2006 = 84.8**

**CPU2006 license:** 3175

**Test sponsor:** Huawei

**Tested by:** Huawei

**Test date:** May-2014

**Hardware Availability:** Feb-2014

**Software Availability:** Nov-2013

## Platform Notes (Continued)

some common utilities. To remove or add to this section, see:  
<http://www.spec.org/cpu2006/Docs/config.html#sysinfo>

From /proc/cpuinfo

model name : Intel(R) Xeon(R) CPU E7-4870 v2 @ 2.30GHz

4 "physical id"s (chips)

60 "processors"

cores, siblings (Caution: counting these is hw and system dependent. The following excerpts from /proc/cpuinfo might not be reliable. Use with caution.)

cpu cores : 15

siblings : 15

physical 0: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

physical 1: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

physical 2: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

physical 3: cores 0 1 2 3 4 5 6 7 8 9 10 11 12 13 14

cache size : 30720 KB

From /proc/meminfo

MemTotal: 529105780 kB

HugePages\_Total: 0

Hugepagesize: 2048 kB

/usr/bin/lsb\_release -d

Red Hat Enterprise Linux Server release 6.5 (Santiago)

From /etc/\*release\* /etc/\*version\*

redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)

system-release-cpe: cpe:/o:redhat:enterprise\_linux:6server:ga:server

uname -a:

Linux memtest 2.6.32-431.el6.x86\_64 #1 SMP Sun Nov 10 22:19:54 EST 2013

x86\_64 x86\_64 x86\_64 GNU/Linux

run-level 3 May 13 17:22

SPEC is set to: /spec

Filesystem	Type	Size	Used	Avail	Use%	Mounted on
/dev/sda2	ext4	259G	76G	171G	31%	/

Additional information from dmidecode:

Memory:

32x Samsung M393B2G70BH0-CK0 16 GB 1600 MHz 2 rank

(End of data from sysinfo program)

Regarding the sysinfo display about the memory installed, the correct amount of memory is 512 GB and the dmidecode description should have two lines reading as:

32x Samsung M393B2G70BH0-CK0 16 GB 1600 MHz 2 rank



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 88.6

Huawei RH5885H v3 (Intel Xeon E7-4870 v2)

SPECfp\_base2006 = 84.8

CPU2006 license: 3175

Test date: May-2014

Test sponsor: Huawei

Hardware Availability: Feb-2014

Tested by: Huawei

Software Availability: Nov-2013

## General Notes

Environment variables set by runspec before the start of the run:

```
KMP_AFFINITY = "granularity=fine,compact,0,1"
LD_LIBRARY_PATH = "/spec/libs/32:/spec/libs/64"
OMP_NUM_THREADS = "60"
```

Binaries compiled on a system with 2 x Xeon X5645 CPU + 16GB memory using RHEL 6.1

Transparent Huge Pages enabled with:

```
echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

## Base Compiler Invocation

C benchmarks:

```
icc -m64
```

C++ benchmarks:

```
icpc -m64
```

Fortran benchmarks:

```
ifort -m64
```

Benchmarks using both Fortran and C:

```
icc -m64 ifort -m64
```

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Huawei**

**SPECfp2006 = 88.6**

**Huawei RH5885H v3 (Intel Xeon E7-4870 v2)**

**SPECfp\_base2006 = 84.8**

**CPU2006 license:** 3175  
**Test sponsor:** Huawei  
**Tested by:** Huawei

**Test date:** May-2014  
**Hardware Availability:** Feb-2014  
**Software Availability:** Nov-2013

## Base Optimization Flags

C benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

C++ benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -opt-prefetch -ansi-alias

Fortran benchmarks:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xAVX -ipo -O3 -no-prec-div -static -parallel -opt-prefetch  
-ansi-alias

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -static -auto-ilp32  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 88.6

Huawei RH5885H v3 (Intel Xeon E7-4870 v2)

SPECfp\_base2006 = 84.8

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -fno-alias  
-auto-ilp32

447.dealIII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xAVX -ipo -O3 -no-prec-div -opt-prefetch -parallel  
-static

416.gamess: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -scalar-rep- -static

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -unroll2  
-inline-level=0 -opt-prefetch -parallel

465.tonto: -xAVX(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -prof-use(pass 2) -inline-calloc  
-opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: basepeak = yes

436.cactusADM: basepeak = yes

454.calculix: -xAVX -ipo -O3 -no-prec-div -auto-ilp32 -ansi-alias

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.html>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.html>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Huawei

SPECfp2006 = 88.6

Huawei RH5885H v3 (Intel Xeon E7-4870 v2)

SPECfp\_base2006 = 84.8

CPU2006 license: 3175

Test sponsor: Huawei

Tested by: Huawei

Test date: May-2014

Hardware Availability: Feb-2014

Software Availability: Nov-2013

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic12.1-official-linux64.20120425.xml>

<http://www.spec.org/cpu2006/flags/Huawei-Platform-Settings-V1.0-IVB-RevG.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.2.  
Report generated on Thu Jul 24 23:59:30 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 4 June 2014.