SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B420 M3 (Intel Xeon E5-4657L v2, 2.40 GHz)

SPECint®_rate2006 = 1790

SPECint_rate_base2006 = 1730

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: May-2014
Hardware Availability: Apr-2014
Software Availability: Apr-2014

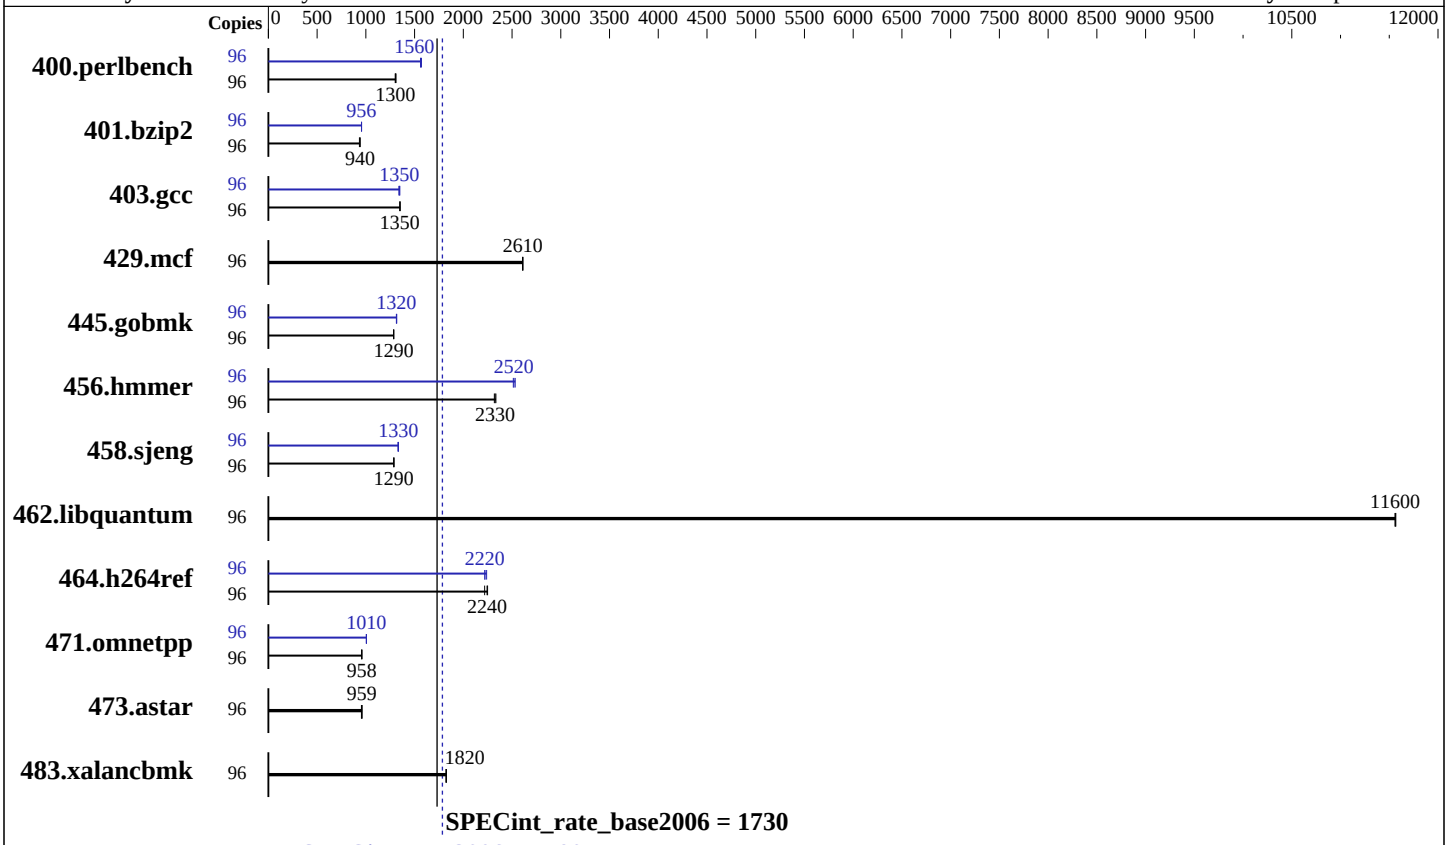

Hardware

CPU Name:	Intel Xeon E5-4657L v2
CPU Characteristics:	Intel Turbo Boost Technology up to 2.90 GHz
CPU MHz:	2400
FPU:	Integrated
CPU(s) enabled:	48 cores, 4 chips, 12 cores/chip, 2 threads/core
CPU(s) orderable:	1,2,3,4 chip
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	30 MB I+D on chip per chip
Other Cache:	None
Memory:	256 GB (32 x 8 GB 2Rx4 PC3-14900R-13, ECC)
Disk Subsystem:	1 X 300 GB 15000 RPM SAS
Other Hardware:	None

Software

Operating System:	Red Hat Enterprise Linux Server release 6.5 (Santiago) 2.6.32-431.el6.x86_64
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext4
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Cisco Systems

Cisco UCS B420 M3 (Intel Xeon E5-4657L v2, 2.40 GHz)

SPECint_rate2006 = 1790

SPECint_rate_base2006 = 1730

CPU2006 license: 9019
Test sponsor: Cisco Systems
Tested by: Cisco Systems

Test date: May-2014
Hardware Availability: Apr-2014
Software Availability: Apr-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	96	720	1300	**720**	**1300**	716	1310	96	597	1570	601	1560	**600**	**1560**
401.bzip2	96	**985**	**940**	985	941	992	934	96	969	956	**969**	**956**	970	955
403.gcc	96	572	1350	573	1350	**573**	**1350**	96	573	1350	**574**	**1350**	577	1340
429.mcf	96	335	2610	**335**	**2610**	336	2610	96	335	2610	**335**	**2610**	336	2610
445.gobmk	96	783	1290	784	1290	**783**	**1290**	96	765	1320	767	1310	**765**	**1320**
456.hmmer	96	**385**	**2330**	386	2320	384	2330	96	354	2530	356	2510	**355**	**2520**
458.sjeng	96	902	1290	903	1290	**902**	**1290**	96	870	1340	**871**	**1330**	874	1330
462.libquantum	96	**172**	**11600**	172	11600	172	11600	96	**172**	**11600**	172	11600	172	11600
464.h264ref	96	**947**	**2240**	945	2250	957	2220	96	957	2220	949	2240	**956**	**2220**
471.omnetpp	96	**626**	**958**	626	959	627	958	96	597	1000	596	1010	**597**	**1010**
473.astar	96	706	955	**703**	**959**	701	961	96	706	955	**703**	**959**	701	961
483.xalancbmk	96	363	1820	**363**	**1820**	363	1830	96	363	1820	**363**	**1820**	363	1830

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The numactl mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate numactl commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Intel HT Technology = Enabled
CPU performance set to HPC
Power Technology set to Custom
CPU Power State C6 set to Disabled
CPU Power State C1 Enhanced set to Disabled
Memory RAS configuration set to Maximum Performance
DRAM Clock Throttling Set to Performance
 Sysinfo program /opt/cpu2006-1.4/config/sysinfo.rev6818
 $Rev: 6818 $ $Date:: 2012-07-17 #$ e86d102572650a6e4d596a3cee98f191
 running on b420m3 Mon May 12 23:38:06 2014

 This section contains SUT (System Under Test) info as seen by
 some common utilities.  To remove or add to this section, see:
   http://www.spec.org/cpu2006/Docs/config.html#sysinfo

 From /proc/cpuinfo
    model name : Intel(R) Xeon(R) CPU E5-4657L v2 @ 2.40GHz
```

Continued on next page

Platform Notes (Continued)

```
        4 "physical id"s (chips)
        96 "processors"
     cores, siblings (Caution: counting these is hw and system dependent.  The
     following excerpts from /proc/cpuinfo might not be reliable.  Use with
     caution.)
        cpu cores : 12
        siblings  : 24
        physical 0: cores 0 1 2 3 4 5 8 9 10 11 12 13
        physical 1: cores 0 1 2 3 4 5 8 9 10 11 12 13
        physical 2: cores 0 1 2 3 4 5 8 9 10 11 12 13
        physical 3: cores 0 1 2 3 4 5 8 9 10 11 12 13
     cache size : 30720 KB

  From /proc/meminfo
     MemTotal:       264493700 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     Red Hat Enterprise Linux Server release 6.5 (Santiago)

  From /etc/*release* /etc/*version*
     redhat-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
     system-release: Red Hat Enterprise Linux Server release 6.5 (Santiago)
     system-release-cpe: cpe:/o:redhat:enterprise_linux:6server:ga:server

  uname -a:
     Linux b420m3 2.6.32-431.el6.x86_64 #1 SMP Sun Nov 10 22:19:54 EST 2013 x86_64
     x86_64 x86_64 GNU/Linux

  run-level 3 May 12 01:33

  SPEC is set to: /opt/cpu2006-1.4
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda1      ext4  275G   11G  250G   5% /

  Additional information from dmidecode:
    BIOS Cisco Systems, Inc. B420M3.2.2.1.8.042120142113 04/21/2014
    Memory:
     32x 0xAD00 HMT31GR7EFR4C-RD 8 GB 1866 MHz 2 rank
     16x NO DIMM NO DIMM

  (End of data from sysinfo program)
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/opt/cpu2006-1.4/libs/32:/opt/cpu2006-1.4/libs/64:/opt/cpu2006-1.4/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RedHat EL 6.4
```

Continued on next page

General Notes (Continued)

```
 Transparent Huge Pages enabled with:
 echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
 Filesystem page cache cleared with:
 echo 1>       /proc/sys/vm/drop_caches
 runspec command invoked through numactl i.e.:
 numactl --interleave=all runspec <etc>

Submitted_by: "Sheshgiri I (shei)" <shei@cisco.com>
Submitted: Mon May 19 14:36:26 EDT 2014
Submission: cpu2006-20140519-29611.sub
```

Base Compiler Invocation

C benchmarks:
```
icc  -m32
```

C++ benchmarks:
```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
```

C++ benchmarks:
```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3
-Wl,-z,muldefs -L/sh -lsmartheap
```

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
icc -m32

400.perlbench: icc -m64

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks:
icpc -m32

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

Continued on next page

Peak Optimization Flags (Continued)

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.html

You can also download the XML flags sources by saving the following links:
http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml
http://www.spec.org/cpu2006/flags/Cisco-Platform-Settings-V1.2-revB.xml

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 23:56:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 June 2014.