SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Unisys Corporation

Forward! 2100 (1-core partition)

SPECint®_rate2006 = 54.2

SPECint_rate_base2006 = 51.9

CPU2006 license: 15
Test sponsor: Unisys Corporation
Tested by: Unisys Corporation

Test date: May-2014
Hardware Availability: Jun-2014
Software Availability: Jun-2014

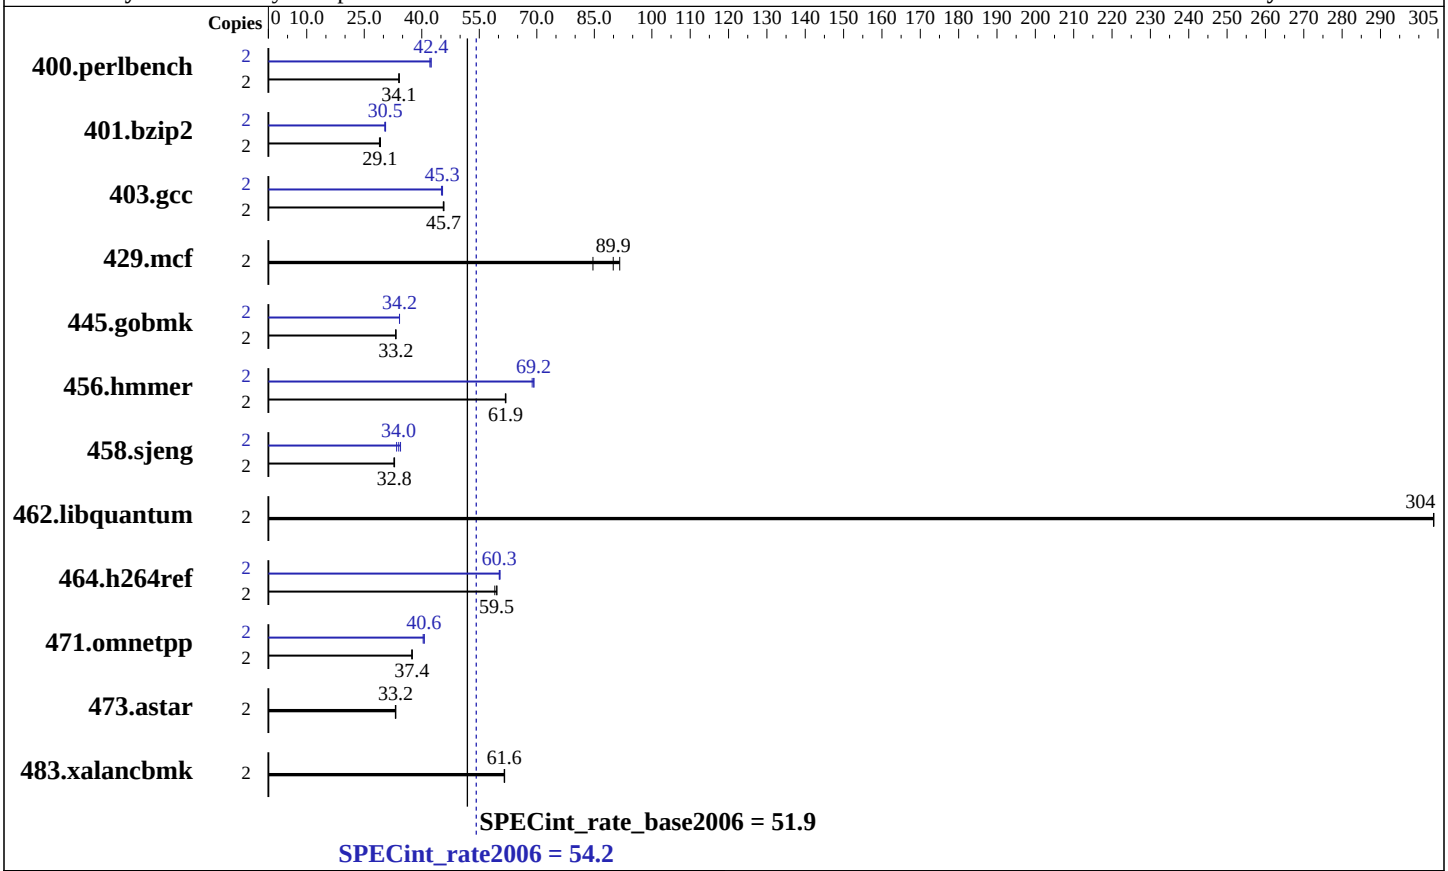

Hardware

CPU Name:	Intel Xeon E5-2690 v2
CPU Characteristics:	Intel Turbo Boost Technology up to 3.60 GHz
CPU MHz:	3000
FPU:	Integrated
CPU(s) enabled:	1 core, 1 chip, 10 cores/chip, 2 threads/core
CPU(s) orderable:	2 chips
Primary Cache:	32 KB I + 32 KB D on chip per core
Secondary Cache:	256 KB I+D on chip per core
L3 Cache:	25 MB I+D on chip per chip
Other Cache:	None
Memory:	128 GB (8 x 16 GB 2Rx4 PC3-12800R-11, ECC) 4 GB allocated to partition
Disk Subsystem:	8 x 600 GB 15K SAS RAID-DP
Other Hardware:	None

Software

Operating System:	SUSE Linux Enterprise Server 11 (x86_64) 3.0.76-0.11-default
Compiler:	C/C++: Version 14.0.0.080 of Intel C++ Studio XE for Linux
Auto Parallel:	No
File System:	ext3
System State:	Run level 3 (multi-user)
Base Pointers:	32-bit
Peak Pointers:	32/64-bit
Other Software:	Microquill SmartHeap V10.0

SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Unisys Corporation
Forward! 2100 (1-core partition)

SPECint_rate2006 = 54.2

SPECint_rate_base2006 = 51.9

CPU2006 license: 15
Test sponsor: Unisys Corporation
Tested by: Unisys Corporation

Test date: May-2014
Hardware Availability: Jun-2014
Software Availability: Jun-2014

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	573	34.1	574	34.0	**573**	**34.1**	2	461	42.4	464	42.1	**461**	**42.4**
401.bzip2	2	**663**	**29.1**	660	29.2	666	29.0	2	631	30.6	**633**	**30.5**	636	30.4
403.gcc	2	352	45.8	353	45.6	**352**	**45.7**	2	354	45.4	**355**	**45.3**	357	45.1
429.mcf	2	216	84.6	**203**	**89.9**	199	91.6	2	216	84.6	**203**	**89.9**	199	91.6
445.gobmk	2	**631**	**33.2**	631	33.3	632	33.2	2	**614**	**34.2**	613	34.2	614	34.2
456.hmmer	2	**301**	**61.9**	302	61.8	301	61.9	2	269	69.3	**270**	**69.2**	271	68.8
458.sjeng	2	735	32.9	**737**	**32.8**	739	32.8	2	724	33.4	702	34.5	**712**	**34.0**
462.libquantum	2	136	304	**136**	**304**	136	304	2	136	304	**136**	**304**	136	304
464.h264ref	2	750	59.0	**743**	**59.5**	743	59.6	2	735	60.2	732	60.4	**734**	**60.3**
471.omnetpp	2	**334**	**37.4**	333	37.5	334	37.4	2	**308**	**40.6**	310	40.4	308	40.6
473.astar	2	423	33.2	**423**	**33.2**	424	33.1	2	423	33.2	**423**	**33.2**	424	33.1
483.xalancbmk	2	224	61.6	224	61.5	**224**	**61.6**	2	224	61.6	224	61.5	**224**	**61.6**

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

```
The taskset mechanism was used to bind copies to processors. The config file option 'submit'
was used to generate taskset commands to bind each copy to a specific processor.
For details, please see the config file.
```

Operating System Notes

```
Stack size set to unlimited using "ulimit -s unlimited"
```

Platform Notes

```
Sysinfo program /opt/cpu2006.1.2/config/sysinfo.rev6818
$Rev: 6818 $ $Date:: 2012-07-17 #$ f4f716b9827353cbfded47e832667cd7
running on SPEC-AXS Wed May 28 06:43:53 2014

This section contains SUT (System Under Test) info as seen by
some common utilities.  To remove or add to this section, see:
  http://www.spec.org/cpu2006/Docs/config.html#sysinfo

From /proc/cpuinfo
   model name : Intel(R) Xeon(R) CPU E5-2690 v2 @ 3.00GHz
      1 "physical id"s (chips)
      2 "processors"
   cores, siblings (Caution: counting these is hw and system dependent.  The
   following excerpts from /proc/cpuinfo might not be reliable.  Use with
   caution.)
      cpu cores : 1
      siblings  : 2
```

Continued on next page

Platform Notes (Continued)

```
        physical 0: cores 0
     cache size : 25600 KB

  From /proc/meminfo
     MemTotal:        3837656 kB
     HugePages_Total:       0
     Hugepagesize:       2048 kB

  /usr/bin/lsb_release -d
     SUSE Linux Enterprise Server 11 (x86_64)

  From /etc/*release* /etc/*version*
     SuSE-release:
        SUSE Linux Enterprise Server 11 (x86_64)
        VERSION = 11
        PATCHLEVEL = 3

  uname -a:
     Linux SPEC-AXS 3.0.76-0.11-default #1 SMP Fri Jun 14 08:21:43 UTC 2013
     (ccab990) x86_64 x86_64 x86_64 GNU/Linux

  run-level 3 May 28 06:41 last=S

  SPEC is set to: /opt/cpu2006.1.2
     Filesystem     Type  Size  Used Avail Use% Mounted on
     /dev/sda1      ext3  296G   76G  219G  26% /opt/cpu2006.1.2

  (End of data from sysinfo program)

  Reporting on a 1-core, 4GB partition using
  Unisys' Secure Partitioning - s-Par(R) from a 20-core, 128GB system
```

General Notes

```
 Environment variables set by runspec before the start of the run:
 LD_LIBRARY_PATH = "/opt/cpu2006.1.2/libs/32:/opt/cpu2006.1.2/libs/64:/opt/cpu2006.1.2/sh"

  Binaries compiled on a system with 1x Core i7-860 CPU + 8GB
  memory using RedHat EL 6.4
  Transparent Huge Pages enabled with:
  echo always > /sys/kernel/mm/redhat_transparent_hugepage/enabled
```

Base Compiler Invocation

C benchmarks:

```
icc  -m32
```

C++ benchmarks:

```
icpc -m32
```

Base Portability Flags

400.perlbench: `-DSPEC_CPU_LINUX_IA32`
462.libquantum: `-DSPEC_CPU_LINUX`
483.xalancbmk: `-DSPEC_CPU_LINUX`

Base Optimization Flags

C benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`

C++ benchmarks:
`-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -opt-mem-layout-trans=3`
`-Wl,-z,muldefs -L/sh -lsmartheap`

Base Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

Peak Compiler Invocation

C benchmarks (except as noted below):
`icc -m32`

400.perlbench: `icc -m64`

401.bzip2: `icc -m64`

456.hmmer: `icc -m64`

458.sjeng: `icc -m64`

C++ benchmarks:
`icpc -m32`

Peak Portability Flags

400.perlbench: `-DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64`
401.bzip2: `-DSPEC_CPU_LP64`
456.hmmer: `-DSPEC_CPU_LP64`
458.sjeng: `-DSPEC_CPU_LP64`

Continued on next page

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -auto-ilp32

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -opt-prefetch -auto-ilp32 -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div

429.mcf: basepeak = yes

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -ansi-alias -opt-mem-layout-trans=3

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -unroll2 -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2) -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs -L/sh -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: `-Dalloca=_alloca`

The flags files that were used to format this result can be browsed at
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.html`
`http://www.spec.org/cpu2006/flags/Unisys-Platform-Settings-V1.2-revA.html`

You can also download the XML flags sources by saving the following links:
`http://www.spec.org/cpu2006/flags/Intel-ic14.0-official-linux64.20140128.xml`
`http://www.spec.org/cpu2006/flags/Unisys-Platform-Settings-V1.2-revA.xml`

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.2.
Report generated on Thu Jul 24 22:46:11 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 24 June 2014.